


# envelope\_w



Named for its shape, the Envelope path marker's elegant lines and finish make it particularly suitable for foot traffic areas, and provide an attractive addition to walls.




#### **Materials**

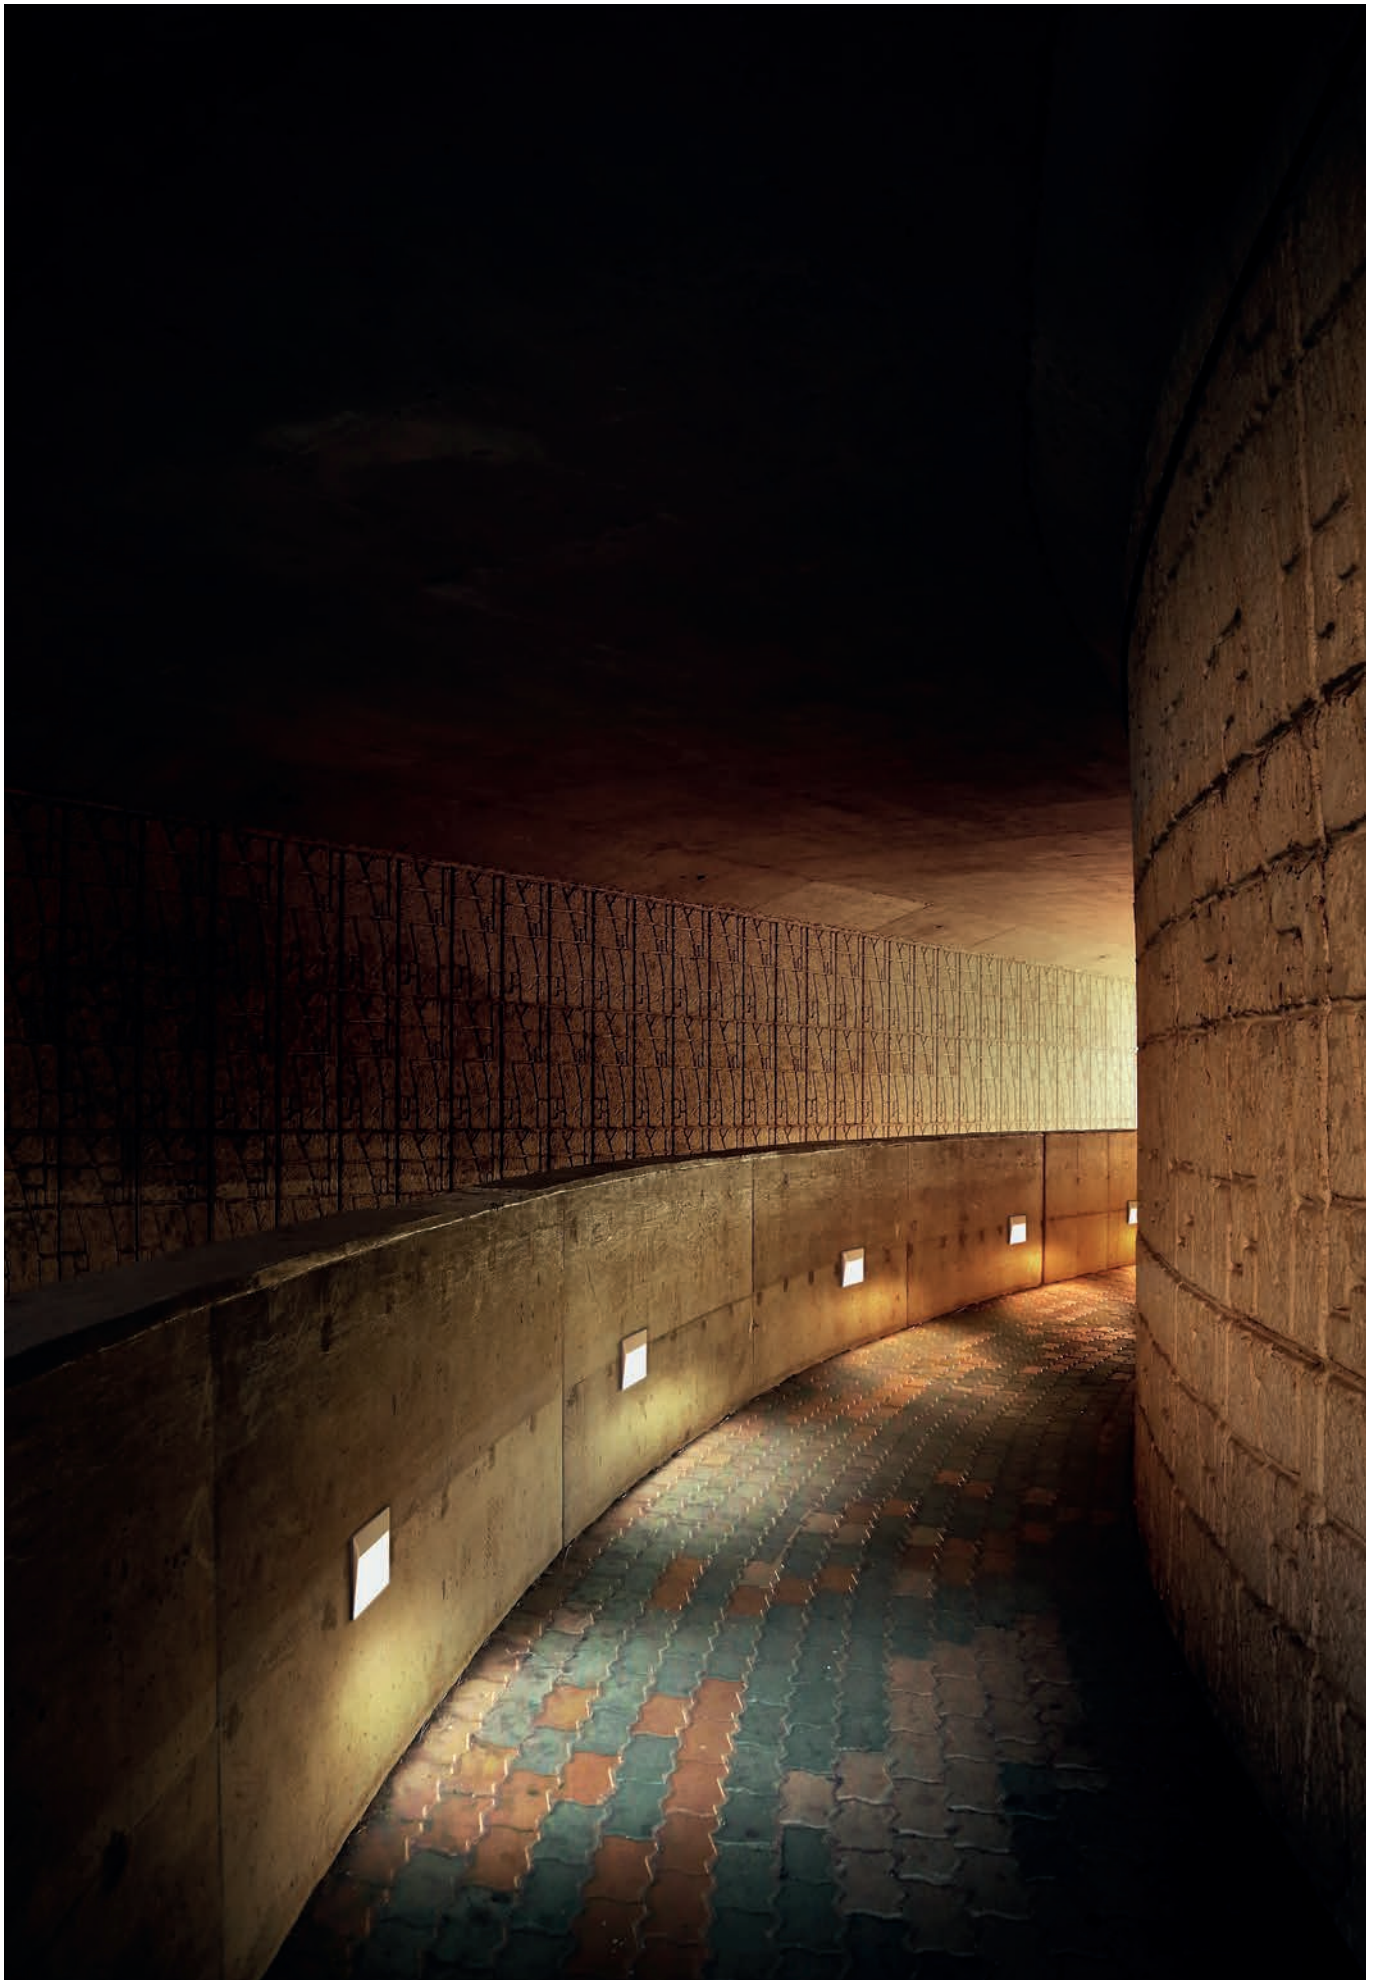Aluminum body



# envelope\_W range



	Envelope_1	Envelope_W	Envelope_W Pro
<b>1 W</b>	1.6 x 1.6 in	4.7 x 3.5 in	
<b>7 W</b>	-	-	6.7 x 6.6 in
<b>11 W / 17 W</b>	-	-	10.6 x 4.9 in
<b>Finish</b>			
<b>topLED</b>	2700K 3000K 4000K	3000K 4000K	3000K 4000K
<b>Optics</b>	Asymmetric	Asymmetric	Asymmetric
<b>Driver</b>	0-10V	0-10V	0-10V

---

### Simple, elegant and minimalist

Envelope consists of a single compact element, with the screws hidden from view. The bayonet fitting makes it quick and easy to install, and the casing can be concealed for even greater aesthetic impact. Can also be fitted using a bracket.



---

### Finishes

Choice of four:


- white RAL9003
- classic grey RAL9006
- anthracite grey RAL7021
- Cor-ten




---

### Recessed optic, asymmetric design

The recessed source is hidden from view, so the unit offers full cutoff: all you see is the clean, attractive beam. The slightly asymmetric design directs it towards the path.

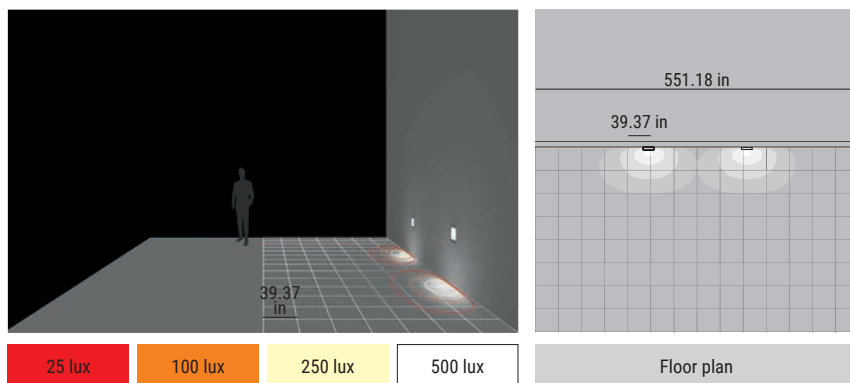

Envelope | Path-marker | powerLED | Wet location | Driver remote | 1W 350mA



CRI 80

White	<b>E96976</b>	2700 K	136 lm	<b>M</b>	Asymmetric	<b>07</b>
Grey	<b>E96978</b>	3000 K	145 lm	<b>W</b>		
BK Grey	<b>E80605</b>	4000 K	155 lm	<b>N</b>		
DarkBrown	<b>E96979</b>					

Power supply options (remote only)


<b>ECO30W- 350</b> 0-10V EldoLED ECOdrive 30W for 1-10 fixtures	<b>SOLO50W-350</b> 0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	<b>SOLO100W-350</b> 0-10V EldoLED SOLOdrive 100W for 1-40 fixtures
---	--	--

Recessed casing



**E84336 / E84915**

Envelope\_W Wall | Path-marker | 24 V | topLED | Wet location | Driver remote | 1W




CRI 80

White	<b>E97167</b>	2700 K	54 lm	<b>M</b>	Asymmetric	<b>07</b>
Grey	<b>E97169</b>	3000 K	54 lm	<b>W</b>		
BK Grey	<b>E81339</b>	4000 K	60 lm	<b>N</b>		
DarkBrown	<b>E81340</b>					

Power supply options (remote only)

<b>OT96-D010</b> Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	<b>OT96-JBX</b> Osram, Non-Dim, 96W, 24VDC, 120- 277VAC, Wet Location
--	---

Envelope\_W Recessed | Path-marker | 24 V | topLED | Wet location | Driver remote | 1W



CRI 80

White	<b>E97170</b>	3000 K	54 lm	<b>W</b>	Asymmetric	<b>07</b>
Grey	<b>E97172</b>	4000 K	60 lm	<b>N</b>		
BK Grey	<b>E81341</b>					
DarkBrown	<b>E81342</b>					

Power supply options (remote only)


<b>OT96-D010</b> Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	<b>OT96-JBX</b> Osram, Non-Dim, 96W, 24VDC, 120- 277VAC, Wet Location
--	---

Recessed casing



**E98111**

Envelope\_W Wall-Recessed | Path-marker | 24 V | topLED | Wet location | Driver remote | 7W



CRI 80

White	<b>E81343</b>	3000 K	619 lm	<b>W</b>	Asymmetric	<b>07</b>
Grey	<b>E81291</b>	4000 K	643 lm	<b>N</b>		
BK Grey	<b>E81290</b>					
DarkBrown	<b>E81292</b>					

Power supply options (remote only)


**OT96-D010**

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

**OT96-JBX**

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location


Recessed casing



**E99744**

Outer casing for brickwork-mounted installation

Envelope\_W Wall-Recessed | Path-marker | 24 V | topLED | Wet location | Driver remote



CRI 80 - 11W

White	<b>E81344</b>	3000 K	1032 lm	<b>W</b>	Asymmetric	<b>07</b>
Grey	<b>E81294</b>	4000 K	1073 lm	<b>N</b>		
BK Grey	<b>E81293</b>					
DarkBrown	<b>E81295</b>					

CRI 80 - 17W

White	<b>E81512</b>	3000 K	1600 lm	<b>W</b>	Asymmetric	<b>07</b>
Grey	<b>E81510</b>	4000 K	1684 lm	<b>N</b>		
BK Grey	<b>E81509</b>					
DarkBrown	<b>E81511</b>					

Power supply options (remote only)



**OT96-D010**

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure


**OT96-JBX**

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Solution with outer casing



Recessed casing



**E99745**

Outer casing for brickwork-mounted installation