


# intake

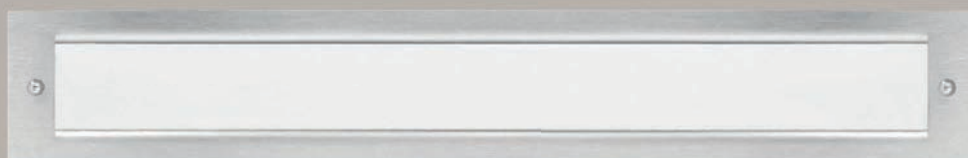



The Intake linear path marker is available with two optics, diffuse and asymmetric. The first highlights obstacles and illuminates specific areas, while the second brings out the depth of the walkable area or lighted object, and is perfect for footpaths, parking areas, and low walls.

## **Materials**

Aluminum body

AISI 316 stainless steel flange

**Intake\_L Double asymmetric | Path-marker | 120V | topLED | Wet location | Integral Driver | 6W**



CRI 80


Steel	<b>E97717</b>	3000 K	672 lm	<b>W</b>	General	<b>00</b>
		4000 K	714 lm	<b>N</b>		

Installation accessories



**E98496**  
Recessed casing  
L. 12.79 in

**Intake\_L Double asymmetric | Path-marker | 120V | topLED | Wet location | Integral Driver | 12W**



CRI 80



Steel	<b>E97718</b>	3000 K	1344 lm	<b>W</b>	General	<b>00</b>
		4000 K	1428 lm	<b>N</b>		

Installation accessories



**E98497**  
Recessed casing  
L. 24.09 in

**Intake\_L Asymmetric | Path-marker | 120V | topLED | Wet location | Integral Driver | 6W**



CRI 80


Steel	<b>E97714</b>	3000 K	672 lm	<b>W</b>	Asymmetric	<b>07</b>
		4000 K	714 lm	<b>N</b>		

Installation accessories



**E98496**  
Recessed casing  
L. 12.79 in

**Intake\_L Asymmetric | Path-marker | 120V | topLED | Wet location | Integral Driver | 12W**



CRI 80



Steel	<b>E97715</b>	3000 K	1344 lm	<b>W</b>	Asymmetric	<b>07</b>
		4000 K	1428 lm	<b>N</b>		

Installation accessories



**E98497**  
Recessed casing  
L. 24.09 in

**Intake\_L Double asymmetric | Path-marker | 24V | topLED | Wet location | Driver remote | 6W**



CRI 80

Steel	<b>E81967</b>	3000 K	672 lm	<b>W</b>	General	<b>00</b>
		4000 K	714 lm	<b>N</b>		

**Power supply options (remote only)**

**OT96-D010**

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

**OT96-JBX**


Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

**Installation accessories**



**E98496**  
Recessed casing  
L. 12.79 in

**Intake\_L Double asymmetric | Path-marker | 24V | topLED | Wet location | Driver remote | 12W**



CRI 80

Steel	<b>E81968</b>	3000 K	1344 lm	<b>W</b>	General	<b>00</b>
		4000 K	1428 lm	<b>N</b>		

**Power supply options (remote only)**

**OT96-D010**

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

**OT96-JBX**



Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

**Installation accessories**



**E98497**  
Recessed casing  
L. 24.09 in

**Intake\_L Asymmetric | Path-marker | 24V | topLED | Wet location | Driver remote | 6W**



CRI 80

Steel	<b>E81969</b>	3000 K	672 lm	<b>W</b>	Asymmetric	<b>07</b>
		4000 K	714 lm	<b>N</b>		

**Power supply options (remote only)**

**OT96-D010**

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

**OT96-JBX**


Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

**Installation accessories**



**E98496**  
Recessed casing  
L. 12.79 in

**Intake\_L Asymmetric | Path-marker | 24V | topLED | Wet location | Driver remote | 12W**



CRI 80

Steel	<b>E81970</b>	3000 K	1344 lm	<b>W</b>	Asymmetric	<b>07</b>
		4000 K	1428 lm	<b>N</b>		

**Power supply options (remote only)**

**OT96-D010**

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

**OT96-JBX**


Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

**Installation accessories**



**E98497**  
Recessed casing  
L. 24.09 in

**IntakePRO | Linear profiles | 24V | topLED | Wet location | Driver remote | 15W**



CRI 80

Steel	<b>E81971</b>	3000K	895 lm	<b>W</b>	Asymmetric	<b>07</b>
		4000K	937 lm	<b>N</b>		

**Installation accessories**



**98577**  
Recessed casing



**Power supply options (remote only)**

**OT96-D010**

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

**OT96-JBX**

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

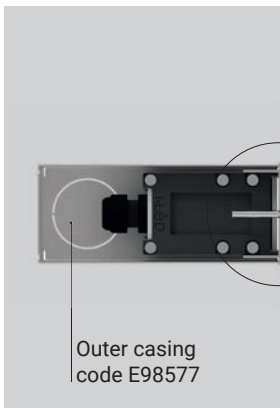

Outer casing code E98577

Asymmetrical Optics



Wall Installation