

tour



Essential and practical, Tour allows redefining the lighting of large spaces: whether transit areas, retail contexts or open spaces designated for co-working, the various versions of direct light, indirect light with internal lateral or ceiling-mounted recessed emission revolutionize an iconic shape with redesigned applications, refined finishes and new installation technologies.

Materials

Calendered aluminum body
Opaline polycarbonate diffuser




tour range



						
Profile	1.5" W x 1.5" H	1.5" W x 1.5" H	1.5" W x 3" H	1.5" W x 3" H	1.5" W x 1.5" H	1.5" W x 1.5" H
26.2 x 26.2 in	-	Q - QV 45 W	-	90 W	-	-
29.1 in	PD - PU 37.5 W	-	75 W	-	37.5 W	37.5 W
29.5 in	PI 29 W	-	-	-	-	-
35.8 in	PD - PU 45 W	-	90 W	-	-	-
37 in	-	-	-	-	45 W	-
37.2 in	PI 36.5 W	-	-	-	-	36.5 W
49.4 x 49.4 in		Q 90 W	-	180 W	-	-
56.3 in	PD 70 W	-	140 W	-	-	-
57.9 in	-	-	-	-	70 W	-
58.1 in	PI 57.5 W	-	-	-	-	57.5 W
65.2 x 49.4 in		Q 105 W	-	210 W	-	-
96.5 in	PD - PU 114 W	-	224 W	-	-	-
Finish						
CRI 92	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K
Emission						
Driver	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V

Application versatility

Tour's development process created the product as an application solution capable of adapting to any architectural need. In the suspension version, the support cables are the same that power-supply the product and they come 196.85 inch long on the four dimensions. Lastly, thanks to the ceiling-mounted version and recess, Tour becomes a dynamic element provided with a clean design without interfering with the style it is made of.

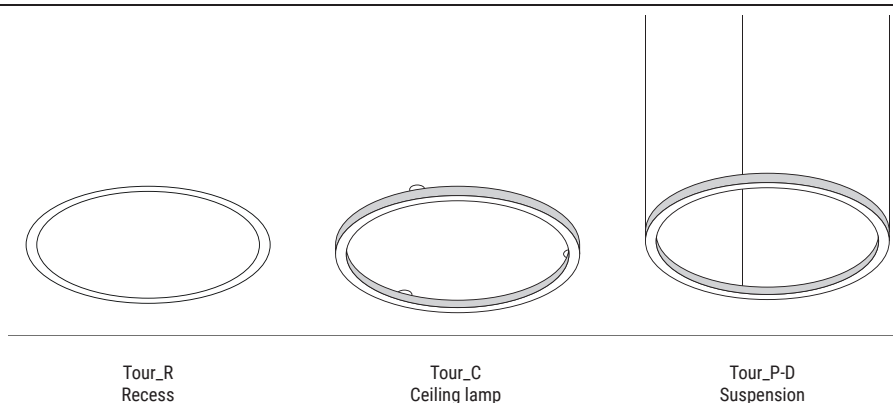


The ring

Tour comes with an extruded aluminum profile which places it in a class of its own due to its almost imperceptible size. Due to its prestigious six finishes, Tour becomes an all-around element suitable for any architectural solution.




Emissions range


Tour comes with four different emissions: direct, indirect, internal lateral and dual-side emission. Four lighting effects that can be combined with each other in countless combinations to transform the environments with a minimal and contemporary light.

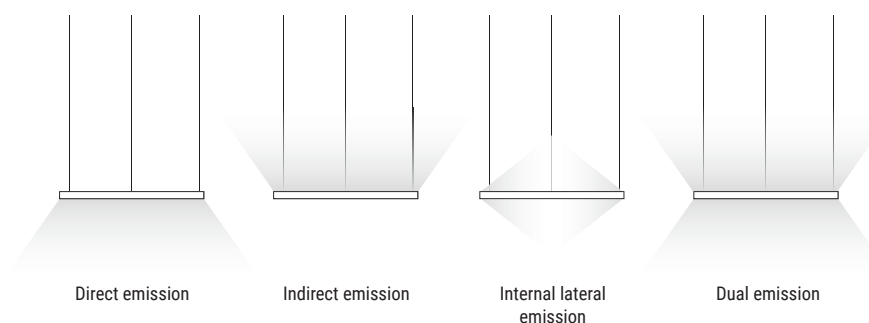

Harmonic diffusion

The opaline polycarbonate screen guarantees visual comfort and a perfect diffusion. Is easily removable thanks to a system equipped with a spring, patented and specially designed to perfectly adapt to the extruded element.

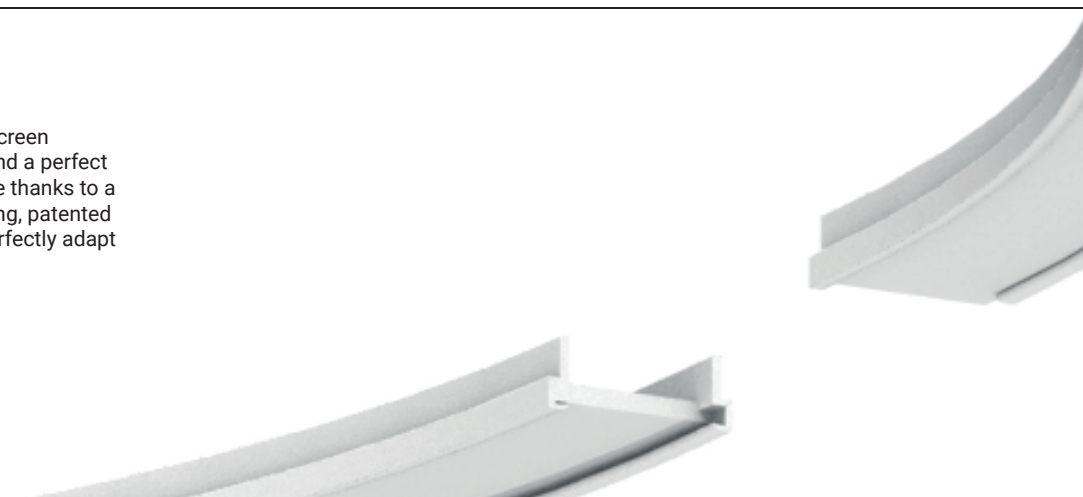

Tour_PD | Pendant Luminaires | 24 V | topLED | Driver remote | 37.5W



White	E64570	3000 K	4678 lm	W	General	00
Black	E65112	3500 K	4678 lm	T		
Nickel	E65113	4000 K	5006 lm	N		
Gold	E63726					
Bronze	E65115					
Rose gold	E65128					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PD | Pendant Luminaires | 24 V | topLED | Driver remote | 45W



White	E64571	3000 K	5847 lm	W	General	00
Black	E65116	3500 K	5847 lm	T		
Nickel	E65117	4000 K	6139 lm	N		
Gold	E63727					
Bronze	E65119					
Rose gold	E65129					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PD | Pendant Luminaires | 24 V | topLED | Driver remote | 70W



White	E64572	3000 K	9355 lm	W	General	00
Black	E65120	3500 K	9355 lm	T		
Nickel	E65121	4000 K	9823 lm	N		
Gold	E63728					
Bronze	E65123					
Rose gold	E65130					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PD | Pendant Luminaires | 24 V | topLED | Driver remote | 114W



White	E64573	3000 K	15588 lm	W	General	00
Black	E65124	3500 K	15588 lm	T		
Nickel	E65125	4000 K	16367 lm	N		
Gold	E63729					
Bronze	E65127					
Rose gold	E65131					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PI | Pendant Luminaires | 24 V | stripLED | Driver remote | 29W



White	E64577	3000 K	3000 lm	W	General	00
Black	E65100	3500 K	3000 lm	T		
Nickel	E65101	4000 K	3220 lm	N		
Gold	E63736					
Bronze	E65103					
Rose gold	E65132					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PI | Pendant Luminaires | 24 V | stripLED | Driver remote | 36.5W



White	E64579	3000 K	3785 lm	W	General	00
Black	E65104	3500 K	3785 lm	T		
Nickel	E65105	4000 K	4060 lm	N		
Gold	E63737					
Bronze	E65107					
Rose gold	E65133					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PI | Pendant Luminaires | 24 V | stripLED | Driver remote | 57.5W


White	E64581	3000 K	6000 lm	W	General	00
Black	E65108	3500 K	6000 lm	T		
Nickel	E65109	4000 K	6440 lm	N		
Gold	E63738					
Bronze	E65111					
Rose gold	E65134					


Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PU | Pendant Luminaires | 24 V | topLED | Driver remote | 37.5W



White	E64583	3000 K	4678 lm	W	General	00
Black	E64682	3500 K	4678 lm	T		
Nickel	E64683	4000 K	5006 lm	N		
Gold	E63731					
Bronze	E64685					
Rose gold	E65135					

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PU | Pendant Luminaires | 24 V | topLED | Driver remote | 45W



White	E64584	3000 K	5847 lm	W	General	00
Black	E64686	3500 K	5847 lm	T		
Nickel	E64687	4000 K	6139 lm	N		
Gold	E63732					
Bronze	E64689					
Rose gold	E65136					

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PU | Pendant Luminaires | 24 V | topLED | Driver remote | 70W



White	E64585	3000 K	9355 lm	W	General	00
Black	E64690	3500 K	9355 lm	T		
Nickel	E64691	4000 K	9823 lm	N		
Gold	E63733					
Bronze	E64693					
Rose gold	E65137					

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PU | Pendant Luminaires | 24 V | topLED | Driver remote | 114W



White	E64587	3000 K	15588 lm	W	General	00
Black	E64694	3500 K	15588 lm	T		
Nickel	E64695	4000 K	16367 lm	N		
Gold	E63734					
Bronze	E64697					
Rose gold	E65138					

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location



Tour_D | Pendant Luminaires | 24 V | topLED | Driver remote | 75W


Use a dual driver
for dual lighting


White	E65300	3000 K	9356 lm	W	General	00
Black	E65301	3500 K	9356 lm	T		
Nickel	E65302	4000 K	10012 lm	N		
Gold	E63711					
Bronze	E65304					
Rose gold	E65305					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Tour_D | Pendant Luminaires | 24 V | topLED | Driver remote | 90W


Use a dual driver
for dual lighting

White	E65306	3000 K	11894 lm	W	General	00
Black	E65307	3500 K	11894 lm	T		
Nickel	E65308	4000 K	12278 lm	N		
Gold	E63712					
Bronze	E65310					
Rose gold	E65311					



Requires 2 Drivers

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Tour_D | Pendant Luminaires | 24 V | topLED | Driver remote | 140W


Use a dual driver
for dual lighting

White	E65312	3000 K	18710 lm	W	General	00
Black	E65313	3500 K	18710 lm	T		
Nickel	E65314	4000 K	19646 lm	N		
Gold	E63713					
Bronze	E65316					
Rose gold	E65317					

Requires 2 Drivers


Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location



Tour_Q | Pendant Luminaires | 24 V | topLED | Driver remote | 45W



White	E64360	3000 K	4810 lm	W	General	00
Black	E64370	3500 K	4810 lm	T		
		4000 K	5040 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_Q | Pendant Luminaires | 24 V | topLED | Driver remote | 90W



White	E64361	3000 K	9619 lm	W	General	00
Black	E64371	3500 K	9619 lm	T		
		4000 K	10080 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_Q | Pendant Luminaires | 24 V | topLED | Driver remote | 105W



White	E64362	3000 K	11222 lm	W	General	00
Black	E64372	3500 K	11222 lm	T		
		4000 K	11760 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_QD | Pendant Luminaires | 24 V | topLED | Driver remote | 90W



White	E64363	3000 K	9619 lm	W	General	00
Black	E64373	3500 K	9619 lm	T		
		4000 K	10080 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_QD | Pendant Luminaires | 24 V | topLED | Driver remote | 180W




White	E64364	3000 K	18437 lm	W	General	00
Black	E64374	3500 K	18437 lm	T		
		4000 K	19320 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_QV | Pendant Luminaires | 24 V | topLED | Driver remote | 45W


White	E64260	3000 K	4810 lm	W	General	00
Black	E64250	3500 K	4810 lm	T		
		4000 K	5040 lm	N		

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure


OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Single lighting remote driver configuration

Providing a Tour_PD composition with remote driver.

Selection Tour model

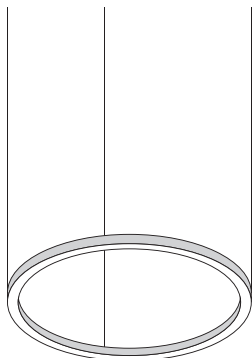

Ordering example:

n.1 art. E64570W00
(Tour_PD1)



Selection suspension kit



n.1 art. E64575
(Suspensions)

Selection driver / controller


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC,
120-277VAC, supplied in a Dry
location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-
277VAC, Wet Location


Final result

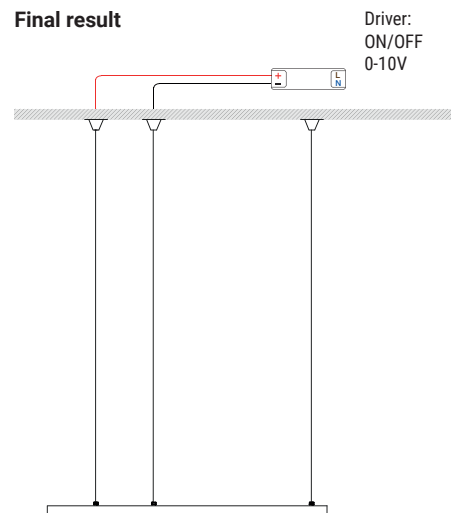

Dual lighting remote driver configuration

Providing a Tour_D composition with remote driver
which commands dual lighting.

Selection Tour model

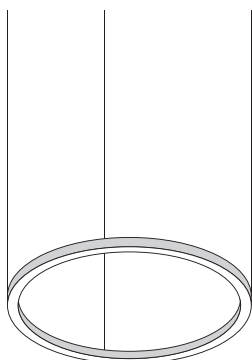

Ordering example:

n.1 art. E65312W00
(Tour_D3)



Selection suspension kit



n.1 art. E64575
(Suspensions)

Selection driver / controller


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC,
120-277VAC, supplied in a Dry
location enclosure


OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-
277VAC, Wet Location

Final result

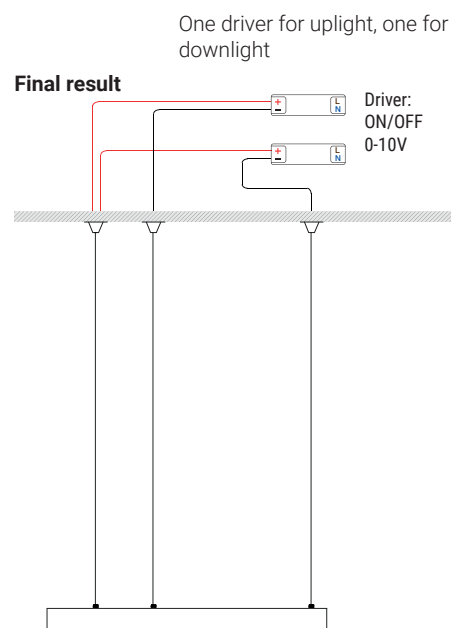

3-cone fixing kit Tour_R



For version Ø 96.46 requires 2x fixing
kit with 3 cones each

type

White E64575

Black E64670


Nickel E64671

Gold E63700

Bronze E64673

Rose gold E65141

3-cone fixing kit Tour_Q




type


White E64270

Black E64240


3-coupling point ceiling rose for one-side emission Tour R

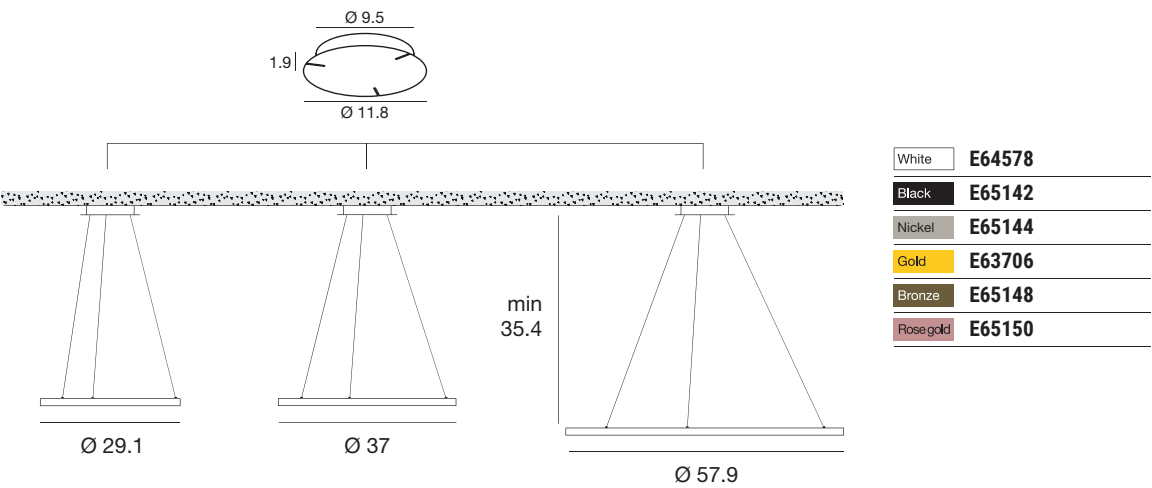

4-coupling point ceiling rose for one-side emission Tour Q

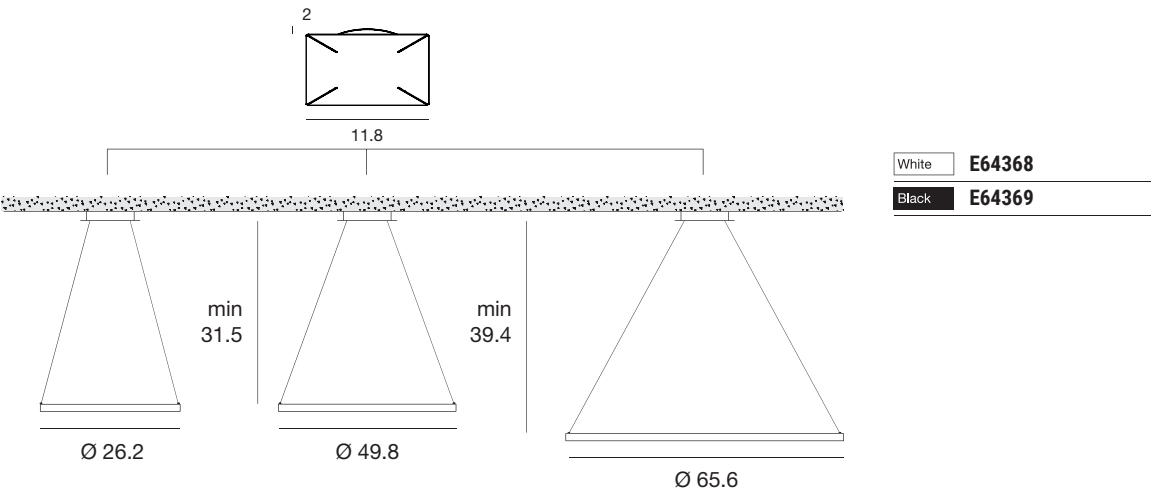


6-point coupling ceiling rose for 96.46 inch-long one-side emission Tour R

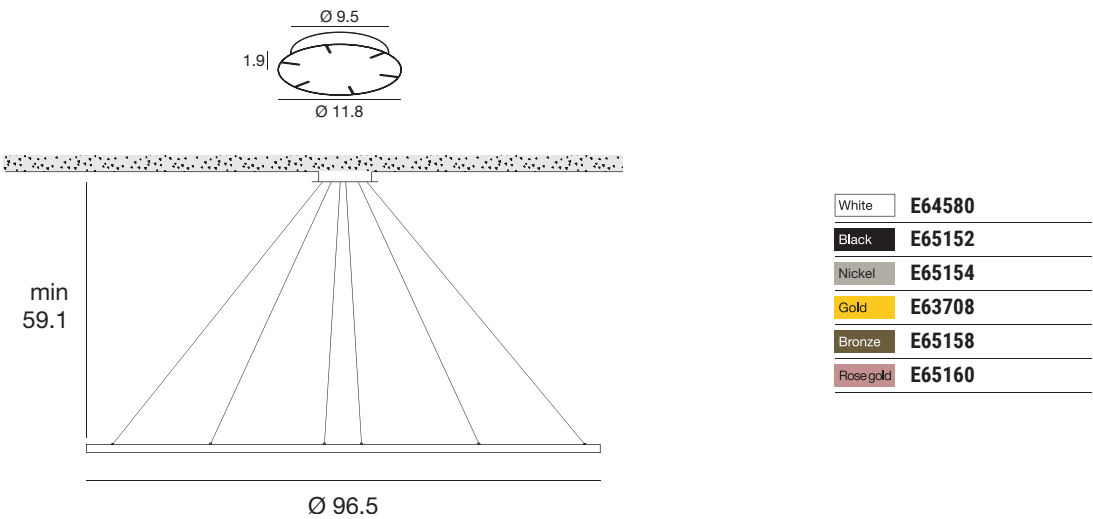


Configuration with 96.46 dual-side emission central ceiling rose

Providing a Tour_D composition with central ceiling rose.


Selection
Tour model



Selection of
central ceiling rose




Final result

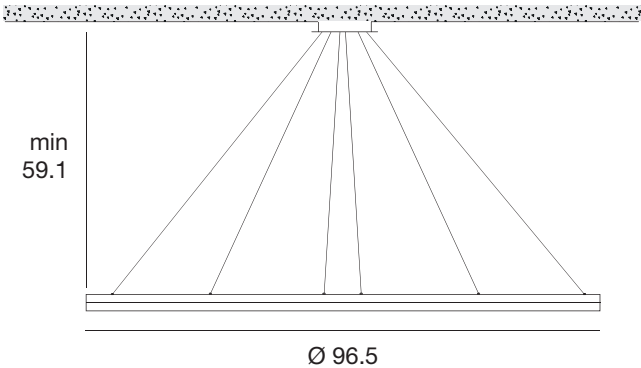


Ordering example:

n.1 art. E64570W00 (Tour_PD1) + n.1 art. E64578 (ON/OFF)

Coupling ceiling rose for dual-side emission Tour R

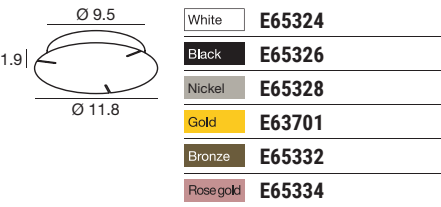


Coupling ceiling rose for dual-side emission Tour Q

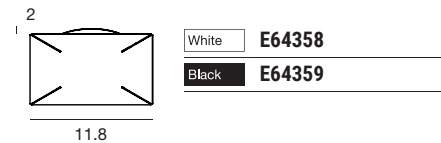


Configuration with central ceiling rose for compositions

Providing a Tour_PD, PU and D composition with central ceiling rose.


Selection
Tour model

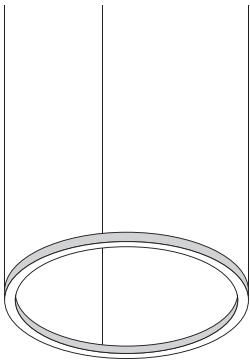

Selection of
central ceiling rose



Final result

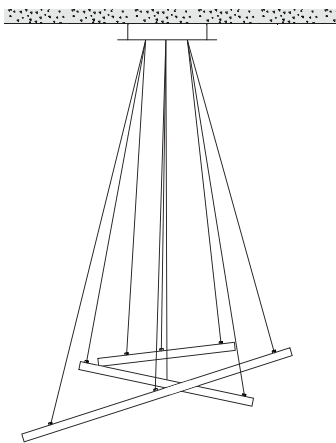



Ordering example:

n.1 art. E64570W00
n.1 art. E64584W00
n.1 art. E65312W00

+


n.1 art. E65412
(ON/OFF)

6-point ceiling rose for 3 tour fixing

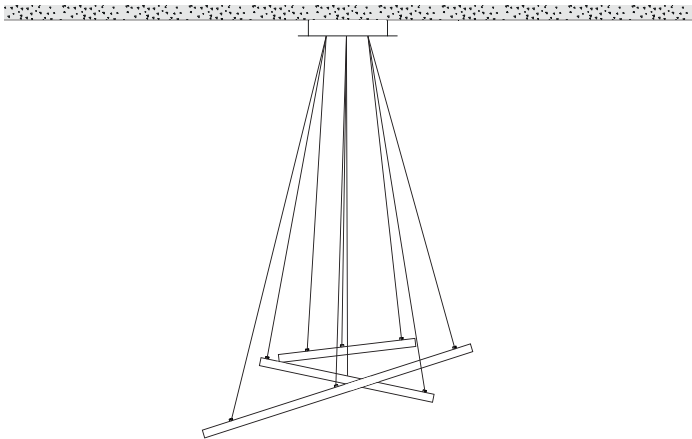

White	E65412
Black	E65413
Nickel	E65414
Gold	E63716
Bronze	E65416
Rose gold	E65417

Tour_R | Integrated Luminaires | 24 V | topLED | Driver remote | 37.5W



White	E65420	3000 K	4678 lm	W	General	00
Black	E65421	3500 K	4678 lm	T		
Nickel	E65422	4000 K	5006 lm	N		
Gold	E63710					
Bronze	E65424					
Rose gold	E65425					

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_R | Integrated Luminaires | 24 V | topLED | Driver remote | 45W



White	E65426	3000 K	5847 lm	W	General	00
Black	E65427	3500 K	5847 lm	T		
Nickel	E65428	4000 K	6139 lm	N		
Gold	E63720					
Bronze	E65430					
Rose gold	E65431					

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_R | Integrated Luminaires | 24 V | topLED | Driver remote | 70W



White	E65432	3000 K	9355 lm	W	General	00
Black	E65433	3500 K	9355 lm	T		
Nickel	E65434	4000 K	9823 lm	N		
Gold	E63730					
Bronze	E65436					
Rose gold	E65437					

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Removal steps of the EPS element

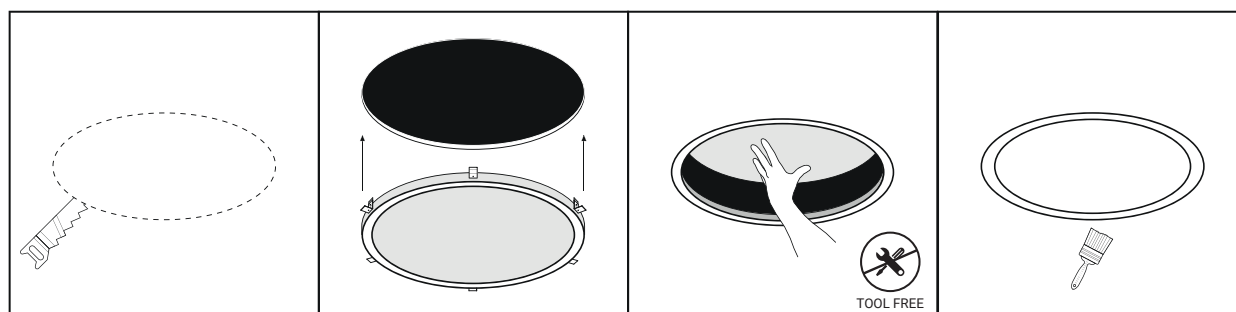

Dropped ceiling section

Product insertion

Removing cap

Painting and positioning the cap



Tour_CD | Ceiling Light | 24 V | topLED | Driver remote | 37.5W



White	E65350	3000 K	4678 lm	W	General	00
Black	E65351	3500 K	4678 lm	T		
Nickel	E65352	4000 K	5006 lm	N		
Gold	E63740					
Bronze	E65354					
Rose gold	E65355					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_CD | Ceiling Light | 24 V | topLED | Driver remote | 45W



White	E65356	3000 K	5847 lm	W	General	00
Black	E65357	3500 K	5847 lm	T		
Nickel	E65358	4000 K	6139 lm	N		
Gold	E63750					
Bronze	E65360					
Rose gold	E65361					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_CD | Ceiling Light | 24 V | topLED | Driver remote | 70W





White	E65362	3000 K	9355 lm	W	General	00
Black	E65363	3500 K	9355 lm	T		
Nickel	E65364	4000 K	9823 lm	N		
Gold	E63760					
Bronze	E65366					
Rose gold	E65367					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Spacer kit for Tour_C


White	E65386
Black	E65387
Nickel	E65389
Gold	E63724
Bronze	E65390
Rose gold	E65391

The Tour_C version comes with 0.9 inch-long spacers included.

Tour_CI | Ceiling_Wall Light | 24 V | stripLED | Driver remote | 29W

2.4H x 1.5W

Ø 29.5



White	E65368	3000 K	3000 lm	W
Black	E65369	3500 K	3000 lm	T
Nickel	E65370	4000 K	3220 lm	N
Gold	E63721			
Bronze	E65372			
Rose gold	E65373			

General **00****Power supply options (remote only)****OT96-D010**

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Tour_CI | Ceiling_Wall Light | 24 V | stripLED | Driver remote | 36.5W

2.4H x 1.5W

Ø 37.2



White	E65374	3000 K	3785 lm	W
Black	E65375	3500 K	3785 lm	T
Nickel	E65376	4000 K	4060 lm	N
Gold	E63722			
Bronze	E65378			
Rose gold	E65379			

General **00****Power supply options (remote only)****OT96-D010**

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Tour_CI | Ceiling_Wall Light | 24 V | stripLED | Driver remote | 57.5W

2.4H x 1.5W

Ø 58.1





White	E65380	3000 K	6000 lm	W
Black	E65381	3500 K	6000 lm	T
Nickel	E65382	4000 K	6440 lm	N
Gold	E63723			
Bronze	E65384			
Rose gold	E65385			

General **00****Power supply options (remote only)****OT96-D010**

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied in
a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC,
120-277VAC, Wet Location

Spacer kit for Tour_C


White	E65386
Black	E65387
Nickel	E65389
Gold	E63724
Bronze	E65390
Rose gold	E65391

The Tour_C version
comes with 0.9 inch-long
spacers included.


Configuration of Tour_C with spacer kit

Providing an ON/OFF composition. Tour_CI, CD with spacer kit. Tour_C is distributed including 0.9 inch spacers which can be possibly replaced by the suspension kit to extend the distance from the ceiling.

Selection
Tour model




Selection
suspension kit



Selection
driver / controller

- OT96-D010**
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure
- OT96-JBX**
Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Final result

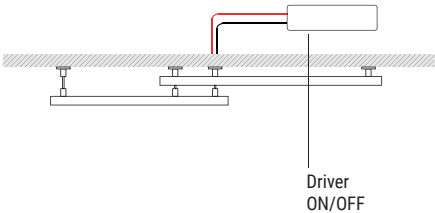


Ordering example:

n.1 art. E65368W00 + n.1 art. E65386 (spacer kit) + n.1 art. E99374 (driver ON/OFF)

Recess Tour configuration

Providing an ON/OFF configuration with Tour_R.


Selection
Tour model



Selection
driver / controller

- OT96-D010**
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure
- OT96-JBX**
Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Final result

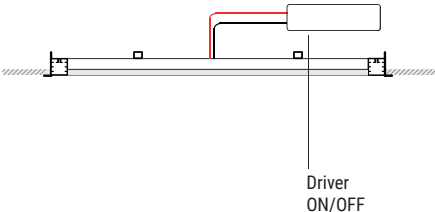

Ordering example:

n.1 art. E65420W00 + n.1 art. E99374 (driver ON/OFF)

