


tour range



						
Profile	1.5" W x 1.5" H	1.5" W x 1.5" H	1.5" W x 3" H	1.5" W x 3" H	1.5" W x 1.5" H	1.5" W x 1.5" H
26.2 x 26.2 in	-	Q - QV 45 W	-	90 W	-	-
29.1 in	PD - PU 37.5 W	-	75 W	-	37.5 W	37.5 W
29.5 in	PI 29 W	-	-	-	-	-
35.8 in	PD - PU 45 W	-	90 W	-	-	-
37 in	-	-	-	-	45 W	-
37.2 in	PI 36.5 W	-	-	-	-	36.5 W
49.4 x 49.4 in		Q 90 W	-	180 W	-	-
56.3 in	PD 70 W	-	140 W	-	-	-
57.9 in	-	-	-	-	70 W	-
58.1 in	PI 57.5 W	-	-	-	-	57.5 W
65.2 x 49.4 in		Q 105 W	-	210 W	-	-
96.5 in	PD - PU 114 W	-	224 W	-	-	-
Finish						
CRI 92	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K	3000K 3500K 4000K
Emission						
Driver	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V	On/Off 0-10 V

Application versatility

Tour's development process created the product as an application solution capable of adapting to any architectural need. In the suspension version, the support cables are the same that power-supply the product and they come 196.85 inch long on the four dimensions. Lastly, thanks to the ceiling-mounted version and recess, Tour becomes a dynamic element provided with a clean design without interfering with the style it is made of.

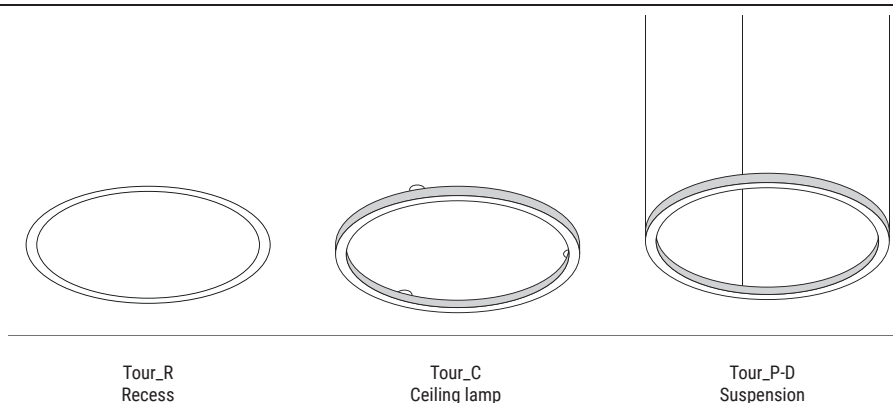


The ring

Tour comes with an extruded aluminum profile which places it in a class of its own due to its almost imperceptible size. Due to its prestigious six finishes, Tour becomes an all-around element suitable for any architectural solution.




Emissions range


Tour comes with four different emissions: direct, indirect, internal lateral and dual-side emission. Four lighting effects that can be combined with each other in countless combinations to transform the environments with a minimal and contemporary light.

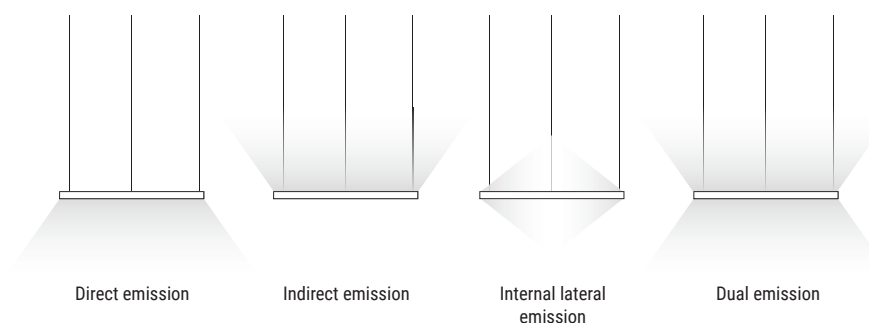

Harmonic diffusion

The opaline polycarbonate screen guarantees visual comfort and a perfect diffusion. Is easily removable thanks to a system equipped with a spring, patented and specially designed to perfectly adapt to the extruded element.

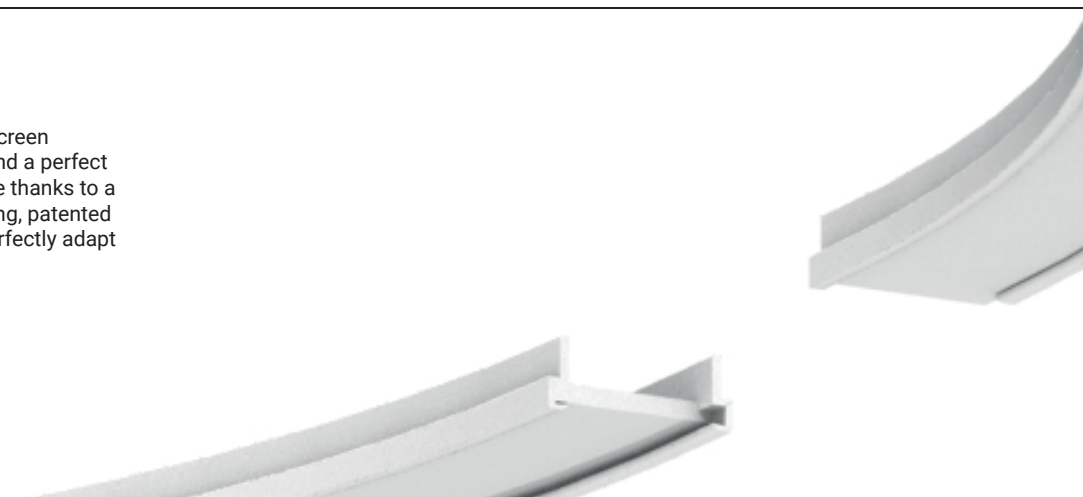

Tour_PD | Pendant Luminaires | 24 V | topLED | Driver remote | 37.5W



White	E64570	3000 K	4678 lm	W	General	00
Black	E65112	3500 K	4678 lm	T		
Nickel	E65113	4000 K	5006 lm	N		
Gold	E63726					
Bronze	E65115					
Rose gold	E65128					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location


Tour_PD | Pendant Luminaires | 24 V | topLED | Driver remote | 45W



White	E64571	3000 K	5847 lm	W	General	00
Black	E65116	3500 K	5847 lm	T		
Nickel	E65117	4000 K	6139 lm	N		
Gold	E63727					
Bronze	E65119					
Rose gold	E65129					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location


Tour_PD | Pendant Luminaires | 24 V | topLED | Driver remote | 70W



White	E64572	3000 K	9355 lm	W	General	00
Black	E65120	3500 K	9355 lm	T		
Nickel	E65121	4000 K	9823 lm	N		
Gold	E63728					
Bronze	E65123					
Rose gold	E65130					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location


Tour_PD | Pendant Luminaires | 24 V | topLED | Driver remote | 114W


White	E64573	3000 K	15588 lm	W	General	00
Black	E65124	3500 K	15588 lm	T		
Nickel	E65125	4000 K	16367 lm	N		
Gold	E63729					
Bronze	E65127					
Rose gold	E65131					


Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location



Tour_PI | Pendant Luminaires | 24 V | stripLED | Driver remote | 29W



White	E64577	3000 K	3000 lm	W	General	00
Black	E65100	3500 K	3000 lm	T		
Nickel	E65101	4000 K	3220 lm	N		
Gold	E63736					
Bronze	E65103					
Rose gold	E65132					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location


Tour_PI | Pendant Luminaires | 24 V | stripLED | Driver remote | 36.5W



White	E64579	3000 K	3785 lm	W	General	00
Black	E65104	3500 K	3785 lm	T		
Nickel	E65105	4000 K	4060 lm	N		
Gold	E63737					
Bronze	E65107					
Rose gold	E65133					

Power supply options (remote only)
OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location


Tour_PI | Pendant Luminaires | 24 V | stripLED | Driver remote | 57.5W


White	E64581	3000 K	6000 lm	W	General	00
Black	E65108	3500 K	6000 lm	T		
Nickel	E65109	4000 K	6440 lm	N		
Gold	E63738					
Bronze	E65111					
Rose gold	E65134					

Power supply options (remote only)
OT96-D010


Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location



Tour_PU | Pendant Luminaires | 24 V | topLED | Driver remote | 37.5W



White	E64583	3000 K	4678 lm	W	General	00
Black	E64682	3500 K	4678 lm	T		
Nickel	E64683	4000 K	5006 lm	N		
Gold	E63731					
Bronze	E64685					
Rose gold	E65135					

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PU | Pendant Luminaires | 24 V | topLED | Driver remote | 45W



White	E64584	3000 K	5847 lm	W	General	00
Black	E64686	3500 K	5847 lm	T		
Nickel	E64687	4000 K	6139 lm	N		
Gold	E63732					
Bronze	E64689					
Rose gold	E65136					

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PU | Pendant Luminaires | 24 V | topLED | Driver remote | 70W



White	E64585	3000 K	9355 lm	W	General	00
Black	E64690	3500 K	9355 lm	T		
Nickel	E64691	4000 K	9823 lm	N		
Gold	E63733					
Bronze	E64693					
Rose gold	E65137					

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location

Tour_PU | Pendant Luminaires | 24 V | topLED | Driver remote | 114W



White	E64587	3000 K	15588 lm	W	General	00
Black	E64694	3500 K	15588 lm	T		
Nickel	E64695	4000 K	16367 lm	N		
Gold	E63734					
Bronze	E64697					
Rose gold	E65138					

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-Dim, 96W, 24VDC, 120-277VAC, Wet Location