


**WG-ZC-...-SDC-W**  
Delivered Lumens Per Foot

	Power							
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] <sup>2</sup>	H [8.0 W/ft]
<b>CCT</b>								
927	179	346	650	1000	1473	-	-	-
930	187	360	677	1041	1534	-	-	-
935	194	373	702	1079	1606	-	-	-
940	195	383	720	1108	1650	-	-	-
TW <sup>1</sup>	104	188	337	511	726	-	-	-
WD <sup>1</sup>	-	-	-	-	-	150	312	451
RGBW <sup>2</sup>	-	-	-	-	-	-	255	-
UGR <sup>3</sup>	28.2	30.5	32.8	34.2	35.6	-	-	-



Beam Angle (0-180) = 58.6  
Beam Angle (90-270) = 83.5

	Power Multiplier							
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] <sup>2</sup>	H [8.0 W/ft]
9XX	0.12	0.23	0.44	0.67	1.00	-	-	-
TW	0.06	0.12	0.21	0.32	-	-	-	-
WD	-	-	-	-	-	0.09	0.19	0.28
RGBW	-	-	-	-	-	-	0.16	-




CCT Multiplier			
927	930	935	940
0.92	0.95	1.00	1.03

- 1 TW lumen data at maximum output (4000K). WD lumen data at maximum output (3000K).
- 2 RGBW lumen data at maximum output with 3000K White LED. M-RGBW power level wattage is 7.6W/ft.
- 3 UGR value noted is the maximum UGR (crosswise) with 930 LEDs at noted Power level.
- 4 Polar Plot and Isofootcandle diagram are applicable to part number noted; use Multiplier table(s) to approximate other Power / CCT options.

# Z Cove Isoillumiance

**WG-ZC-...-S-...-P2-935-SDC-W**  
**10'-0" ceiling height**  
 Satin clear diffuse

**WG-ZC-...-S-...-P4-935-SDC-W**  
**20'-0" ceiling height**  
 Satin clear diffuse

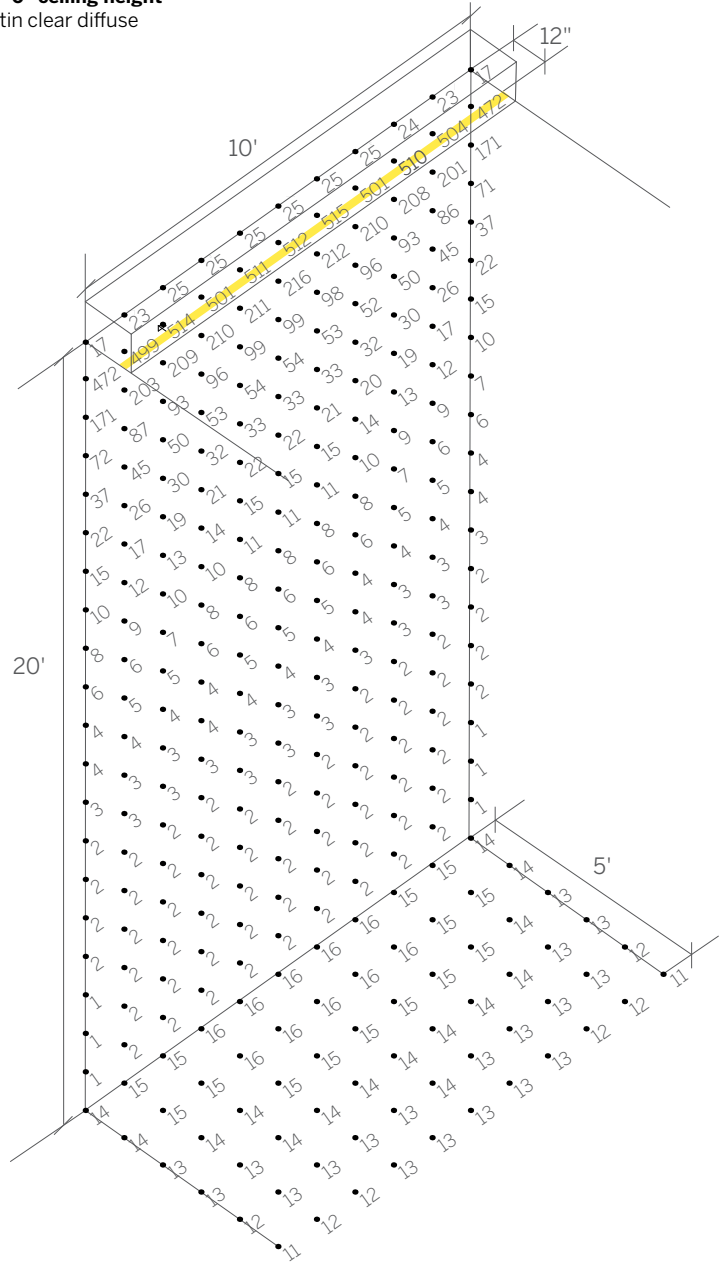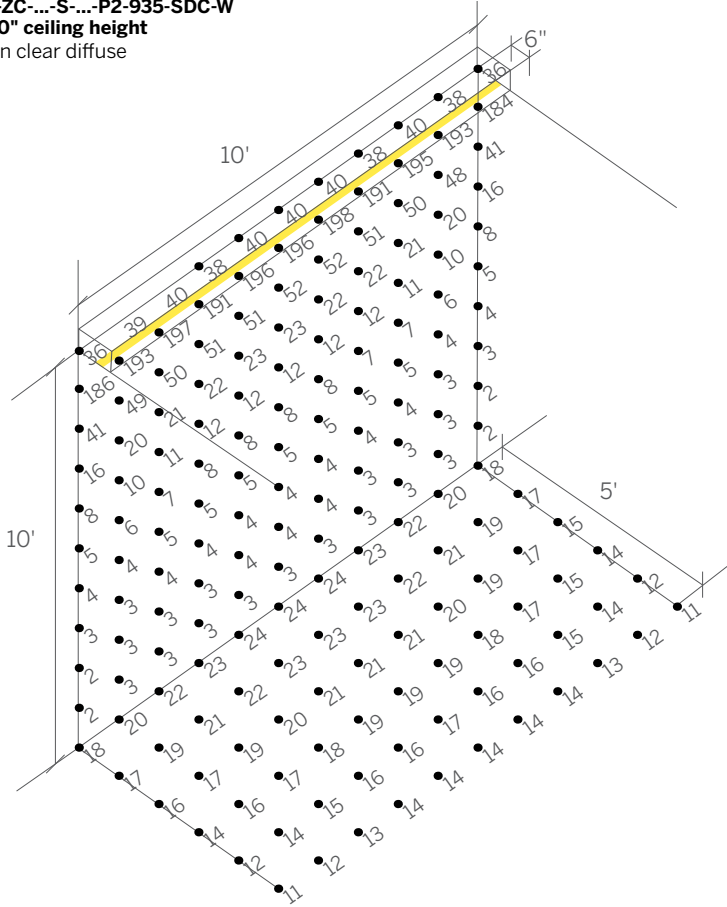

Surface reflectances:

80% Ceiling

50% Wall

20% Floor

Illuminance points are spaced 1'-0" on center.

Illuminance values are shown in units of foot-candles.