





A knife edge perimeter slot system for continuous illumination of vertical surfaces available in any dimension to fully integrate with the architecture.

- Continuous perimeter cove with precision knife edge delivers wash of directed light to adjacent surface.
- Suitable for 1/2" or 5/8" drywall ceiling.
- Light source positioned for optimum vertical spread of illumination.
- Extruded aluminum housing, easily installed internal LED tray assembly with integral driver. Field replaceable LED boards.
- Efficacy up to 125 lumens per watt (delivered) @ 3000K, see photometry page for details.
- 90+ CRI, 3 Step MacAdam (Static White).
- L70 (TM21 Projected 85°C) Static White / Tunable White / RGBW 50,000 hours. Warm Dim 36,000 hours.
- ETL and ETL-C for dry and damp locations.
- Satin clear diffuser for high efficiency and soft edge beam without striations.
- Optional adjustable in-fill panels to accommodate 4" to 6" slot.
- Lengths and angles factory cut to exact field dimensions. Standard and custom corners.
- Powdercoat painted.

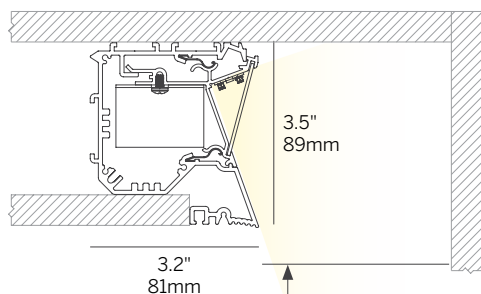


Plaster Trim (RPT)


4" minimum for accessibility,
6" for even illumination and
downward throw

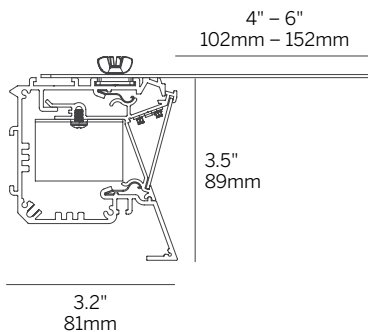


Bezel Trim (RBT)
with optional in-fill panel

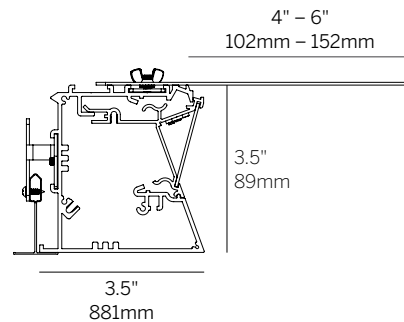

Grid Trim (RGT)



Inside Corner (PI)



Outside Corner (PO)



Quick Ship Available

Ordering Information										
WG-ZC								SDC		
Model	Fixation	Pattern	Length	Power ³	CRI/CCT ⁴	Driver ⁵	In-fill	Lens	Finish	Options
WG-ZC	RPT RBT RGT	S ¹ PI ² PO ² PZ ²	A A x B A x B x C A x B x A x B	P0 P1 P2 P3 P4	927 930 935 940 TW1840 TW2765	E1 L1 D2DT6 D2DT8	X P4 P5 PX	SDC (std)	W (std) F	AWNRF BT EM
				L M H	WD RGBW	D010 DPH L3DAE L3DOE				

Model

- WG-ZC = Z Cove

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim
- RGT = Recessed Grid Trim

Pattern

- S = Straight run¹
- PI = Standard patterns 2, 3, or 4 sided with 90° inside corners on the same plane²
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane²
- PZ = Non-standard patterns and/or corners other than 90°, consult factory²

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25")
For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48";
3 sided: A x B x C; 4 sided: A x B x A x B)

Power³

- P0 = 1.5 W/ft
- P1 = 3 W/ft
- P2 = 6 W/ft
- P3 = 10 W/ft
- P4 = 15 W/ft
- L = 2.7 W/ft WD low power (24V)
- M = 5.5 W/ft WD medium power (24V) [RGBW 7.6 W/ft]
- H = 8 W/ft WD high power (24V)

CRI / CCT (90+ CRI minimum)⁴

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW1840 = Tunable white 1800K - 4000K
- TW2765 = Tunable white 2700K - 6500K
- WD = Warm Dim 1800K - 3000K
- RGBW = 3000K White

Driver (integral)⁵

- E1 = eldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, EcoSystem (120-277V)
- D2DT6 = DALI-2 (DT6), 0.1% dimming (120-277V)
- D2DT8 = DALI-2 (DT8), 0.1% dimming (120-277V) [TW only]
- D010 = eldoLED 10%, 0-10V dimming, 120-277V [WD only]
- DPH = Phase Dimming, 1% dimming, 120V only (remote) [WD only]
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V [WD only]
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (remote) [WD only]
- EL96 = eldoLED 0-10V, 0.1% dimming (120-277V) [WD only]
- DALI = eldoLED DALI (DT6), 0.1% dimming (120-277V) [WD only]
- DMX = eldoLED 24V, DMX dimming [WD + RGBW Only]

In-fill

- X = No in-fill panel
- P4 = 4" - 5" adjustable in-fill panel
- P5 = 5" - 6" adjustable in-fill panel
- PX = Custom in-fill panel (contact factory)

Lens

- SDC = Satin clear diffuser (standard)

Finish

- W = White, 15% gloss, RAL 9010 (standard)
- F = Custom finish, specify RAL

Options


- AWNRF = Lutron Athena Wireless Node RF (specify with E1, D2DT6, D2DT8, EL96 or DALI)
- BT = Wireless CAS – Casambi (remote only, specify with E1, D2DT6, D2DT8, D010, EL96, DALI or DMX)
- EM = Emergency LED driver (remote)

- Standard setup assumes the cove ends at a perpendicular wall and the LED board is setback from the end to minimize light on the perpendicular wall. Contact us for options.
- See pattern specs sheet.
- Wattage shown does not include power supplies/drivers.
- See photometric data sheet for delivered lumens.
- See power supply page for details.

WG-ZC-...-SDC-W¹

Delivered Lumens Per Foot

	Power							
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] ³	H [8.0 W/ft]
CCT								
927	179	346	650	1000	1473	-	-	-
930	187	360	677	1041	1534	-	-	-
935	194	373	702	1079	1606	-	-	-
940	195	383	720	1108	1650	-	-	-
TW ²	104	188	337	511	726	-	-	-
WD ²	-	-	-	-	-	150	312	451
RGBW ³	-	-	-	-	-	-	255	-



Beam Angle (0-180) = 58.6

Beam Angle (90-270) = 83.5

- 1 Polar Plot and Isofootcandle diagram are applicable to part number noted; approximate other Power / CCT options.
- 2 TW lumen data at maximum output (4000K). WD lumen data at maximum output (3000K).
- 3 RGBW lumen data at maximum output with 3000K White LED. M-RGBW power level wattage is 7.6W/ft.


	Power Multiplier							
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] ³	H [8.0 W/ft]
9XX	0.12	0.23	0.44	0.67	1.00	-	-	-
TW	0.06	0.12	0.21	0.32	-	-	-	-
WD	-	-	-	-	-	0.09	0.19	0.28
RGBW	-	-	-	-	-	-	0.16	-

CCT Multiplier			
927	930	935	940
0.92	0.95	1.00	1.03

WG-ZC-...-S-...-P2-935-SDC-W

10'-0" ceiling height

Satin clear diffuser

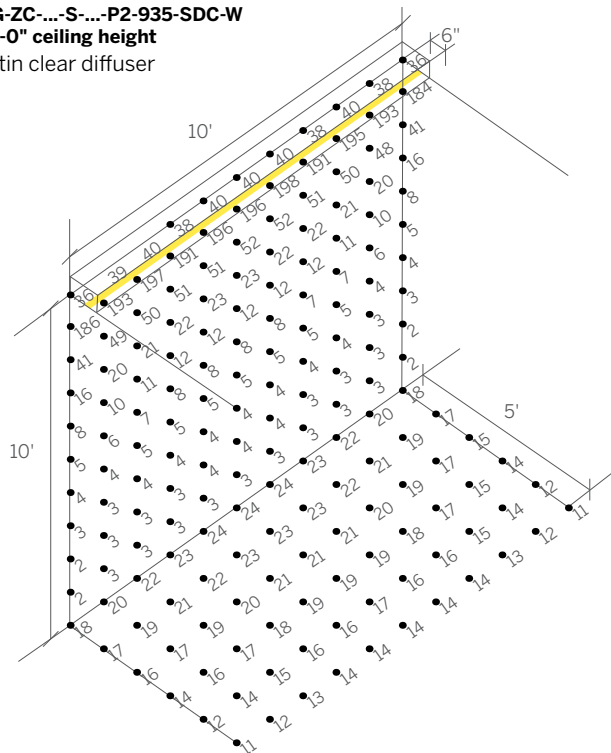

Surface reflectances:

80% Ceiling

50% Wall

20% Floor

Illuminance points are spaced 1'-0" on center.

Illuminance values are shown in units of foot-candles.

WG-ZC-...-S-...-P4-935-SDC-W

20'-0" ceiling height

Satin clear diffuser

