



# 20 Linear Ceiling Wash Semi-Recessed Bezel Trim



Ordering Information								
Model	Fixation	Pattern	Length	Power <sup>1</sup>	CRI/CCT <sup>2</sup>	Driver <sup>3</sup>	Lens	Finish
WG-20LCW	SRBT	S	A	L M H	927 930 935 940	X S D010 L3DAE L3D0E DFPN EL96	OD (std) SD	W (std) B S F



Semi Recessed Bezel Trim (SRBT)

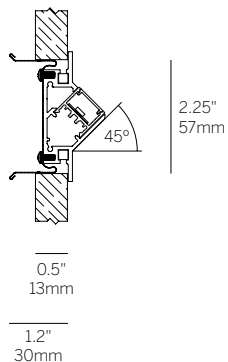

Solid Wall

### Luminaire

- Continuous, evenly illuminated snap-in lens without visible LED pattern.
- Standard Opal Diffuser for even illumination and no LED appearance. Satin Diffuser for high efficiency and minimal LED appearance.
- Field replaceable LED boards.
- 90+ CRI, 3 steps MacAdam.
- Lengths factory cut to exact field dimensions.
- Powder coat painted white - RAL 9010.
- Supplied with 4' class 2 plenum rated feed cable per fixture lengths.

### Fixation

- SRBT = Semi Recessed Bezel Trim

### Pattern

- S = Straight run

### Length

- A = specify inches to the nearest 0.25" (i.e. 72.25")

### Power<sup>1</sup>

- L = 3W/ft low power (24V)
- M = 6W/ft mid power (24V)
- H = 10W/ft high power (24V)

### CRI/CCT<sup>2</sup>

90+ CRI minimum (Low/Mid/High Power)

- 927 = 2700K (175/351/614 lm/ft)
- 930 = 3000K (191/382/668 lm/ft)
- 935 = 3500K (226/453/793 lm/ft)
- 940 = 4000K (269/538/943 lm/ft)

### Driver (remote)<sup>4</sup>

- X = No driver, ordered separately
- S = Standard driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3D0E = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC
- EL96 = Osram / EdoLED, 24V, 1% 0-10V Dimming (1"x3"x23" driver enclosure)

### Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser (high efficiency)

### Finish

- W = White, 15% gloss, RAL9010 (standard)
- B = Black, 15% gloss, Tiger Drylac 44/90053
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

### Emergency (remote only)

- Emergency LED driver available, order separately

1 Wattage shown does not include power supplies/drivers.

2 Delivered lumens with satin opal diffuser shown.

3 Remote power supply required. See power supply page for details.