



20 Linear Wash Light Surface

- Miniature Surface Mount Wash Light for even illumination of walls, ceilings and floors.
- Mounts via invisible clip to any surface or toolless mounting to grid ceilings
- Straight runs and configurations with factory corners in exact lengths as specified.
- 90+ CRI, 3 Steps MacAdam delivering excellent color rendering.
- Choice of White, RGBW and Warm Dim to emulate incandescent.
- Identical LED technology used throughout all Whitegoods Linears, Coves and Perimeter products deliver consistent quality and performance throughout a project.
- Made in USA.
- 5-year warranty.



Surface Mount (SM)

| | |
|-----------------------|---|
| Housing | Precision extruded aluminum for true dimensions and tolerances All low voltage connections are made in the housing Luminaire snaps into the housing without tools Finishes: white, black, silver and custom |
| Integration | Fixation onto any surface using standard clips |
| Distribution | Even wash of light |
| LED | Constant Voltage, 90+ CRI, 3 Steps MacAdam 120 nominal lumens/watt average (see spec sheet for delivered lumens) Conformal coated for protection against humidity optional (-WL) Warm Dim to emulate incandescent when dimming; 75 nominal lumens per watt average RGBW for color changing applications; 50 nominal lumens per watt average L70 (TM21 Projected 85C) Static White = 60,000 hours RGBW = 50,000 hours, WD = 36,000 hours |
| Lens | OD - Opal Diffuser provides even, continuous line of light and general illumination SD - Satin Clear Diffuser provides high efficiency soft edge beam, general illumination MPL - Micro-prismatic lens provides lower brightness, general illumination |
| Driver | Compatible with quality constant voltage drivers |
| Weight | 1lbs per foot |
| Operating Temp | Suitable for operation in maximum ambient temperature of 35C (95F) |
| Warranty | 5-year Limited (see complete company warranty information) |
| Certifications | ETL and ETL-C for dry and damp location, CE |
| Voltages | 24V Fixture / 120-277VAC Driver (remote) |

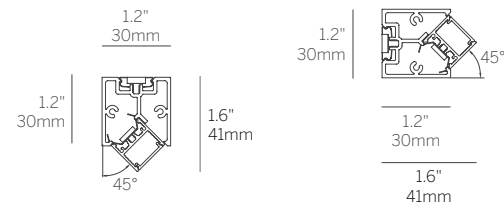

Lenses/Accessories



Opal Diffuser (OD)
Satin Diffuser (SD)
Micro-prismatic Lens (MPL)

20 Linear Wash Light Surface

| Model | Fixation | Pattern | Length | Power ² | CRI/CCT ³ | Driver ⁴ | Lens | Finish ⁵ | Options |
|-------------|-------------------|---|--|--------------------|--|---|-----------------------|------------------------|-----------------------|
| WG-20LWW-SM | SC GT9 GT15 | S PI ¹ PO ¹ | A A x B A x B x C A x B x A x B | L M H | 927 930 935 940 WD RGBW | X S D010 L3DAE L3DOE DFPN EL96 DMX | OD (std) SD MPL | W (std) B S F | EM WL ⁶ |

Model

- WG-20LWW-SM = 20 Linear Wash Light Surface

Fixation

- SC = Screw clip
- GT9 = 9/16" T-bar grid clip
- GT15 = 15/16" T-bar grid clip

Pattern

- S = Straight run
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane³
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane³

Length

- A, B, C = specify inches to the nearest 0.25" (i.e. 72.25")
For patterns specify each length (i.e. 2 sided: A x B = 72.25" x 48"; 3 sided: A x B x C; 4 sided: A x B x A x B)
- For 2 and 4 foot fixtures to fit ceiling grids specify 24" and 48" lengths

Power²

- L = 3W/ft low power (WD 2.7 W/ft) (24V)
- M = 6W/ft mid power (WD 5.5 W/ft) (24V) (RGBW - 7.6 W/ft)
- H = 10W/ft high power (WD 8 W/ft) (24V)

CRI/CCT (90+ CRI)³

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- WD = Warm Dimming 1800 - 3000K
- RGBW = 3000K White (M power only)

Driver (remote)⁴

- X = No driver, ordered separately
- S = Standard, non-dim driver 120-277V
- D010 = Osram, 10%, 0-10V dimming, 120-277V
- L3DAE = Lutron Hi-lume 1% EcoSystem, 120-277V
- L3DOE = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC
- EL96 = Osram / EldoLED, 24V, 0.1% 0-10V Dimming
- DMX = Osram / EldoLED, 24V, 0.1% DMX Dimming

Lens

- OD = Satin opal diffuser (standard)
- SD = Satin clear diffuser
- MPL = Micro-prismatic lens

Finish⁵

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, Tiger Drylac 44/90053
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

Options

- EM = Emergency (remote)
- WL = Wet Location Under Canopy / Cover⁶

Whitegoods reserves the right to change any information without prior notice.

Notes

- 1 See pattern spec sheet.
- 2 Wattage shown is for LED boards only, system wattage varies depending on driver selected.
- 3 See spec page for delivered lumens.
- 4 Remote power supply required. See power supply page for details.
- 5 See Tiger Drylac color chart: inter-lux.com/tiger
- 6 Wet Location option available for OD / SD / MPL lenses and recessed / surface ceiling applications only.