





# Exterior linear range

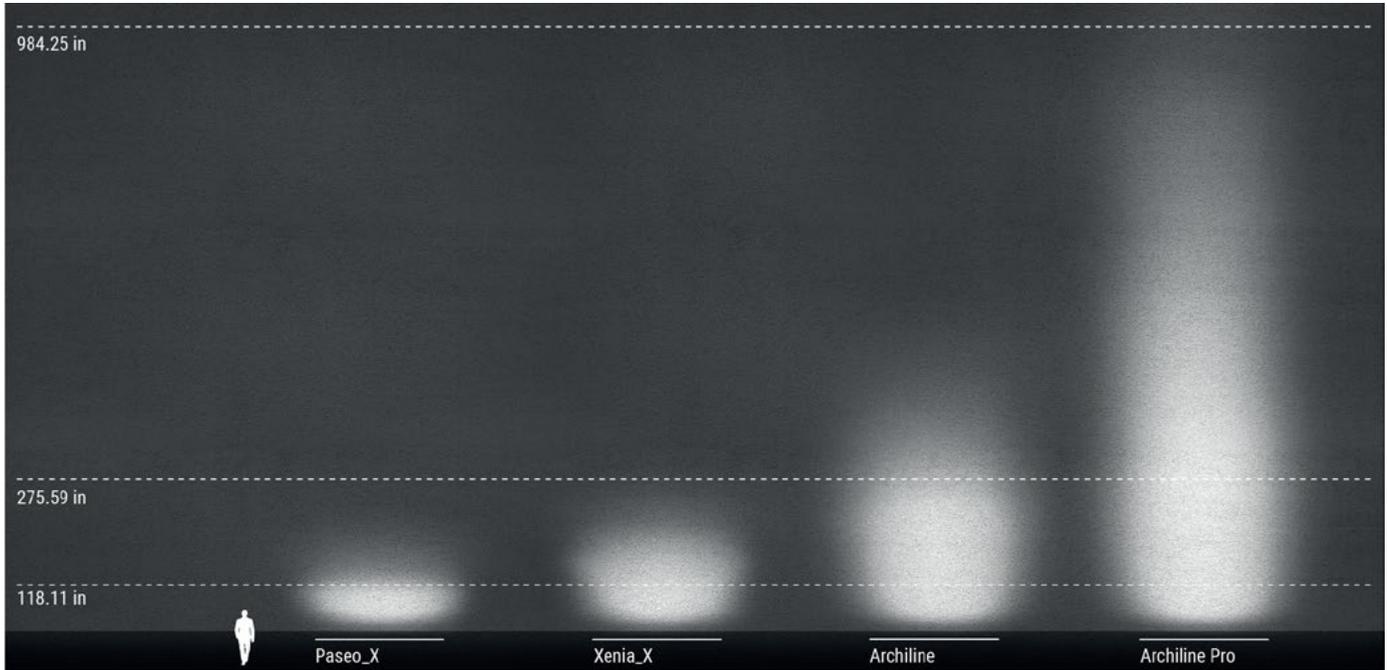

## Performance for every need

Each family of lights includes different outputs to meet the largest possible range of requirements. Paseo, Xenia, Archiline and Archiline PRO offer a particularly wide selection.

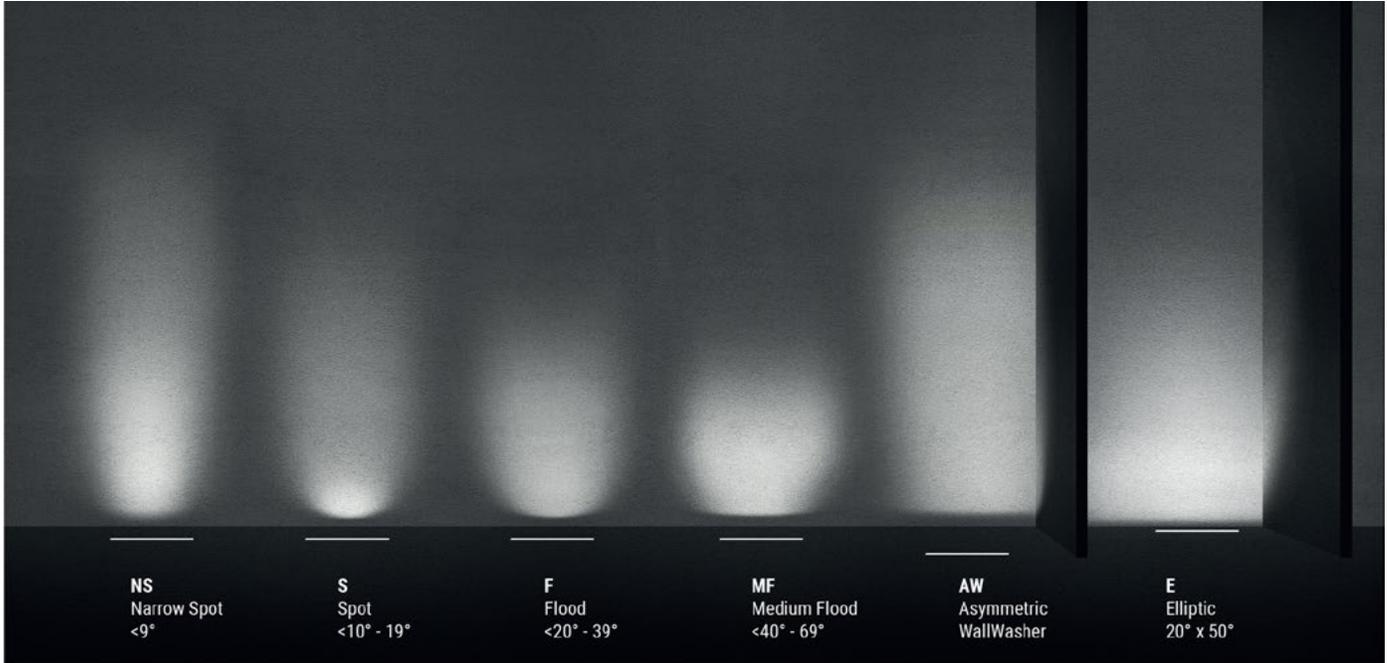

## Optical range

The Linear Lights series offers specific products for every context, and lighting solutions that vary depending on the optics you choose. There are spots, narrow spots for small or very small angles, various floods, and diffuse and wall washer lights. The Elliptic  $20^\circ \times 50^\circ$  gives an oval grazing wash for tall narrow walls, and Asymmetric provides a directional beam that washes the wall evenly.

# Paseo



**Paseo\_L**  
Length  
20/45/57"  
6 W/ft  
109 lm/W\*



**Paseo\_L  
Anti-glare**  
Length  
20/45"  
6 W/ft  
109 lm/W\*



**Paseo\_L  
RGBW**  
Length  
20/45/57"  
6 W/ft




**Paseo\_X**  
Length  
23/45"  
7 W/ft  
131 lm/W\*



**Paseo\_X  
RGBW**  
Length  
23/45"  
8 W/ft

Paseo is a highly functional and versatile range of lights. Paseo\_L, with a topLED source and anti-glare and RGBW versions, is designed for architectural illumination. It has a range of optics, from flood to asymmetric and diffuse. Paseo\_X has a powerLED source for high-output illumination, and is available with flood, medium flood, asymmetric, elliptic and diffuse optics and a wide selection of control options in the standard and RGBW versions.

## IP67

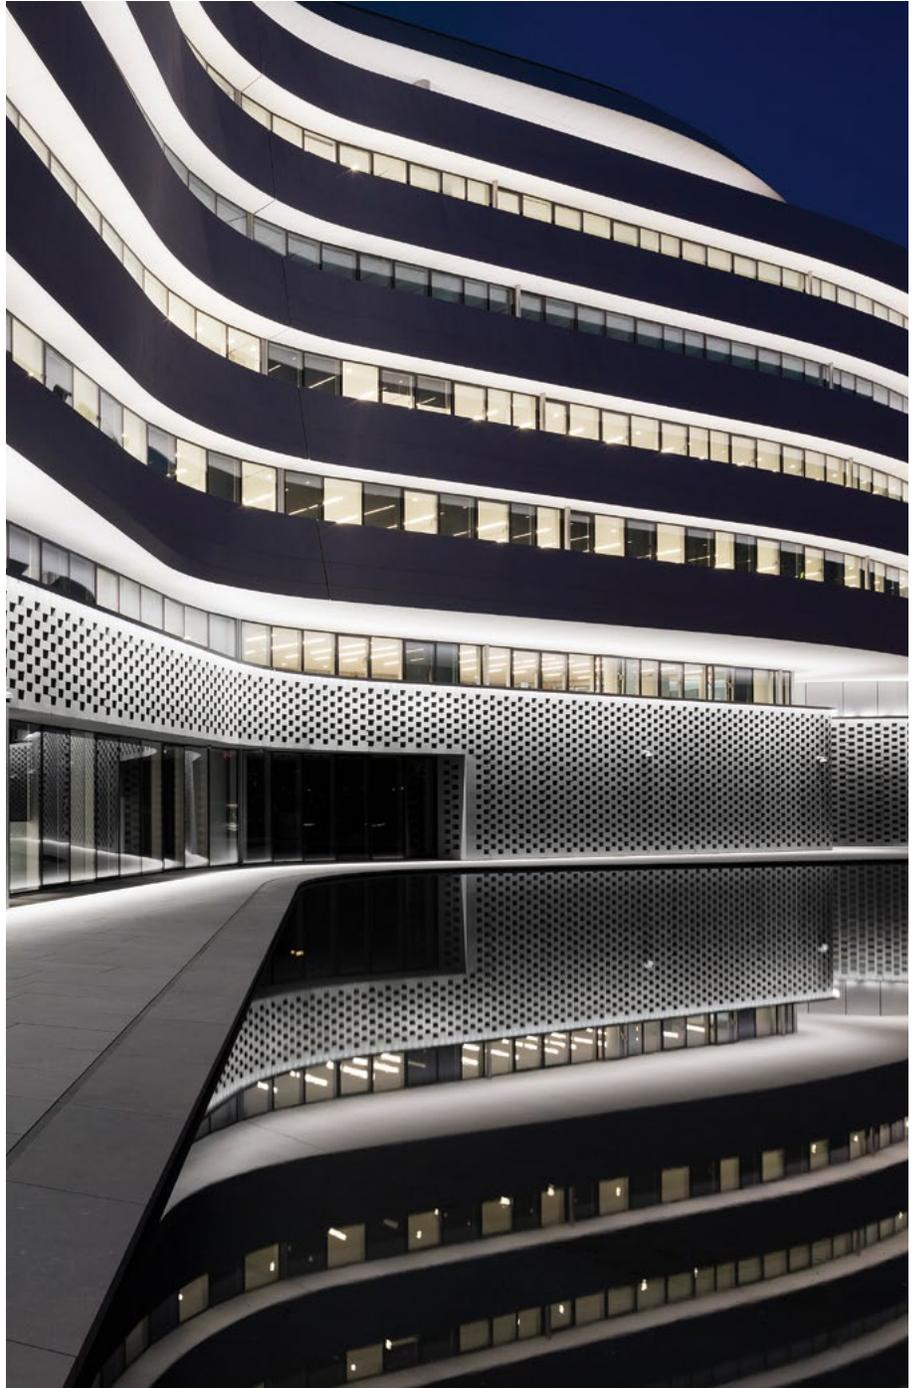

Agemar | Athens, Greece

# Paseo range


	Paseo_L 20.2 - 57.2 in 6/13/19 W	Paseo_L Anti-glare 20.2 - 57.2 in 6/13/19 W	Paseo_L RGBW 20.2 - 57.2 in 6/13/19 W	Paseo_X 20.2 - 57.2 in 7.5/15 W	Paseo_X RGBW 20.2 - 57.2 in 7.5/15 W
topLED	2700K 3000K 3500K 4000K	2700K 3000K 3500K 4000K	RGBW	-	-
powerLED	-	-	-	2700K 3000K 3500K 4000K	RGBW+W
Optics	Medium Flood Asymmetric General	Medium Flood Asymmetric	General	Narrow Spot Spot MediumFlood Flood Elliptic Asymmetric General	Elliptic
Remote Driver	24V	24V	24V + DMX	-	-
Integral Driver	120V On/Off	120V On/Off	-	120V On/Off 120V + 0-10V	120V + DMX

## Minimal size

The new Paseo models are even thinner and more versatile, with heights of 0.9 to 1.5 inch that adapt easily to any design need. Their very small size is combined with simple, minimalist aesthetics.



The Paseo range comes with a wide choice of optics, lengths, color temperatures, and controls. These include 0-10V, and RGBW DMX and RGB pixel for dynamic lighting management and spectacular architectural illumination. The housings and numerous accessories mean Paseo can be recessed or fitted to a wall, ceiling or floor.

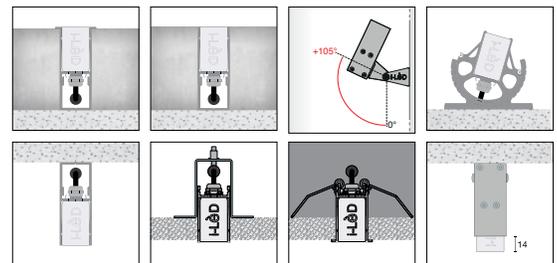

## Maximum protection

An electrostatic discharge occurs when there's a transfer of charges between two bodies that are close or in contact with each other. This often damages electronics and LED modules. Paseo fixtures with integral drivers come with an up to 4KV electrostatic discharge (ESD) protection.



Ultrasonic-welded caps offer perfect mechanical resistance and light continuity

Thermoplastic PUR cables with IP67 4 pin or 5-pin M12 quick-connectors

Steel spring clips allow you to easily install the Paseo profile into the outer casing

TCS® valve, to avoid the formation of humidity in the profile 4KV electrostatic discharge (ESD) protection.





**inter•lux**

[inter-lux.com/linealight](http://inter-lux.com/linealight)

 **linea**  
**light**  
i-LED