

Suelo



The real strength of the Suelo range is its sheer variety. Efficient, versatile, and safe, with a hardwearing flange, a black silkscreened protective screen for increased visual comfort, and the AquaStop® patented protection system, Suelo has been completely redesigned, with drive-over uplights offering unmistakable Linea Light Group quality.

Materials

Aluminum body

AISI 316L stainless steel flange



suelo range



	1 W	2 W	4.2 W	7.2 W	13 W	30 W
Suelo_R 	Ø 1 in	Ø 1.2 in	Ø 2.5 in Ø 4.1 in	Ø 3.6 in	-	-
Suelo_RJ 	-	-	Ø 2.5 in	Ø 3.6 in	-	-
Suelo_RX 	-	-	-	Ø 4.7 in	Ø 6.7 in	Ø 9.1 in
Suelo_RXJ 	-	-	-	Ø 4.7 in	Ø 6.7 in	-
SueloPRO_R 	Ø 1 in	Ø 1.4 in	Ø 2.5 in	Ø 3.6 in	-	-
SueloPRO_RX 		Ø 2 in	-	Ø 4.7 in	Ø 6.7 in	-
Suelo_RX Double 		-	-	-	Ø 6.7 in (12W)	Ø 9.1 in (24W)
Suelo Telescopic 		-	-	-	Ø 7.9 in	Ø 7.9 in (25W)
Options	-	 PRO_R, PRO_RX	 _R, PRO_R  PRO_R	 _R, _RX, PRO_R, _PRO_RX  PRO_R, _PRO_RX	 _RX, PRO_R, _PRO_RX  _RX, _PRO_RX	 _RX  _RX
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)	2700K 3000K 4000K RGBW (_RX)
Optics	Standard 20° 35°	08° 15° 30° 60° 90° Diffused	10° 20° 30° 60° 90° Diffused Elliptic Asymmetric	06° 15° 20° 30° 60° 105° Diffused Elliptic Asymmetric	06° 15° 30° 35° 45° 60° Diffused Asymmetric	06° 15° 30° 35° 60° Asymmetric
Pro	20° 35°	15° 30° 60° Elliptic Diffused	20° 30° 50°	06° 15° 30° 60°	15° 30° 60° Asymmetric	-
Driver	Remote	Remote	Remote	Remote	Remote 120-277V On/Off (PRO_RX, _RX Double)	Remote 120-277V On/Off (_RX, _RX Double)
Current	C.C. C.V. (Suelo Pro)	C.C. C.V.	C.C. C.V.	C.C. C.V.	C.C.	C.C.

The range


The Suelo family offers a variety of solutions for every design need: fixed and tiltable versions, small-flanged flush-mount uplights. There are PRO models with recessed optics. RGBW engines and beam control filters are also available. All models have the exclusive AquaStop® protection systems, and there are versions with 24V converters.



Visual comfort

Suelo fixtures with honeycomb louver, screen secondary light and reduce glare, maintaining a high-quality light. A darklight filter directs the illumination onto the intended part of the wall by sectioning part of the beam, and prevents glare even close to the source.

For full beam control and a drastically reduced glare risk, choose the Suelo PRO versions, in which the recessed source increases the screening angle, totally skimming off the secondary flow to give a cleaner, more concentrated and efficient light.

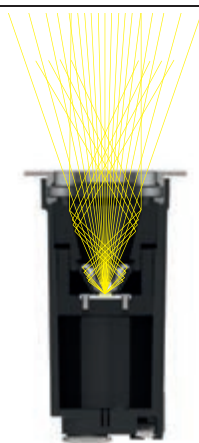

Suelo PRO



Suelo + Honeycomb




Suelo + Darklight

Performance and control


Six outputs to choose from, ranging from 1 to 30 watts, three color temperatures including warm light at 2700 and 3000K, and daylight at 4000K.

The uniquely wide spectrum of optics includes an elliptical, a wall wash for high, narrow walls, and an asymmetric version that gives an even, homogeneous wash.


Spot

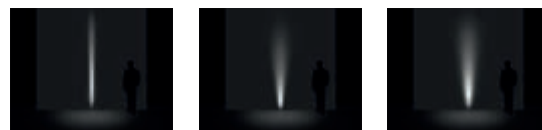


Flood

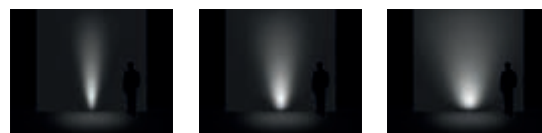


Diffused

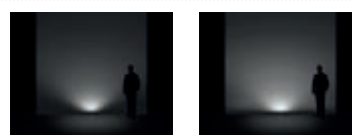

Asymmetric



Suelo_R | Up-Light | powerLED | Submersible | Driver remote | Driver over | 1W 350mA



Steel	E80432	2700K	136 lm	M	Medium Flood	20
		3000K	145 lm	W	Medium Flood	35
		4000K	155 lm	N		

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures


Recessed casings



E99676
Outer casing for
ground-mounting
installation IP67



SueloPRO_R | Up-Light | powerLED | Submersible | Driver remote | Driver over | 1W



C.C. - 350mA

Steel	E80433	2700K	136 lm	M	Medium Flood	20
		3000K	145 lm	W	Medium Flood	35
		4000K	155 lm	N		

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures


C.V. - 24V

Steel	E80434	2700K	136 lm	M	Medium Flood	20
		3000K	145 lm	W	Medium Flood	35
		4000K	155 lm	N		

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location

Recessed casings



E99677
Outer casing for
ground-mounting
installation
IP67/68



Suelo_R | Up-Light | powerLED | Wet location | Driver remote | Walk over | 2W 630mA



Chrome E93141	2700K	219 lm	M	Narrow Spot	08
	3000K	233 lm	W	Spot	15
	4000K	249 lm	N	Medium Flood	30
				Flood	60
				Wide Flood	12
				General	00



Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

Recessed casings



SueloPRO_R | Up-Light | powerLED | Wet location | Driver remote | Driver over | 2W



C.C. - 630mA

Steel/Alu E80439	2700K	205 lm	M	Spot	15
	3000K	233 lm	W	Medium Flood	30
	4000K	249 lm	N	Flood	60
				Elliptic	88
				General	00



Steel/Alu E80440	2700K	205 lm	M	Spot	15
	3000K	233 lm	W	Medium Flood	30
	4000K	249 lm	N	Flood	60

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

C.V. - 24V

Steel/Alu E80441	2700K	205 lm	M	Spot	15
	3000K	233 lm	W	Medium Flood	30
	4000K	249 lm	N	Flood	60
				Elliptic	88
				General	00



Steel/Alu E80442	2700K	205 lm	M	Spot	15
	3000K	233 lm	W	Medium Flood	30
	4000K	249 lm	N	Flood	60

Power supply options (remote only)


OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location

Recessed casings



Suelo_R | Up-Light | powerLED | Wet location | Driver remote | Driver over | 4.2W

E80443 / E80444 / E80445 / E80446

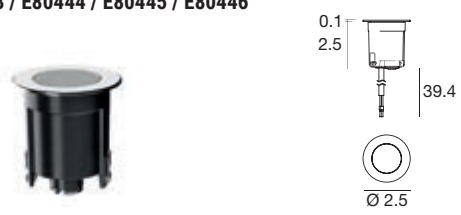

Recessed casings

E84936
Outer casing for ground-mounting installation




C.C. - 350mA

Steel	Alu	E80443	2700K	490 lm	M	Spot	10
			3000K	490 lm	W	Medium Flood	20
			4000K	529 lm	N	Medium Flood	30
						Flood	60
						Elliptic	88
						Wide Flood	12
						General	00

Steel	Alu	E81089	2700K	490 lm	M	Asymmetric	07
			3000K	490 lm	W		
			4000K	529 lm	N		

HC	Steel/Alu	E80444	2700K	490 lm	M	Medium Flood	20
			3000K	490 lm	W	Medium Flood	30
			4000K	529 lm	N	Flood	60

E81089 / E81090

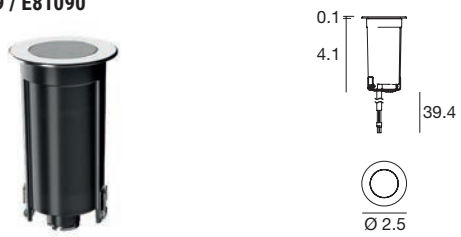

Recessed casings

E84935
Outer casing for ground-mounting installation



Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

C.V. - 24V


Steel	Alu	E80445	2700K	490 lm	M	Spot	10
			3000K	490 lm	W	Medium Flood	20
			4000K	529 lm	N	Medium Flood	30
						Flood	60
						Elliptic	88
						Wide Flood	12
						General	00

Steel	Alu	E81090	2700K	490 lm	M	Asymmetric	07
			3000K	490 lm	W		
			4000K	529 lm	N		


HC	Steel	Alu	E80446	2700K	490 lm	M	Medium Flood	20	
				3000K	490 lm	W	Medium Flood	30	
				4000K	529 lm	N	Flood	60	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location



SueloPRO_R | Up-Light | powerLED | Wet location | Driver remote | Driver over | 4.2W



C.C. - 350mA

Steel Alu	E80449	2700K	490 lm	M	Medium Flood	20
		3000K	490 lm	W	Medium Flood	30
		4000K	529 lm	N	Flood	50

HC

Steel | Alu **E80450**

DL

Steel | Alu **E80451**

Power supply options (remote only)

ECO30W-350



0-10V EldoLED ECOdrive
30W for 1-3 fixtures

SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-6 fixtures

SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-12 fixtures



Comfort

C.V. - 24V

Steel Alu	E80452	2700K	490 lm	M	Medium Flood	20
		3000K	490 lm	W	Medium Flood	30
		4000K	529 lm	N	Flood	50

HC

Steel | Alu **E80453**

DL

Steel | Alu **E80454**

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24V
DC, 120-277VAC, supplied in a Dry
location

OT96-JBX

Osram, Non-dim 24V DC, 120-
277VAC, Wet location


Recessed casings



E84935

Outer casing for
ground-mounting
installation

Suelo_RJ | Up-Light | powerLED | Wet location | Driver remote | Adjustable | Driver over | 4.2W



C.C. - 350mA

Steel/Alu	E80455	2700K	490 lm	M	Medium Flood	20
		3000K	490 lm	W	Medium Flood	30
		4000K	529 lm	N	Flood	60

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

C.V. - 24V

Steel/Alu	E80456	2700K	490 lm	M	Medium Flood	20
		3000K	490 lm	W	Medium Flood	30
		4000K	529 lm	N	Flood	60

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location


Recessed casings



E84936
Outer casing for
ground-mounting
installation




Suelo_R | Up-Light | powerLED | Wet location | Driver remote | Driver over | 7.2W



C.C. - 7.2W - 630mA

Steel/Alu	E80546	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
		4000K	1013 lm	N	Medium Flood	30
					Flood	60
					Elliptic	88
					Wide Flood	12
					General	00
					Asymmetric	07



Steel/Alu	E80547	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
		4000K	1013 lm	N	Medium Flood	30
					Flood	60

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures

C.V. - 7.2W - 24V

Steel/Alu	E80550	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
		4000K	1013 lm	N	Medium Flood	30
					Flood	60
					Elliptic	88
					Wide Flood	12
					General	00
					Asymmetric	07



Steel/Alu	E80551	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
		4000K	1013 lm	N	Medium Flood	30
					Flood	60

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location



RGBW - 8W - 630mA


Steel/Alu	E81717	RGBW natural white	Q	Narrow Spot	06
		RGBW warm white	V	Medium Flood	15
				Flood	45

Power supply options (remote only)


PWR50W-630

DMX driver, EldoLED POWERdrive 50W
Factory pre-programmed or RDM programmable, DMX
control not included/Ordered separately
50W for 1-4 Fixtures

Recessed casings



E99680
Outer casing for
ground-mounting
installation

SueloPRO_R | Up-Light | powerLED | Wet location | Driver remote | Driver over | 7.2W


C.C. - 630mA

Steel/Alu	E80558	2700K	877 lm	M	Narrow Spot	06
Steel/Alu	E80559	3000K	945 lm	W	Spot	15
Steel/Alu	E80560	4000K	1013 lm	N	Medium Flood	30
					Flood	60

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures


C.V. - 24V




Steel/Alu	E80564	2700K	877 lm	M	Narrow Spot	06
Steel/Alu	E80565	3000K	945 lm	W	Spot	15
Steel/Alu	E80566	4000K	1013 lm	N	Medium Flood	30
					Flood	60

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location

Recessed casings


E99680
Outer casing for
ground-mounting
installation

Suelo_RJ | Up-Light | powerLED | Wet location | Driver remote | Adjustable | Driver over | 7.2W


C.C. - 630mA

Steel/Alu	E80576	2700K	709 lm	M	Medium Flood	20
		3000K	760 lm	W	Medium Flood	30
		4000K	821 lm	N	Flood	60

Power supply options (remote only)


ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures

C.V. - 24V

Steel/Alu	E80578	2700K	709 lm	M	Medium Flood	20
		3000K	760 lm	W	Medium Flood	30
		4000K	821 lm	N	Flood	60

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location



Recessed casings


E99680
Outer casing for
ground-mounting
installation





SueloPRO_RX | Screw-in | Up-Light | powerLED | Wet location | Driver remote | Driver over | 2W



C.C. - 600mA

Steel	Alu	E80435	2700K	205 lm	M	Spot	15
			3000K	233 lm	W	Medium Flood	30
			4000K	249 lm	N	Flood	60
						General	00

Steel	Alu	E80436	2700K	205 lm	M	Spot	15
			3000K	233 lm	W	Medium Flood	30
			4000K	249 lm	N	Flood	60

Power supply options (remote only)

ECO30W-600	SOLO50W-600	SOLO100W-600
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

C.V. - 24V

Steel	Alu	E80437	2700K	205 lm	M	Spot	15
			3000K	233 lm	W	Medium Flood	30
			4000K	249 lm	N	Flood	60
						General	00



Steel	Alu	E80438	2700K	205 lm	M	Spot	15
			3000K	233 lm	W	Medium Flood	30
			4000K	249 lm	N	Flood	60


Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location


Recessed casings



E99685
Outer casing for
ground-mounting
installation
IP67/68

Suelo_RX | Screw-in | Up-Light | powerLED | Wet location | Driver remote | Driver over | 7.2W

C.C. - 7.2W - 630mA

Steel	Alu	E80548					
			2700K	877 lm	M	Narrow Spot	06
			3000K	945 lm	W	Spot	15
			4000K	1013 lm	N	Medium Flood	30
						Flood	60
						Elliptic	88
						Wide Flood	12
						General	00
						Asymmetric	07


HC

Steel	Alu	E80549					
			2700K	877 lm	M	Narrow Spot	06
			3000K	945 lm	W	Spot	15
			4000K	1013 lm	N	Medium Flood	30
						Flood	60

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures

C.V. - 7.2W - 24V

Steel	Alu	E80552					
			2700K	877 lm	M	Narrow Spot	06
			3000K	945 lm	W	Spot	15
			4000K	1013 lm	N	Medium Flood	30
						Flood	60
						Elliptic	88
						Wide Flood	12
						General	00
						Asymmetric	07

HC

Steel	Alu	E80553					
			2700K	877 lm	M	Narrow Spot	06
			3000K	945 lm	W	Spot	15
			4000K	1013 lm	N	Medium Flood	30
						Flood	60

Power supply options (remote only)


OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120- 277VAC, Wet location


RGBW
RGBW - 8W - 630mA

Steel	Alu	E81718					
			RGBW natural white	Q	Narrow Spot	06	
			RGBW warm white	V	Medium Flood	15	
					Flood	45	



Power supply options (remote only)
PWR50W-630

DMX driver, EldoLED POWERdrive 50W
Factory pre-programmed or RDM programmable, DMX
control not included/Ordered separately
50W for 1-4 Fixtures

Recessed casings

E98121

Outer casing for
ground-mounting
installation

SueloPRO_RX | Screw-in | Up-Light | powerLED | Wet location | Driver remote | Driver over | 7.2W



C.C. - 630 mA

Steel/Alu	E80561	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
Steel/Alu	E80562	4000K	1013 lm	N	Medium Flood	30
					Flood	60

HC

DL

Steel/Alu **E80563**

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures

C.V. - 24V

Steel/Alu	E80567	2700K	877 lm	M	Narrow Spot	06
		3000K	945 lm	W	Spot	15
Steel/Alu	E80568	4000K	1013 lm	N	Medium Flood	30
					Flood	60

HC


DL

Steel/Alu **E80569**

Power supply options (remote only)


OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120-277VAC, Wet location

Recessed casings



E98121
Outer casing for
ground-mounting
installation

Suelo_RXJ | Screw-in | Up-Light | powerLED | Wet location | Driver remote | Adjustable | Driver over | 7.2W



C.C. - 630 mA

Steel/Alu	E80577	2700K	709 lm	M	Medium Flood	20
		3000K	760 lm	W	Medium Flood	30
Steel/Alu	E80579	4000K	821 lm	N	Flood	60

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures


C.V. - 24V

Steel/Alu	E80579	2700K	709 lm	M	Medium Flood	20
		3000K	760 lm	W	Medium Flood	30
Steel/Alu	E80579	4000K	821 lm	N	Flood	60

Power supply options (remote only)



OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24V DC, 120-277VAC, supplied in a Dry location	Osram, Non-dim 24V DC, 120-277VAC, Wet location

Recessed casings



E98121
Outer casing for
ground-mounting
installation



Suelo_RX | Screw-in | Up-Light | arrayLED | Wet location | Driver remote | Driver over | 13W 350mA


Steel/Alu	E80607	2700K	1724 lm	M	Spot	15
		3000K	1724 lm	W	Medium Flood	35
		4000K	1854 lm	N	Flood	60
Steel/Alu	E81109	2700K	1683 lm	M	Asymmetric	07
		3000K	1808 lm	W		
		4000K	1949 lm	N		
Steel/Alu	E80608	2700K	1470 lm	M	Narrow Spot	06
		3000K	1470 lm	W		
		4000K	1587 lm	N		
Steel/Alu	E81740	2700K	1724 lm	M	Spot	15
		3000K	1724 lm	W	Medium Flood	35
		4000K	1854 lm	N	Flood	60
Steel/Alu	E81741	2700K	1724 lm	M	Spot	15
		3000K	1724 lm	W	Medium Flood	35
		4000K	1854 lm	N	Flood	60

Power supply options (remote only)
ECO30W-350

 0-10V EldoLED ECOdrive
30W for 1 fixture

SOLO50W-350

 0-10V EldoLED SOLOdrive
50W for 1-2 fixtures

SOLO100W-350

 0-10V EldoLED SOLOdrive
100W for 1-4 fixtures

RGBW - 16W - 350mA

Steel/Alu	E81719	RGBW natural white	Q	Spot	15
		RGBW warm white	V	Medium Flood	30
				Flood	60



Power supply options (remote only)
PWR50W-350

DMX driver, EldoLED POWERdrive 50W Factory pre-programmed or RDM programmable, DMX control not included/Ordered separately for 1-2 Fixtures

Recessed casings

E84933

 Outer casing for
ground-mounting
installation


SueloPRO_RX | Screw-in | Up-Light | arrayLED | 120-277V | Wet location | Integral Driver | Driver over | 13W 350mA

On/Off

Steel	Alu	E80611	2700K	1724 lm	M	Spot	15
			3000K	1724 lm	W	Medium Flood	35
			4000K	1854 lm	N	Flood	60
Steel	Alu	E80612	2700K	1743 lm	M	Asymmetric	07
			3000K	1863 lm	W		
			4000K	1863 lm	N		
Steel	Alu	E81744	2700K	1470 lm	M	Spot	15
			3000K	1470 lm	W	Medium Flood	35
			4000K	1587 lm	N	Flood	60
Steel	Alu	E81745	2700K	1470 lm	M	Spot	15
			3000K	1470 lm	W	Medium Flood	35
			4000K	1587 lm	N	Flood	60

Recessed casings

E84932

 Outer casing for
ground-mounting
installation

Suelo_RXJ | Screw-in | Up-Light | arrayLED | Wet location | Driver remote | Adjustable | Driver over | 13W


Steel/Alu	E80613	2700K	1724 lm	M	Spot	15
		3000K	1724 lm	W	Medium Flood	35
		4000K	1854 lm	N	Flood	45

Power supply options (remote only)
ECO30W-350

0-10V EldoLED ECOdrive
30W for 1 fixture

SOLO50W-350

0-10V EldoLED SOLOdrive
50W for 1-2 fixtures



SOLO100W-350

0-10V EldoLED SOLOdrive
100W for 1-4 fixtures

Recessed casings

E84933

Outer casing for
ground-mounting
installation

Suelo_RX | Screw-in | Up-Light | 120-277V | arrayLED | Wet location | Integral Driver | Driver over | 840mA

On/Off 30W

Steel/Alu	E80614	2700K	4088 lm	M	Spot	15
		3000K	4372 lm	W	Medium Flood	35
		4000K	4702 lm	N	Flood	60

Steel/Alu	E80615	2700K	3428 lm	M	Narrow Spot	06
		3000K	3428 lm	W		
		4000K	3700 lm	N		

Steel/Alu	E80616	2700K	3999 lm	M	Asymmetric	07
		3000K	4294 lm	W		
		4000K	4631 lm	N		




Steel/Alu	E81746	2700K	4088 lm	M	Spot	15
		3000K	4372 lm	W	Medium Flood	35
		4000K	4702 lm	N	Flood	60

RGBW - 30W - 630mA

Steel/Alu	E81737	RGBW natural white	Q	Spot	15
		RGBW warm white	V	Medium Flood	30
				Flood	60


Power supply options (remote only)
PWR50W-630

DMX driver, EldoLED POWERdrive 50W
Factory pre-programmed or RDM programmable, DMX
control not included/Ordered separately
50W for 1 Fixture

Recessed casings

E99794

Outer casing for
ground-mounting
installation

Suelo_RX Double | Screw-in | Up-Light | arrayLED | 120-277V | Wet location | Integral Driver | Adjustable | Driver over | 12W 350mA



On/Off


Steel	Alu	E81619	2700K	1114 lm	M	Spot	15
			3000K	1176 lm	W	Medium Flood	30
			4000K	1300 lm	N	Flood	60

Recessed casings



E84932
Outer casing for
ground-mounting
installation

Suelo_RX Double | Screw-in | Up-Light | arrayLED | 120-277V | Wet location | Integral Driver | Adjustable | Driver over | 24W 700mA



CRI 80

Steel	Alu	E81620	2700K	2207 lm	M	Spot	15
			3000K	2377 lm	W	Medium Flood	30
			4000K	2547 lm	N	Flood	60

Recessed casings



E99794
Outer casing for
ground-mounting
installation


Receded optical
compartment

Independent tilting

Optics customisable
separately upon request



Suelo Telescopic | Up-Light | arrayLED | 120-277V | Wet location | Driver on-board | 13W 350mA



CRI 80

DarkBrown **E81475**

2700K	1743 lm	M	Spot	15
3000K	1863 lm	W	Medium Flood	30
4000K	1863 lm	N	Flood	60


Recessed casings



E99747

Outer casing for ground-mounting installation

Suelo Telescopic | Up-Light | arrayLED | 120-277V | Wet location | Driver remote | 25W 700mA



CRI 80

DarkBrown **E81476**

2700K	3580 lm	M	Spot	15
3000K	3847 lm	W	Medium Flood	30
4000K	3847 lm	N	Flood	60

Recessed casings



E99747

Outer casing for ground-mounting installation

