

# ProTools 4" Downlights



whitegoods



# whitegoods

Whitegoods has developed another range of minimal lighting tools, which utilize the form factor of LED to reduce even further their visual impact, and of course they all hold true to our constant principles.

## Our Philosophy

- Reduction of detail
- Seamless architectural integration
- Logical, modular systems and families of products
- Ease of specification, installation and maintenance



# ProTools Range Modularity





The ProTools range of professional lighting tools has been developed as a flexible and adaptable system.

One unified range can meet the demands of all spaces within a project, from the simplest requirements to the most demanding, all with a genuinely matching aesthetic appearance.

## Frame

Select from Plaster Trim or Bezel Trim. Once the mounting frame is fitted, it can accept any insert within the range, all of which can be installed and accessed from below.




The same is true for their driver box.



## Insert

Choose the insert to suit your needs:





- Simple ambient light from the D insert.
- Various beam angles from fixed or adjustable.
- Ultimate performance, superb glare control, lens options and a unique void shielding system with the DLX insert.



## Cover


Complete with your choice of cover:

- Flush Satin Opal
- Recessed Cone
- Wall Wash
- Regressed Pinhole
- Asymmetric
- Wet Location



# ProTools Range Logic

The ProTools range allows the specifier freedom to design for all spaces and environments within a project from one succinct, logical and aesthetically congruent range of luminaires. The comprehensive options cover all of the designer's needs.

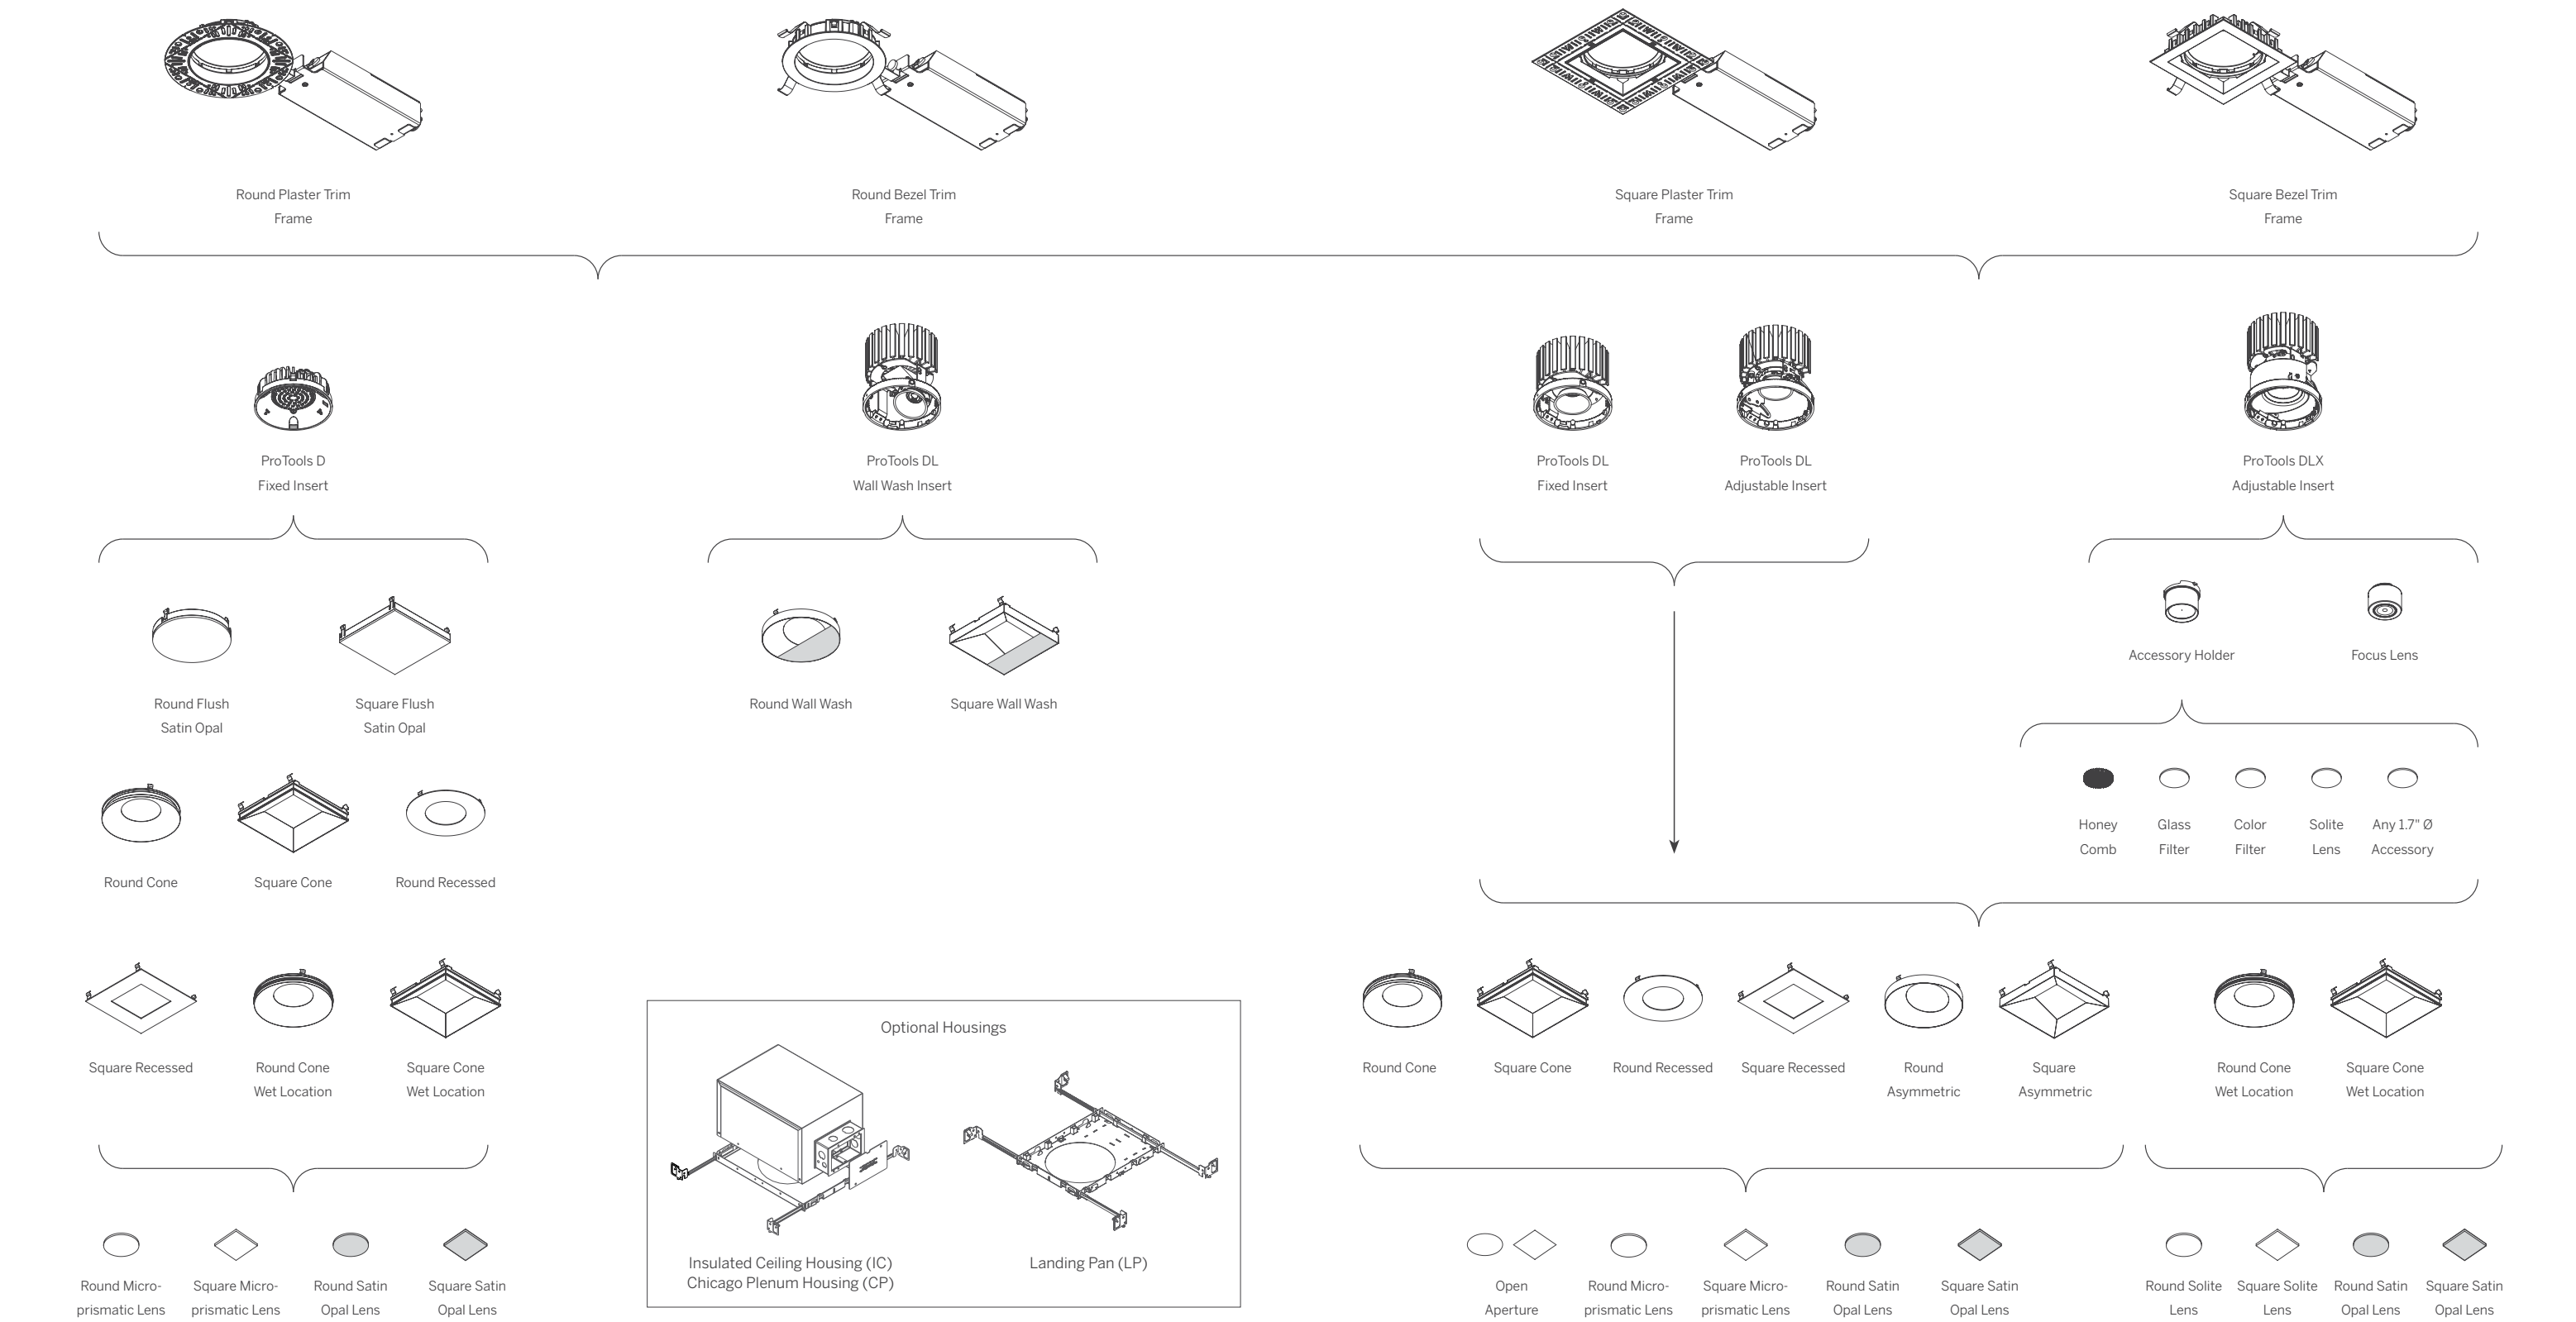



# ProTools Aim Stick & Aim Stick Laser


"Hot aiming" has been a buzzword in the lighting industry for decades. However, these days, it is something of a misnomer, as luminaires with LED technology run much cooler than their predecessors. Moreover, the traditional requirement for "lockable" fixtures related to the fact that their carefully aimed position would inevitably be disturbed during re-lamping every few thousand hours. The locking mechanism was there to minimize this. As LEDs will now more than likely outlast the serviceable life of an installation, this requirement is redundant. Market leading COB LEDs mean that, once set, the luminaire is unlikely to need servicing.

Instead, we have ensured that the position of our adjustable downlights is "fixed as set" by default. The 365 degree rotation is incrementally defined by a spring-loaded ratchet system, ensuring that the position achieved is fixed the moment it is set. The aiming angle is likewise held fast by four, factory torque set, friction points.

Whitegoods products are designed with input from lighting designers who have years of real life, first hand experience of specifying and using luminaires of all kinds. We know that construction sites can be difficult places to work. Focusing a project when the BMS or lighting control system is also being commissioned can mean wasted hours waiting for the lights to come on. With ProTools the designer can focus the project with lights on or off, utilizing the unique aiming stick with laser sight, allowing total confidence that the luminaire will hit its target.

If you don't have one on hand, don't worry. A long thin screwdriver can be used to do the same job, albeit without the laser aiming of course.


ProTools Aim Stick

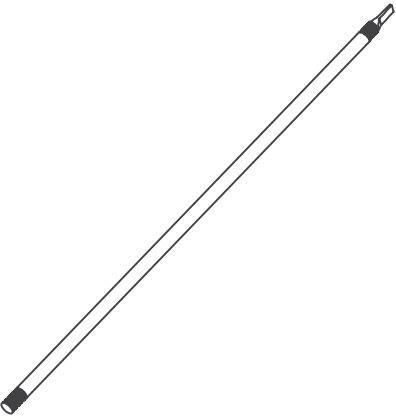

ProTools Aim Stick Laser




1

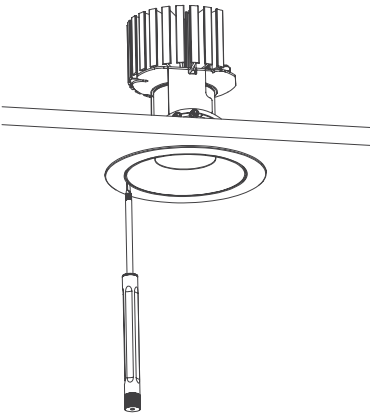


Gently insert the edge of the Aim Stick into the gap between the housing and the cover.

2

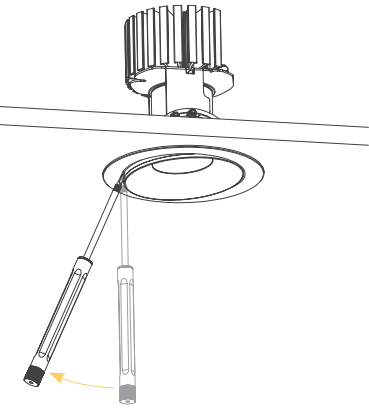


Lever out the cover.

3

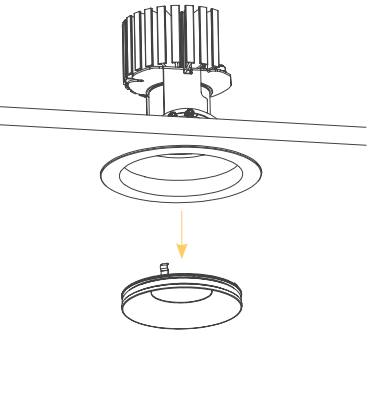

Remove the cover.


4

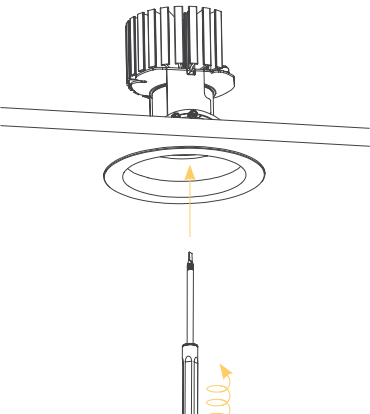


Locate the designated hole for the tool. Insert the ProTools Aim Stick into the housing and screw in a few short twists.

View from under the ProTools DLX.

The designated hole for the Aim Stick is highlighted in yellow.




5

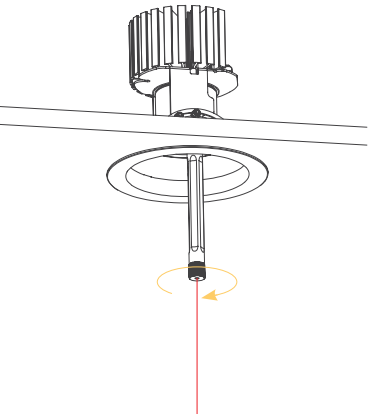

Activate the laser by rotating the black dial on the bottom of the Aim Stick clockwise.

6

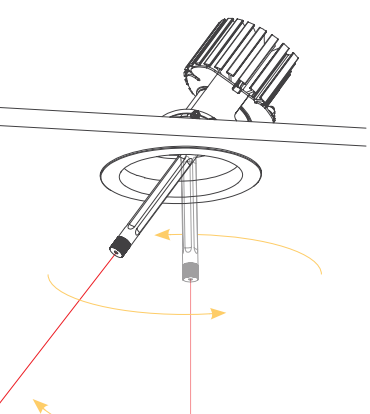


Use the tool to rotate the direction of the beam to the desired point. The ProTools DLX can rotate 365° and has a tilt of 45°, the ProTools DL Adjustable can rotate 365° and has a tilt of 40°.


Once the required adjustment has been made, repeat steps 3-6 in reverse.

# ProTools 'Snap Gangable' Installation Frames


The designers at Whitegoods have developed a truly innovative system for effortlessly creating multiple groups of luminaires in perfect formation without the need for any custom order housings. It is simple, easy and fast to create any combination required.

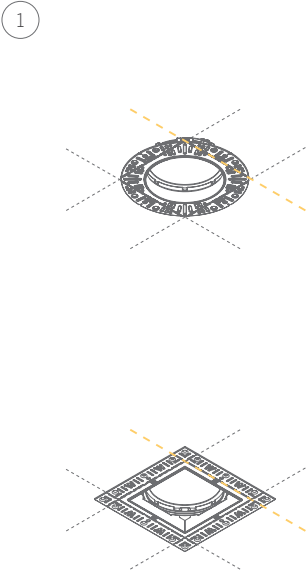


Select which side of the plaster trim to remove.

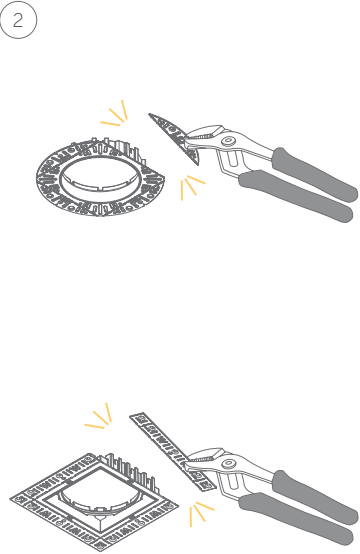


Use a pair of multi-grip pliers and firmly snap off the trim with one swift movement.

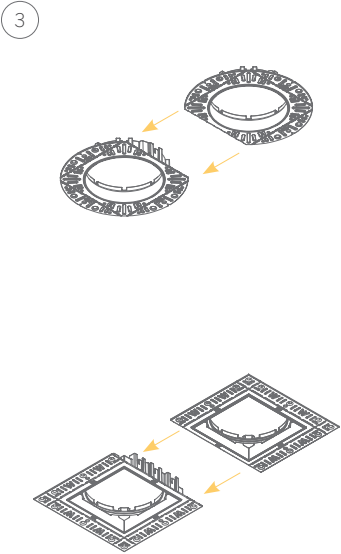


Installation frames can now be fixed directly next to one another...

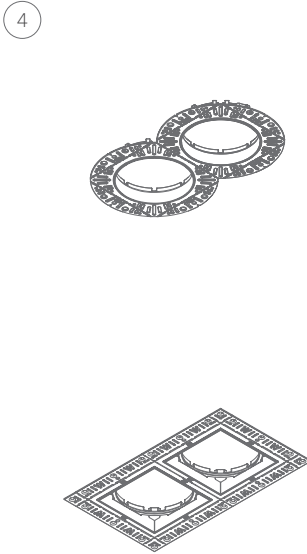

...to create "multiple" configurations, which would usually require additional dedicated housings.

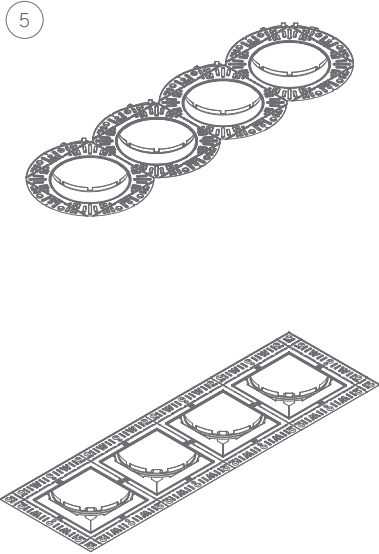

Any number of frames can be grouped together to form linear configurations.

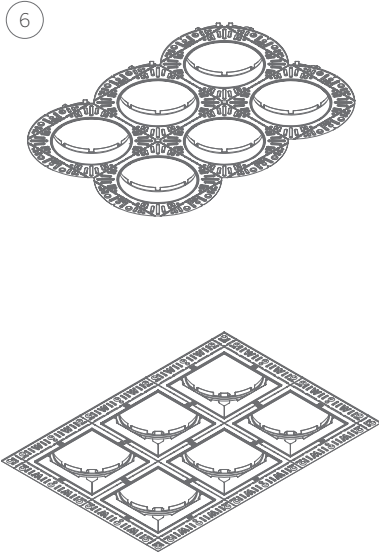

There are really no limits to the ways in which the installation frames can be combined.

# Tuneable White

ProTools DL and DLX are available in Tuneable White to allow you to select any color temperature between 1800K and 4000K, while maintaining the same high quality color rendering as the standard led. This feature is often used in health and wellness applications, as well as work spaces to increase productivity, architectural spaces to match natural light, and for design focus in retail and hospitality environments.

Color Temperature	Description	Typical Usage
4000K	Cool	Office, Exterior
3500K	Neutral Cool	Office
3000K	Neutral Warm	Office, Residential
2700K	Warm: Halogen Incandescent	Residential, Hotel
1800K	Very Warm Incandescent	Residential



# Warm Dim

Whitegoods Warm Dim lighting provides LED dimming and warm LED lights virtually indistinguishable from an incandescent light source. Designed to precisely mimic the black body curve of a standard 100W A19 lamp by gradually transitioning from 1800K to 3000K.

Color Temperature	Description	Typical Usage
3000K	Neutral Warm	Office, Residential
2700K	Warm: Halogen Incandescent	Residential, Hotel
1800K	Very Warm Incandescent	Residential








## ProTools Future-proofing

The complete ProTools Downlight range is designed to allow complete flexibility of application, today, next month, next year, and beyond.

The modular design means that any combination of insert and cover can be fitted into the mounting frame, and at any time. For example, imagine an installation called for Wall Wash inserts and covers initially, but some years on the customer has a different requirement – adjustable downlights are now needed. No problem! Simply follow these few simple steps and the installation can be completely re-purposed, quickly and easily.




4" ProTools DL Wall Wash  
Round Wall Wash Cover




4" ProTools DL Adjustable  
Round Regressed Cone Cover


- ① Insert the edge of the Aim Stick into the gap between the housing and the cover.

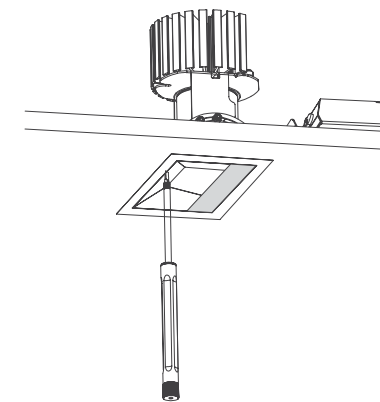


- ② Lever out the cover.

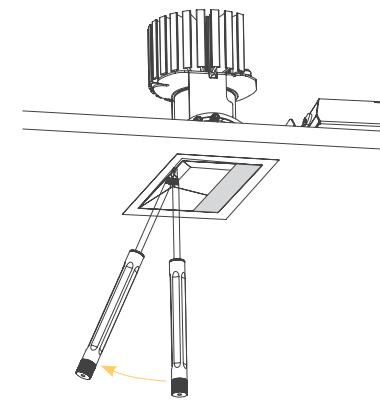


- ③ Remove the cover.

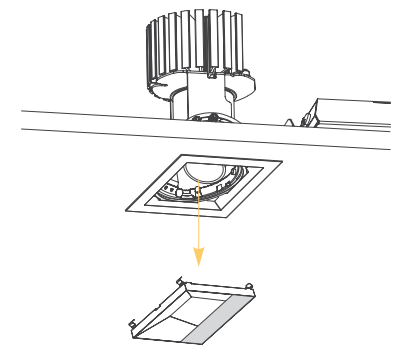


- ④ Remove Wall Wash insert and disconnect in-line connector (tool free) from driver / junction box.

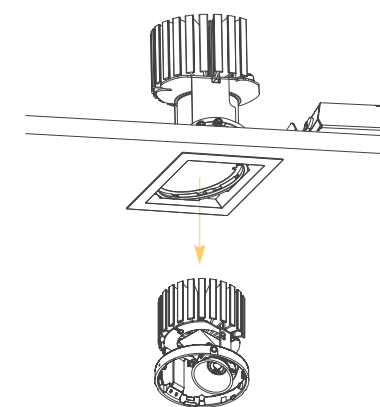

- ⑤ Connect replacement insert via inline connector (tool free) to driver / junction box, then snap into the housing.

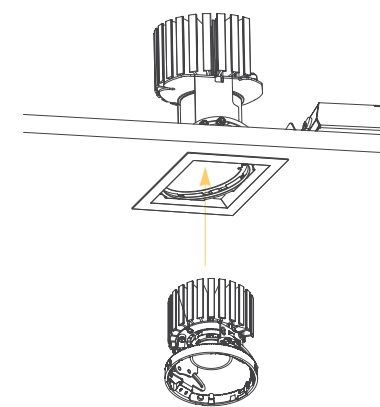



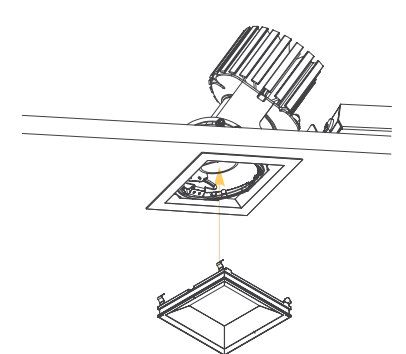







- ⑥ Fit new / preferred cover by simply snapping it home into the housing trim.













The ProTools 4" downlight family offers trimless and trim, round or square, ambient light, or adjustable, wall washers, ultimate performance, superb glare control, lens options and the Whitegoods attention to integration with surrounding materials.











Made in the USA and in stock in Maryland.





Fixed Downlights

	<b>4" ProTools D Downlight Square Flush Diffuser</b> Product details Design guide	26 100-104
	<b>4" ProTools D Downlight Round Flush Diffuser</b> Product details Design guide	28 100-104
	<b>4" ProTools D Downlight Square Recessed Cone</b> Product details	30
	<b>4" ProTools D Downlight Round Recessed Cone</b> Product details	32
	<b>4" ProTools D Downlight Square Regressed Pinhole</b> Product details	34
	<b>4" ProTools D Downlight Round Regressed Pinhole</b> Product details	36
	<b>4" ProTools DL Downlight Square Recessed Cone</b> Product details Design guide	38 100-103
	<b>4" ProTools DL Downlight Round Recessed Cone</b> Product details Design guide	40 100-103
	<b>4" ProTools DL Downlight Square Regressed Pinhole</b> Product details Design guide	42 100-103
	<b>4" ProTools DL Downlight Round Regressed Pinhole</b> Product details Design guide	44 100-103



Adjustable Downlights

	<b>4" ProTools DL Adjustable Square Recessed Cone</b> Product details Design guide	46 100-103
	<b>4" ProTools DL Adjustable Round Recessed Cone</b> Product details Design guide	48 100-103
	<b>4" ProTools DL Adjustable Square Regressed Pinhole</b> Product details Design guide	50 100-103
	<b>4" ProTools DL Adjustable Round Regressed Pinhole</b> Product details Design guide	52 100-103
	<b>4" ProTools DL Adjustable Square Asymmetric Cone</b> Product details Design guide	54 100-103
	<b>4" ProTools DL Adjustable Round Asymmetric Cone</b> Product details Design guide	56 100-103
	<b>4" ProTools DLX Adjustable Square Recessed Cone</b> Product details Design guide	62 100-103
	<b>4" ProTools DLX Adjustable Square Recessed Cone - Narrow</b> Product details Design guide	64 100-103
	<b>4" ProTools DLX Adjustable Square Recessed Cone - Zoom</b> Product details Design guide	66 100-103
	<b>4" ProTools DLX Adjustable Round Recessed Cone</b> Product details Design guide	68 100-103

	<b>4" ProTools DLX Adjustable Round Recessed Cone - Narrow</b> Product details Design guide	70 100-103
	<b>4" ProTools DLX Adjustable Round Recessed Cone - Zoom</b> Product details Design guide	72 100-103
	<b>4" ProTools DLX Adjustable Square Regressed Pinhole</b> Product details Design guide	74 100-103
	<b>4" ProTools DLX Adjustable Square Regressed Pinhole - Narrow</b> Product details Design guide	76 100-103
	<b>4" ProTools DLX Adjustable Square Regressed Pinhole - Zoom</b> Product details Design guide	78 100-103
	<b>4" ProTools DLX Adjustable Round Regressed Pinhole</b> Product details Design guide	80 100-103
	<b>4" ProTools DLX Adjustable Round Regressed Pinhole - Narrow</b> Product details Design guide	82 100-103
	<b>4" ProTools DLX Adjustable Round Regressed Pinhole - Zoom</b> Product details Design guide	84 100-103
	<b>4" ProTools DLX Adjustable Square Asymmetric Cone</b> Product details Design guide	86 100-103
	<b>4" ProTools DLX Adjustable Square Asymmetric Cone - Narrow</b> Product details Design guide	88 100-103

	<b>4" ProTools DLX Adjustable Square Asymmetric Cone - Zoom</b> Product details Design guide	90 100-103
	<b>4" ProTools DLX Adjustable Round Asymmetric Cone</b> Product details Design guide	92 100-103
	<b>4" ProTools DLX Adjustable Round Asymmetric Cone - Narrow</b> Product details Design guide	94 100-103
	<b>4" ProTools DLX Adjustable Round Asymmetric Cone - Zoom</b> Product details Design guide	96 100-103

Washlights

	<b>4" ProTools DL Wall Wash Square Wall Wash</b> Product details Design guide	58 108-111
	<b>4" ProTools DL Wall Wash Round Wall Wash</b> Product details Design guide	60 108-111
















# ProTools Applications

## Downlight

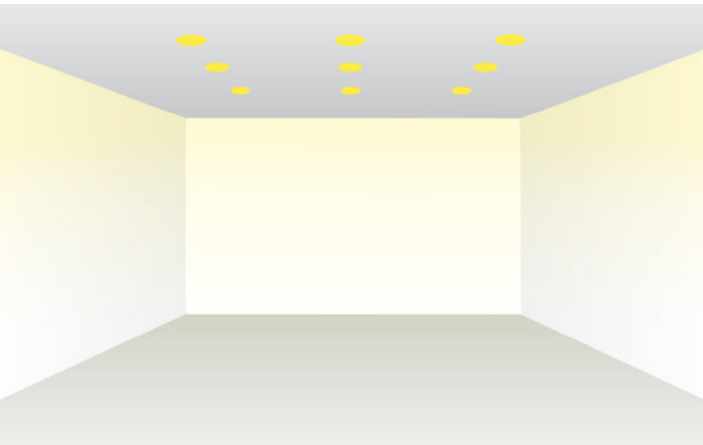

Perhaps the most common lighting solution utilized for general area lighting, arranging a group of lights in a grid to give even illumination to the surface below.

Of course, the popularity of a technique is not always a sign of best practice, and in this case it typically has more to do with economy and ease of implementation.


However, when applied to a space with some consideration it can be an effective technique. One thing to consider for this type of solution is "how much light will fall on the walls?". A space can have a lot of light being delivered into it, but if the walls are not sufficiently illuminated, there is a good chance that the space will feel gloomy, even though there is plenty of light falling on horizontal surfaces like desks or the floor.

Fortunately, many Whitegoods luminaires have good 'high angle distribution', which can help to deal with this common issue.

### Tip

Look for Whitegoods product codes that include “D”, “DL”, or “DLX” to find downlights.

## Washlight

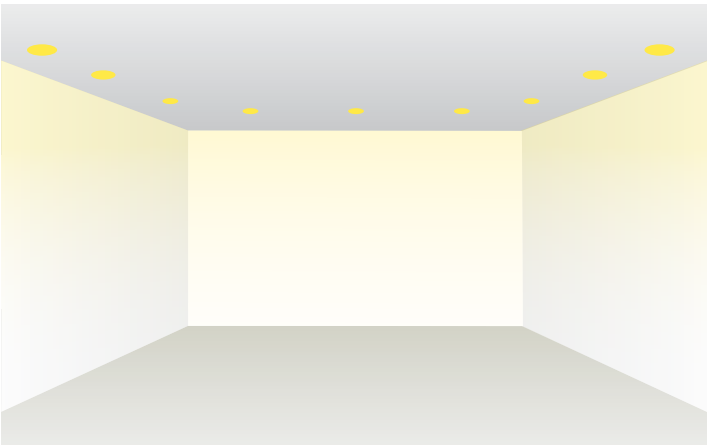


The aim of wall washing, or in fact washing any surface with light (wall, ceiling or floor), is to create an even 'wash' of light across the surface. The wall wash is a great way to introduce light into a room as the brightness of the vertical surfaces around us play a crucial role in our perception of a space. You can use linear or point sources, and both will need to emit a wide, even beam of light which is directed towards the wall, to create the effect.

Downlights need to be correctly positioned, both in terms of distance from the wall, and their relative distance to one another. There are helpful guides for this in the Design Guide section of this book. Linear sources also need careful placing in terms of their offset from the wall, and can be used in a continuous format, or as a series of linear elements. A continuous linear source will achieve the most consistent overall effect, although downlights might better suit the architecture or construction method.

### Tip

Look for Whitegoods product codes that include “WW” throughout this book to find wash lights.

## Adjustable

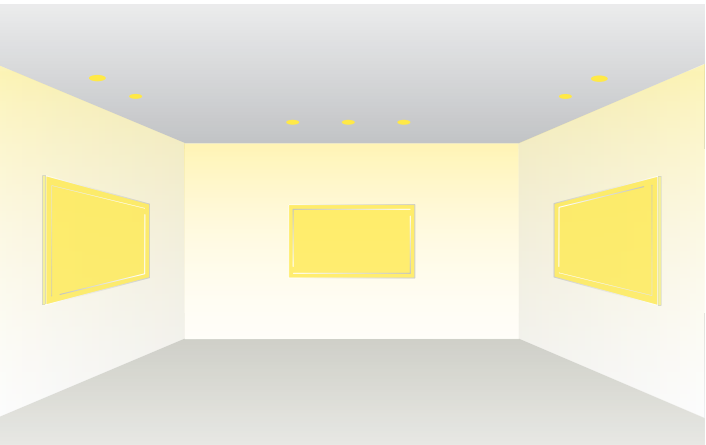

Of course, although considering whole surfaces is a highly effective way to start thinking about light within your project, it is equally possible to think in terms of specific pieces of architecture, art, sculpture, ornamentation or furniture, and treat these as focal objects, drawing the viewers attention to them naturally and simply by highlighting them against their background scenario.

A useful 'rule of thumb' here is that if you allow ten times more light to fall on an object relative to the surrounding light level, it will seem to be 'popping' out of the scene and will tend to draw the eye.

### Tip

Look for Whitegoods product codes that include “DL” or “DLX” throughout this book to find products suitable for highlighting focal objects.





# 4" ProTools D Downlight

## Square Flush Diffuser

### High-Angle Distribution Ambient Lighting

- 4" aperture square downlight for wide distribution ambient lighting.
  - High angle distribution giving good vertical illumination.
  - High transmission, evenly illuminated Flush Satin Diffuser.
- Beam Angle: Lambertian
  - Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Modular interchangeability throughout the entire ProTools range of products.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square aperture with minimal ceiling interruption and flush lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	Lambertian
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE



Recessed Plaster Trim



Recessed Bezel Trim

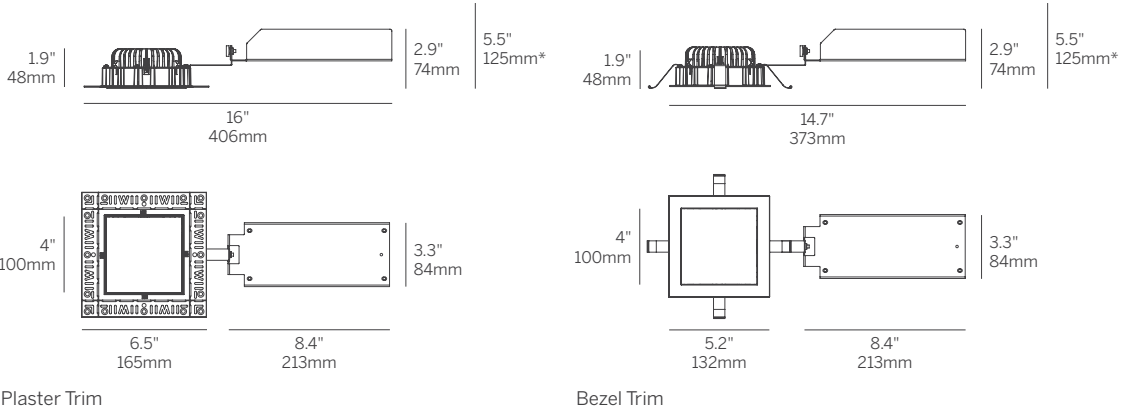

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-104

# 4" ProTools D Downlight

## Square Flush Diffuser

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Lens	Beam	Finish	Options
WG-100SPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ1 PEQ0 DFPN	FSOD	LAM	W S <sup>5</sup>	LP CP IC

- Model**

  - WG-100SPTD = 4" ProTools D Downlight
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 11W @ 350mA
  - M = Mid Power, 15W @ 500mA
  - H = High Power, 22.5W @ 700mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High Power)

  - 927 = 2700K, (850/1187/1612 lm)
  - 930 = 3000K, (875/1220/1657 lm)
  - 935 = 3500K, (922/1286/1747 lm)
  - 940 = 4000K, (972/1356/1842 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V (low and mid power only)
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)
  - DFPN = Lutron Forward Phase 1% 120VAC
- Lens**

  - FSOD = Flush Square Satin Opal Lens
- Beam**

  - LAM = Lambertian
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumens shown for WG-100SPTD-...-FSOD-LAM-W. See Page 2 of specsheet for additional details.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.





# 4" ProTools D Downlight

## Round Flush Diffuser

### High-Angle Distribution Ambient Lighting

- 4" aperture square downlight for wide distribution ambient lighting.
  - High angle distribution giving good vertical illumination.
  - High transmission, evenly illuminated Flush Satin Diffuser.
- Beam Angle: Lambertian
  - Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Modular interchangeability throughout the entire ProTools range of products.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round aperture with minimal ceiling interruption and flush lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	Lambertian
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE



Recessed Plaster Trim



Recessed Bezel Trim

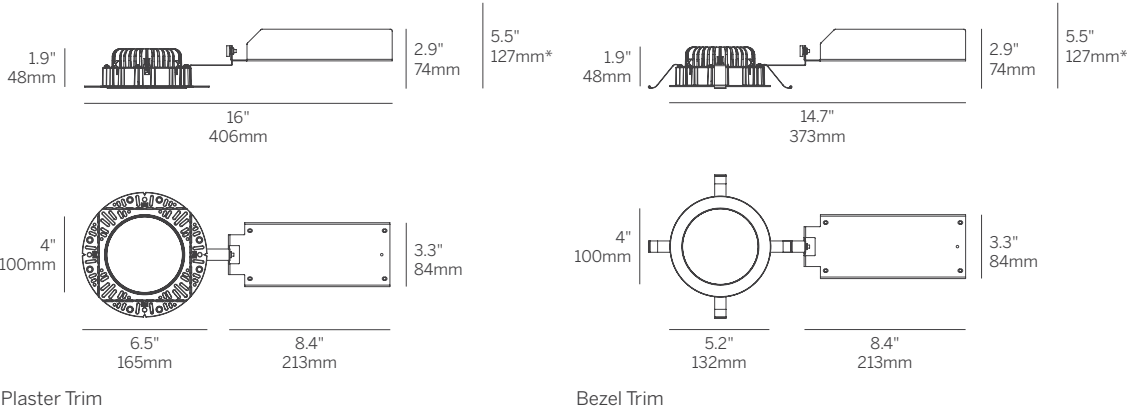

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-104

# 4" ProTools D Downlight

## Round Flush Diffuser

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Lens	Beam	Finish	Options
WG-100RPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ1 PEQ0 DFPN	FROD	LAM	W S <sup>5</sup>	LP CP IC

- Model**

  - WG-100RPTD = 4" ProTools D Downlight
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 11W @ 350mA
  - M = Mid Power, 15W @ 500mA
  - H = High Power, 22.5W @ 700mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High Power)

  - 927 = 2700K, (849/1185/1609 lm)
  - 930 = 3000K, (873/1218/1655 lm)
  - 935 = 3500K, (920/1284/1744 lm)
  - 940 = 4000K, (971/1354/1839 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V (low and mid power only)
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)
  - DFPN = Lutron Forward Phase 1% 120VAC
- Lens**

  - FROD = Flush Round Satin Opal Lens
- Beam**

  - LAM = Lambertian
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for 100RPTD-...-FROD-LAM-W. See Page 2 of specsheet for additional details.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.






# 4" ProTools D Downlight

## Square Recessed Cone

### Even Illumination From Regressed Lens

- 4" square aperture downlight with wide distribution ambient lighting.
- 0.7" regressed, evenly illuminated, highly efficient Satin Opal Diffuser providing good glare control.
- High efficiency, high transmission diffuser.
- Beam Angle: 110°
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.
- Wet Location as standard option (WL).


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square aperture with minimal ceiling interruption and recessed lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	110 degree beam spread
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

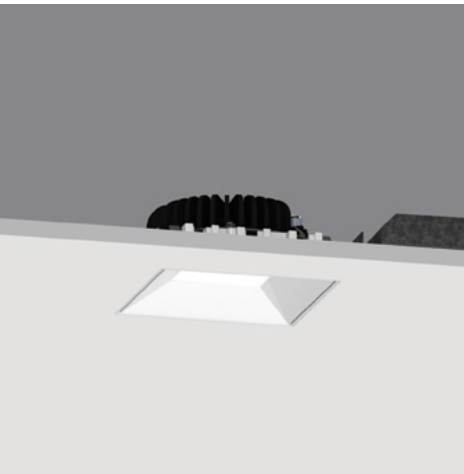

Recessed Plaster Trim



Recessed Bezel Trim

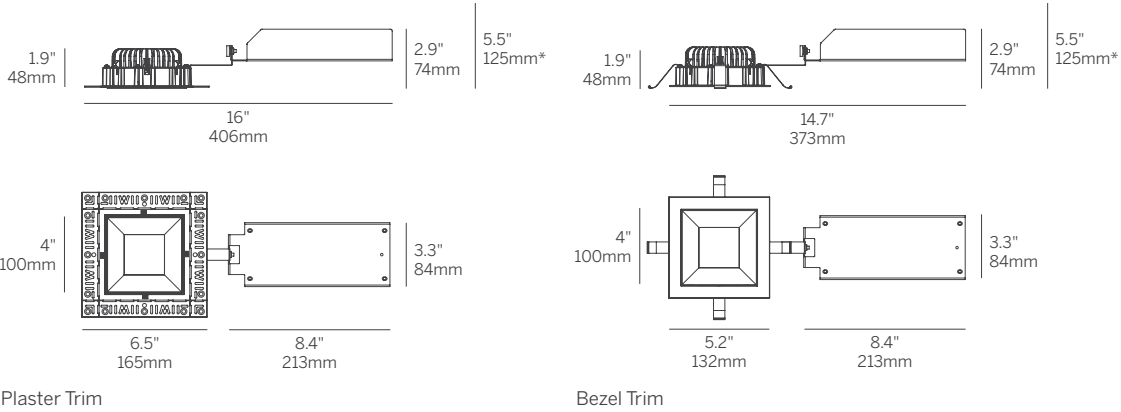

# 4" ProTools D Downlight

## Square Recessed Cone

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ1 PEQ0 DFPN	SRC	RSO	110	W S <sup>5</sup>	LP CP IC WL

- Model**
- WG-100SPTD = 4" ProTools D Downlight
- Fixation**
- RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**
- L = Low Power, 11W @ 350mA
  - M = Mid Power, 15W @ 500mA
  - H = High Power, 22.5W @ 700mA
- CRI/CCT<sup>3</sup>**
- 90+ CRI (Low/Mid/High Power)
- 927 = 2700K, (760/1060/1440 lm)
  - 930 = 3000K, (781/1090/1481 lm)
  - 935 = 3500K, (824/1149/1561 lm)
  - 940 = 4000K, (868/1212/1646 lm)
- Driver<sup>4</sup>**
- X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V (low and mid power only)
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)
  - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**
- SRC = Square Recessed Cone
- Lens**
- RSO = Satin Opal
- Beam**
- 110 = 110° Beam Angle
- Finish**
- W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumens shown fro 100SPTD-...-SRC-RSO-110-W. See Page 2 of specsheet for additional details.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.

# 4" ProTools D Downlight

## Round Recessed Cone

### Even Illumination From Regressed Lens

- 4" round aperture downlight with wide distribution ambient lighting.
  - 0.7" regressed, evenly illuminated, highly efficient Satin Opal Diffuser providing good glare control.
  - High efficiency, high transmission diffuser.
  - Beam Angle: 110°
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Wet Location as standard option (WL).


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round aperture with minimal ceiling interruption and recessed lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	110 degree beam spread
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated



Recessed Plaster Trim



Recessed Bezel Trim

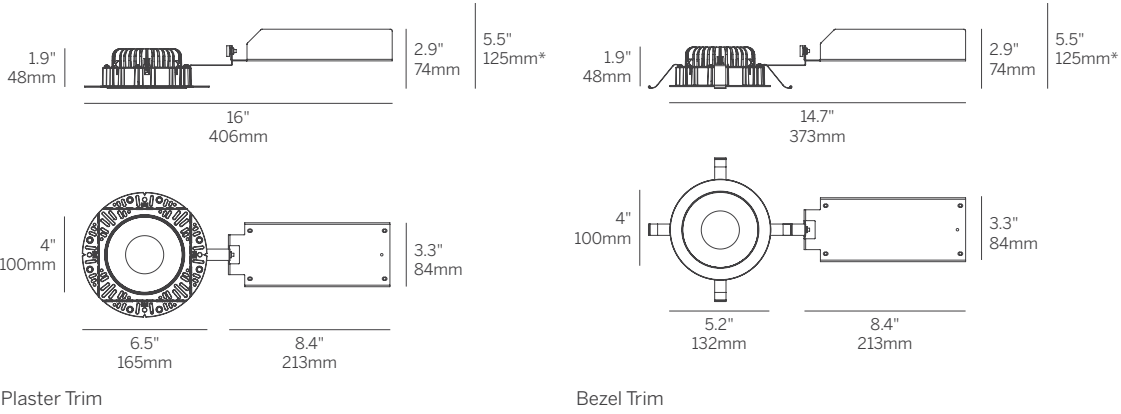

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.

# 4" ProTools D Downlight

## Round Recessed Cone

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ1 PEQ0 DFPN	RRC	RSO	110	W S <sup>5</sup>	LP CP IC WL

- Model**

  - WG-100RPTD = 4" ProTools D Downlight
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 11W @ 350mA
  - M = Mid Power, 15W @ 500mA
  - H = High Power, 22.5W @ 700mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High Power)

  - 927 = 2700K, (700/976/1326 lm)
  - 930 = 3000K, (719/1004/1364 lm)
  - 935 = 3500K, (758/1058/1437 lm)
  - 940 = 4000K, (800/1116/1516 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EidoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V (low and mid power only)
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)
  - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**

  - RRC = Round Recessed Cone
- Lens**

  - RSO = Satin Opal
- Beam**

  - 110 = 110° Beam Angle
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for 100RPTD-...-RRC-RSO-110-W. See Page 2 of specsheet for additional details.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.

# 4" ProTools D Downlight

## Square Regressed Pinhole

### Even Illumination From Regressed Lens

- 4" square aperture downlight with wide distribution ambient lighting.
- 0.7" regressed, evenly illuminated, highly efficient Satin Opal Diffuser providing good glare control.
- High efficiency, high transmission diffuser.
- Beam Angle: 110°
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square regressed pinhole with minimal ceiling interruption and satin opal lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	110 degree beam spread
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE



Recessed Plaster Trim



Recessed Bezel Trim

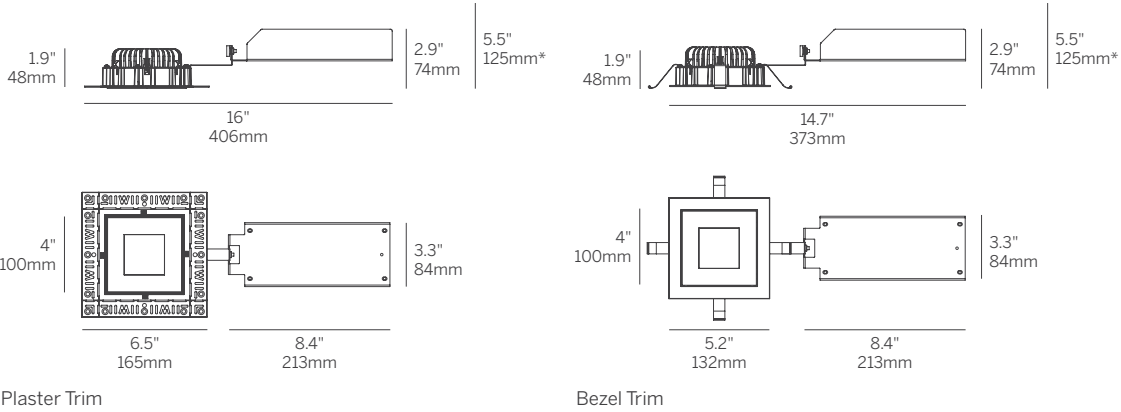

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.

# 4" ProTools D Downlight

## Square Regressed Pinhole

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ1 PEQ0 DFPN	SRP	RSO	110	W S <sup>5</sup>	LP CP IC

### Model

- WG-100SPTD = 4" ProTools D Downlight

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

### Power<sup>1,2</sup>

- L = Low Power, 11W @ 350mA
- M = Mid Power, 15W @ 500mA
- H = High Power, 22.5W @ 700mA

### CRI/CCT<sup>3</sup>

- 90+ CRI (Low/Mid/High Power)
- 927 = 2700K, (741/1034/1405 lm)
- 930 = 3000K, (762/1064/1445 lm)
- 935 = 3500K, (803/1121/1523 lm)
- 940 = 4000K, (847/1182/1606 lm)

### Driver<sup>4</sup>

- X = Remote driver, ordered separately
- S = Standard non-dim driver, 120-277V
- D010 = EldoLED, 1%, 0-10V Driver, 120-277V
- PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V (low and mid power only)
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)
- DFPN = Lutron Forward Phase 1% 120VAC

### Cover

- SRP = Square Regressed Pinhole

### Lens

- RSO = Satin Opal

### Beam

- 110 = 110° Beam Angle

### Finish

- W = White, 15% gloss, RAL9003 (standard)
- S = Silver, 15% gloss<sup>5</sup>

### Options

ProTools downlights require no additional options kits for remodel & new construction

- LP = Landing Pan
- CP = Chicago Plenum Housing
- IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

### Notes

- 1 Other lumen packages available, consult factory.
- 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 3 Delivered lumen data shown for 100SPTD-...-SRP-RSO-110-W. See Page 2 of specsheet for additional details.
- 4 See power supply page for details.
- 5 Plaster trim version includes white frame and silver cover.



# 4" ProTools D Downlight

## Round Regressed Pinhole

### Even Illumination From Regressed Lens

- 4" round aperture downlight with wide distribution ambient lighting.
- 0.7" regressed, evenly illuminated, highly efficient Satin Opal Diffuser providing good glare control.
- High efficiency, high transmission diffuser.
- Beam Angle: 110°
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round regressed pinhole with minimal ceiling interruption and satin opal lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	110 degree beam spread
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE



Recessed Plaster Trim



Recessed Bezel Trim

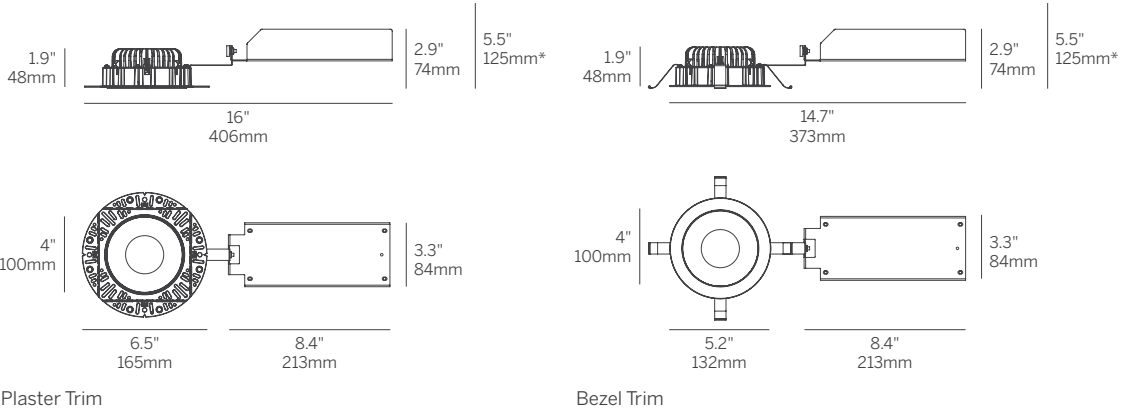

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.

# 4" ProTools D Downlight

## Round Regressed Pinhole

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ1 PEQ0 DFPN	RRP	RSO	110	W S <sup>5</sup>	LP CP IC

- Model**

  - WG-100SRTD = 4" ProTools D Downlight
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 11W @ 350mA
  - M = Mid Power, 15W @ 500mA
  - H = High Power, 22.5W @ 700mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High Power)

  - 927 = 2700K, (657/916/1245 lm)
  - 930 = 3000K, (675/942/1280 lm)
  - 935 = 3500K, (712/993/1349 lm)
  - 940 = 4000K, (751/1047/1423 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V (low and mid power only)
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)
  - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**

  - RRP = Round Regressed Pinhole
- Lens**

  - RSO = Satin Opal
- Beam**

  - 110 = 110° Beam Angle
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumens shown for 100RPTD-...RRP-RSO-110-W. See Page 2 of specsheet for additional details..
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.

# 4" ProTools DL Downlight

## Square Recessed Cone

### Multiple Beam Options From Recessed Source


- 4" square downlight with 2" light aperture.
  - 0.7" regressed aperture / lens position provides good glare control.
  - Beam Angle: Various, Cut Off: 55°.
  - Open aperture, clear lens or high transmission diffuser.
  - Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Wet Location as standard option (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32, 41 and 65 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility

Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations

Warranty	5-year Limited (see complete company warranty information)
----------	--


Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated
----------------	---

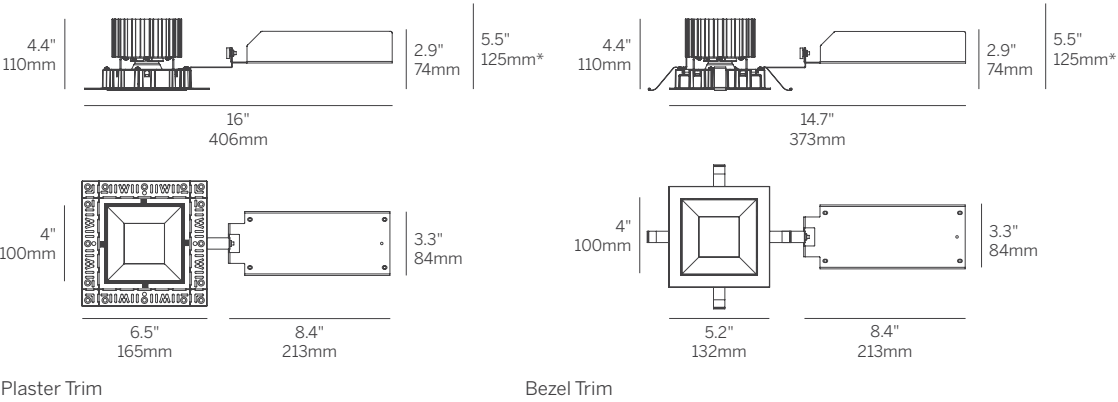


\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

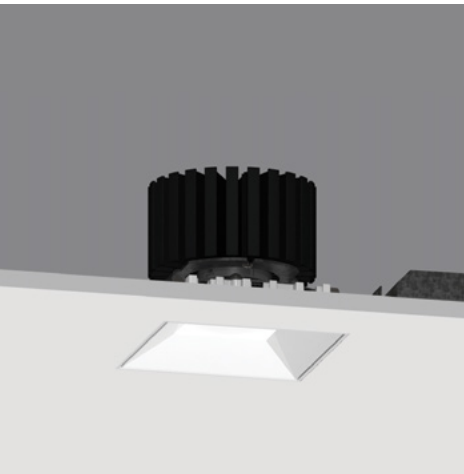

Recessed Plaster Trim

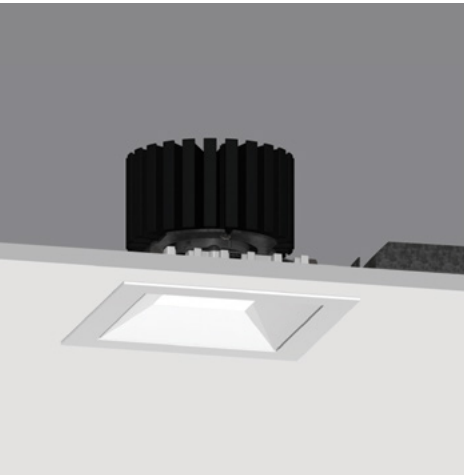

Recessed Bezel Trim

# 4" ProTools DL Downlight

## Square Recessed Cone

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options <sup>5</sup>
WG-100SPTDLF	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SRC	OA MPL RSC	16 32 41 65	W S <sup>5</sup>	LP CP IC WL

- Model**

  - WG-100SPTDLF = 4" ProTools DL Downlight
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (552/766/1031/1445 lm)
  - 930 = 3000K, (594/824/1110/1555 lm)
  - 935 = 3500K, (594/824/1110/1555 lm)
  - 940 = 4000K, (636/883/1188/1664 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (Warm Dimming), 120-277V
- Cover**

  - SRC = Square Recessed Cone
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 16 = 16° Beam Angle
  - 32 = 32° Beam Angle
  - 41 = 41° Beam Angle
  - 65 = 65° Beam Angle
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options<sup>6</sup>**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location (not available with open aperture)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown fro WG-100RPTDLF-...-SRC-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.
  - 6 To specify multiple options, select the appropriate grouped codes from the dropdown e.g. LP-WL.





# 4" ProTools DL Downlight

## Round Recessed Cone

### Multiple Beam Options From Recessed Source


- 4" round downlight with 2" light aperture.
- 0.7" regressed aperture / lens position provides good glare control.
- Beam Angle: Various, Cut Off: 50°.
- Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Wet Location as standard option (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32, 41 and 65 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility

Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations

Warranty	5-year Limited (see complete company warranty information)
----------	--

Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated
----------------	---

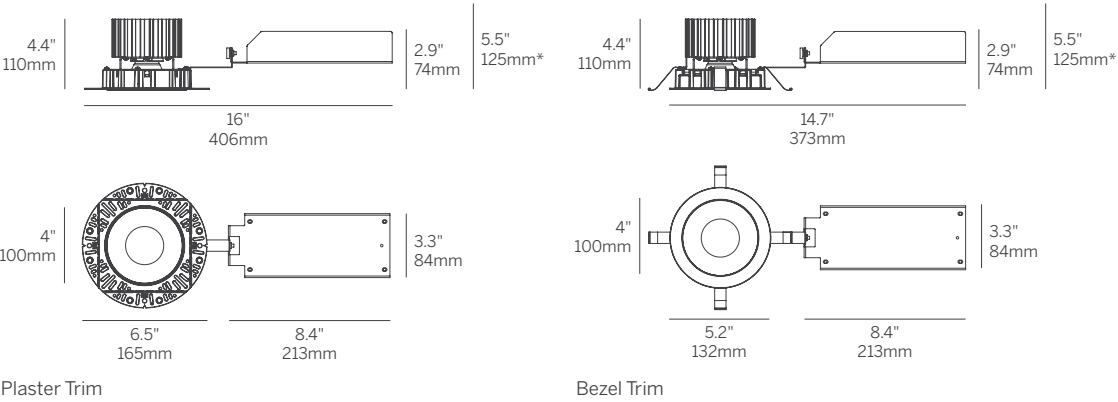

Recessed Plaster Trim



Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DL Downlight

## Round Recessed Cone

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options <sup>5</sup>
WG-100RPTDLF	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RRC	OA MPL RSC	16 32 41 65	W S <sup>5</sup>	LP CP IC WL

- Model**
- WG-100RPTDLF = 4" ProTools DL Downlight

- Fixation**
- RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim

- Power<sup>1,2</sup>**
- L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA

- CRI/CCT<sup>3</sup>**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (492/683/919/1287 lm)
  - 930 = 3000K, (529/734/989/1385 lm)
  - 935 = 3500K, (529/734/989/1385 lm)
  - 940 = 4000K, (567/786/1058/1483 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)

- Driver<sup>4</sup>**
- X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (Warm Dimming), 120-277V

- Cover**
- RRC = Round Recessed Cone

- Lens**
- OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear

- Beam**
- 16 = 16° Beam Angle
  - 32 = 32° Beam Angle
  - 41 = 41° Beam Angle
  - 65 = 65° Beam Angle

- Finish**
- W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>

- Options<sup>6</sup>**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location (not available with open aperture)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown fro WG-100RPTDLF-...-SRC-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.
  - 6 To specify multiple options, select the appropriate grouped codes from the dropdown e.g. LP-WL.




# 4" ProTools DL Downlight

## Square Regressed Pinhole

### Multiple Beam Options From Regressed Source

- 4" square downlight with 2" light aperture.
  - 1/2" regressed aperture / lens position provides good glare control.
  - Beam Angle: Various, Cut Off: 55°.
  - Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32, 41 and 65 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

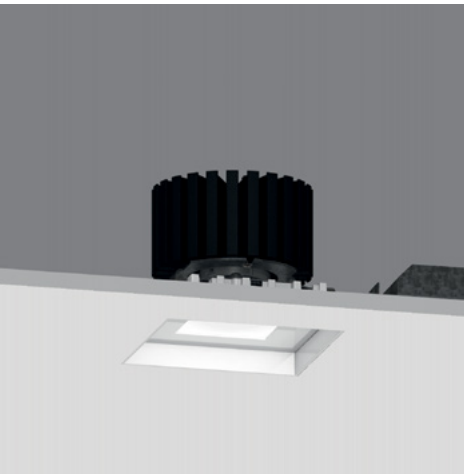

Recessed Plaster Trim



Recessed Bezel Trim

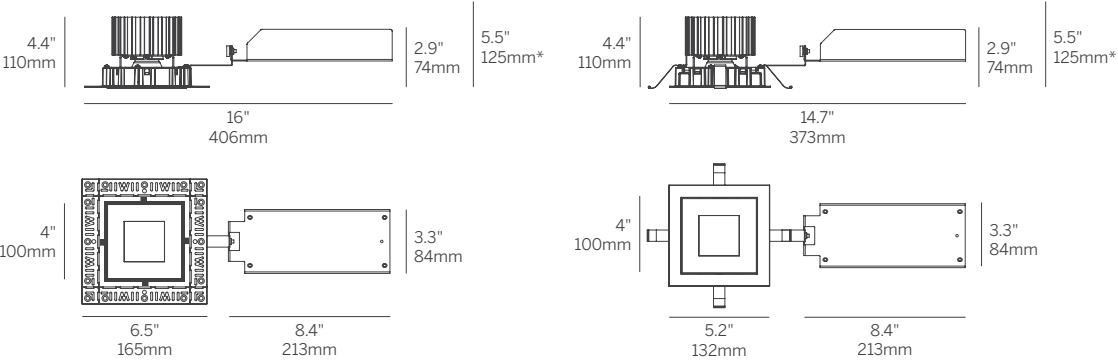

Plaster Trim

Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DL Downlight

## Square Regressed Pinhole

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLF	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SRP	OA MPL RSC	16 32 41 65	W S <sup>5</sup>	LP CP IC

Model	Cover
■ WG-100SPTDLF = 4" ProTools DL Downlight	■ SRP = Square Regressed Pinhole
Fixation	Lens
■ RPT = Recessed Plaster Trim	■ OA = Open Aperture
■ RBT = Recessed Bezel Trim	■ MPL = Micro-prismatic Lens
	■ RSC = Satin Clear
Power <sup>1,2</sup>	Beam
■ L = Low Power, 5.7W @ 350mA	■ 16 = 16° Beam Angle
■ M = Mid Power, 8.4W @ 500mA	■ 32 = 32° Beam Angle
■ H = High Power, 12W @ 700mA	■ 41 = 41° Beam Angle
■ XH = Extra High Power, 17.8W @ 1050mA	■ 65 = 65° Beam Angle
■ TW = 9W @ 500mA	
■ WD = 0.4 - 11.8W @ 350mA	
CRI/CCT <sup>3</sup>	Finish
90+ CRI (Low/Mid/High/Extra High)	■ W = White, 15% gloss, RAL9003 (standard)
■ 927 = 2700K, (494/686/923/1293 lm)	■ S = Silver, 15% gloss <sup>5</sup>
■ 930 = 3000K, (532/738/ 993/1391 lm)	
■ 935 = 3500K, (532/738/993/1391 lm)	Options
■ 940 = 4000K, (569/790/1063/1489 lm)	ProTools downlights require no additional options kits for remodel & new construction
■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm)	■ LP = Landing Pan
■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)	■ CP = Chicago Plenum Housing
	■ IC = IC/NC Housing
Driver <sup>4</sup>	
■ X = Remote driver, ordered separately	
■ S = Standard non-dim driver, 120-277V	
■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V	
■ PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V	
■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V	
■ DFPN = Lutron Forward Phase 1% 120VAC	
■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V	
■ WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V	

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100RPTDLF-...-SRP-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.





# 4" ProTools DL Downlight

## Round Regressed Pinhole

### Multiple Beam Options From Regressed Source

- 4" round downlight with 2" light aperture.
  - 1/2" regressed aperture / lens position provides good glare control.
  - Beam Angle: Various, Cut Off: 55°.
  - Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.

**Housing** Die-caste aluminum for precision fit and heat dissipation  
Mounting hardware for all ceiling types; trim and trimless  
EZ clip mounting for secure installation  
Snap-in cover  
Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings

**Covers** Round regressed pinhole - smallest apperture, maximum glare control

**LED** 90+ CRI  
Low/Mid/High/Extra High output choices  
2700K, 3000K, 3500K, 4000K  
Tuneable White from 1800K - 4000K  
Warm Dim from 1800 - 3000K


**Beam** 16, 32, 41 and 65 degree beam spreads

**Driver** Integral and remote drivers for all dimming and non-dimming applications  
Through-wire integral driver enclosure installed from below without the need for bulky housing  
POE driver compatibility

**Installation** Not required when using the Driver Enclosure  
**Housing** Optional: IC and Chicago plenum  
Optional: new construction (with j-box and driver attached)  
Optional: Landing pan for use with Driver Enclosure to locate cut-out locations

**Warranty** 5-year Limited (see complete company warranty information)


**Certifications** ETL and ETL-C for dry and damp location, CE

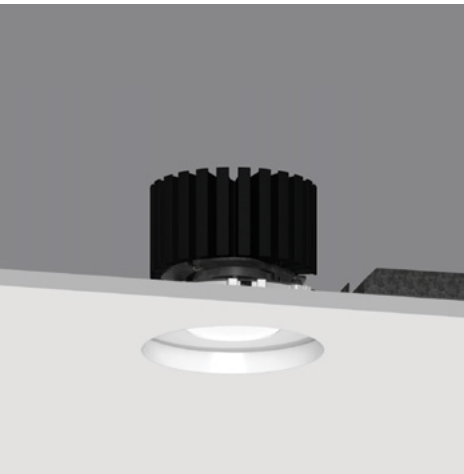

Recessed Plaster Trim



Recessed Bezel Trim

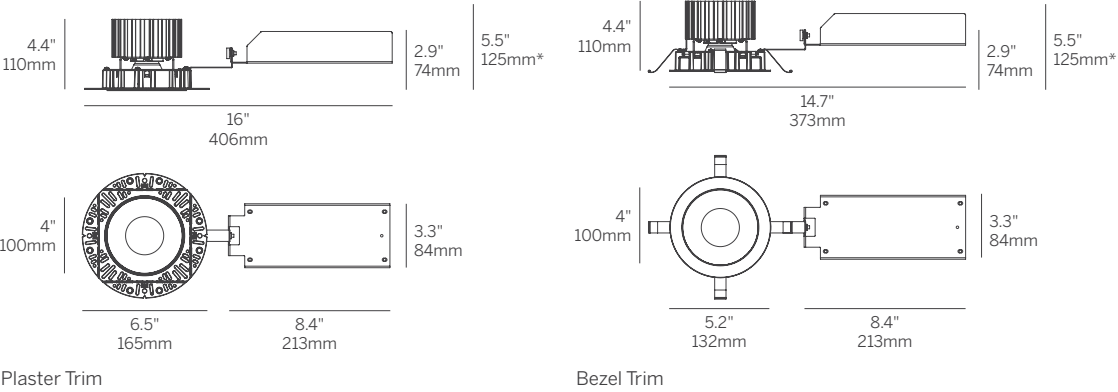

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DL Downlight

## Round Regressed Pinhole

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLF	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RRP	OA MPL RSC	16 32 41 65	W S <sup>5</sup>	LP CP IC

### Model

- WG-100RPTDLF = 4" ProTools DL Downlight

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

### Power<sup>1,2</sup>

- L = Low Power, 5.7W @ 350mA
- M = Mid Power, 8.4W @ 500mA
- H = High Power, 12W @ 700mA
- XH = Extra High Power, 17.8W @ 1050mA
- TW = 9W @ 500mA
- WD = 0.4 - 11.8W @ 350mA

### CRI/CCT<sup>3</sup>

- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (492/683/919/1287 lm)
  - 930 = 3000K, (529/734/989/1385 lm)
  - 935 = 3500K, (529/734/989/1385 lm)
  - 940 = 4000K, (567/786/1058/1483 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)

### Driver<sup>4</sup>

- X = Remote driver, ordered separately
- S = Standard non-dim driver, 120-277V
- D010 = EldoLED, 1%, 0-10V Driver, 120-277V
- PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC
- TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V

### Cover

- RRP = Round Regressed Pinhole

### Lens

- OA = Open Aperture
- MPL = Micro-prismatic Lens
- RSC = Satin Clear

### Beam

- 16 = 16° Beam Angle
- 32 = 32° Beam Angle
- 41 = 41° Beam Angle
- 65 = 65° Beam Angle

### Finish

- W = White, 15% gloss, RAL9003 (standard)
- S = Silver, 15% gloss<sup>5</sup>

### Options

ProTools downlights require no additional options kits for remodel & new construction

- LP = Landing Pan
- CP = Chicago Plenum Housing
- IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

### Notes

- 1 Other lumen packages available, consult factory.
- 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 3 Delivered lumen data shown for WG-100RPTDLF -...-RRP-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
- 4 See power supply page for details.
- 5 Plaster trim version includes white frame and silver cover.





# 4" ProTools DL Adjustable Square Recessed Cone

## Multiple Beam Options With Pan And Tilt Adjustment From Regressed Source

- 4" square downlight with 2" light aperture.
- 0.7" regressed aperture / lens position provides good glare control.
- Beam Angle: Various, Cut Off: 35°.
- Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 40°, rotation 365°, 144 step.
- Wet Location as standard option (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

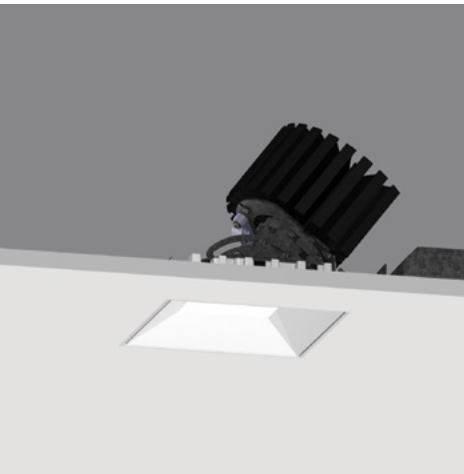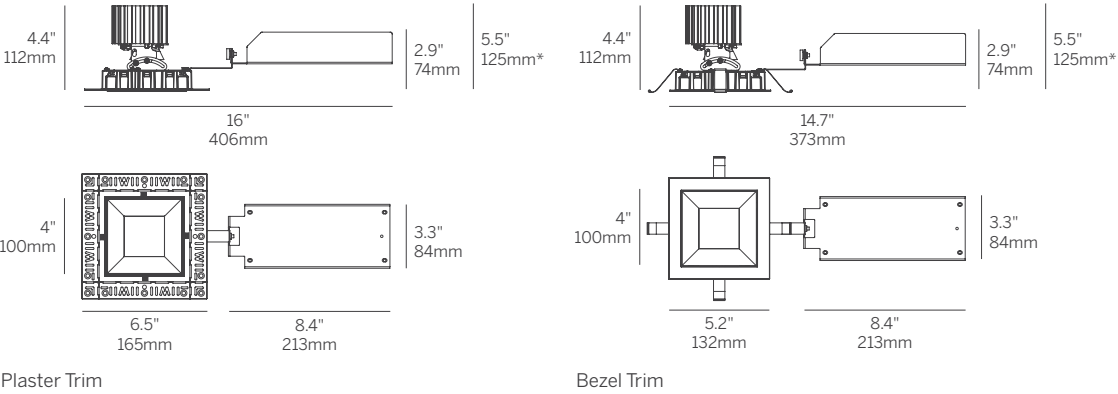

Recessed Plaster Trim



Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DL Adjustable Square Recessed Cone

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLA	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SRC	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC WL

Model	■ WG-100SPTDLA = 4" ProTools DL Ajustable	Cover	■ SRC = Square Recessed Cone
Fixation	■ RPT = Recessed Plaster Trim ■ RBT = Recessed Bezel Trim	Lens	■ OA = Open Aperture ■ MPL = Micro-prismatic Lens ■ RSC = Satin Clear
Power <sup>1,2</sup>	■ L = Low Power, 5.7W @ 350mA ■ M = Mid Power, 8.4W @ 500mA ■ H = High Power, 12W @ 700mA ■ XH = Extra High Power, 17.8W @ 1050mA ■ TW = 9W @ 500mA ■ WD = 0.4 - 11.8W @ 350mA	Beam	■ 16 = 16° Beam Angle ■ 32 = 32° Beam Angle ■ 41 = 41° Beam Angle
CRI/CCT <sup>3</sup>	90+ CRI (Low/Mid/High/Extra High) ■ 927 = 2700K, (552/766/1031/1445 lm) ■ 930 = 3000K, (594/824/1110/1555 lm) ■ 935 = 3500K, (594/824/1110/1555 lm) ■ 940 = 4000K, (636/883/1188/1664 lm) ■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm) ■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)	Finish	■ W = White, 15% gloss, RAL9003 (standard) ■ S = Silver, 15% gloss <sup>5</sup>
Driver <sup>4</sup>	■ X = Remote driver, ordered separately ■ S = Standard non-dim driver, 120-277V ■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V ■ PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V ■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V ■ DFPN = Lutron Forward Phase 1% 120VAC ■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V ■ WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V	Options	ProTools downlights require no additional options kits for remodel & new construction ■ LP = Landing Pan ■ CP = Chicago Plenum Housing ■ IC = IC/NC Housing ■ WL = Wet Location (not available with open aperture)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100SPTDLA-....-SRC-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.






# 4" ProTools DL Adjustable Round Recessed Cone

## Multiple Beam Options With Pan And Tilt Adjustment From Regressed Source

- 4" round downlight with 2" light aperture.
- 0.7" regressed aperture / lens position provides good glare control.
- Beam Angle: Various, Cut Off: 35°.
- Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 40°, rotation 365°, 144 step.
- Wet Location as standard option (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

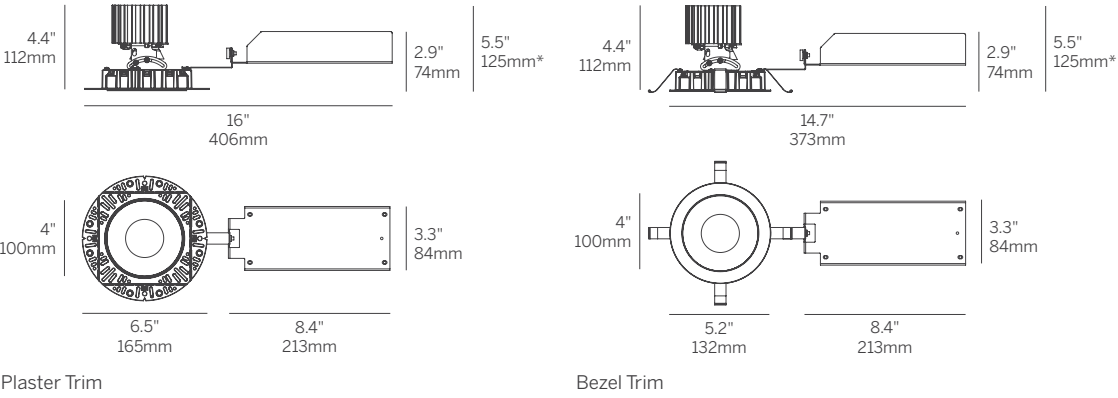

Recessed Plaster Trim



Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DL Adjustable Round Recessed Cone

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLA	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RRC	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC WL

Model	■ WG-100SPTDLA = 4" ProTools DL Adjustable	Cover	■ RRC = Round Recessed Cone
Fixation	■ RPT = Recessed Plaster Trim ■ RBT = Recessed Bezel Trim	Lens	■ OA = Open Aperture ■ MPL = Micro-prismatic Lens ■ RSC = Satin Clear
Power <sup>1,2</sup>	■ L = Low Power, 5.7W @ 350mA ■ M = Mid Power, 8.4W @ 500mA ■ H = High Power, 12W @ 700mA ■ XH = Extra High Power, 17.8W @ 1050mA ■ TW = 9W @ 500mA ■ WD = 0.4 - 11.8W @ 350mA	Beam	■ 16 = 16° Beam Angle ■ 32 = 32° Beam Angle ■ 41 = 41° Beam Angle
CRI/CCT <sup>3</sup>	90+ CRI (Low/Mid/High/Extra High) ■ 927 = 2700K, (492/683/919/1287 lm) ■ 930 = 3000K, (529/734/989/1385 lm) ■ 935 = 3500K, (529/734/989/1385 lm) ■ 940 = 4000K, (567/786/1058/1483 lm) ■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm) ■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)	Finish	■ W = White, 15% gloss, RAL9003 (standard) ■ S = Silver, 15% gloss <sup>5</sup>
Driver <sup>4</sup>	■ X = Remote driver, ordered separately ■ S = Standard non-dim driver, 120-277V ■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V ■ PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V ■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V ■ DFPN = Lutron Forward Phase 1% 120VAC ■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V ■ WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V	Options	ProTools downlights require no additional options kits for remodel & new construction ■ LP = Landing Pan ■ CP = Chicago Plenum Housing ■ IC = IC/NC Housing ■ WL = Wet Location (not available with open aperture)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100RPTDLA-...-RRC-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.





# 4" ProTools DL Adjustable Square Regressed Pinhole


## Multiple Beam Options With Pan And Tilt Adjustment From Regressed Source

- 4" square downlight with 2" light aperture.
  - 1/2" regressed aperture / lens position provides good glare control.
  - Beam Angle: Various, Cut Off: 35°.
  - Open aperture, clear lens or high transmission diffuser.
  - Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 40°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

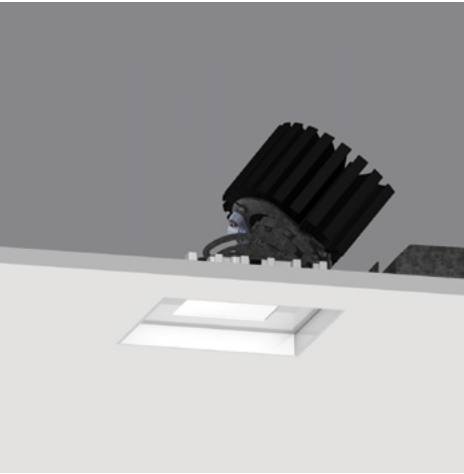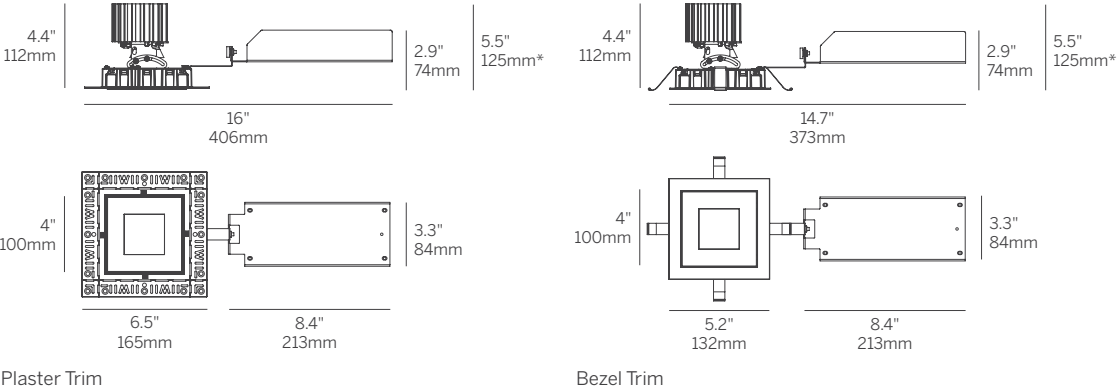

Recessed Plaster Trim

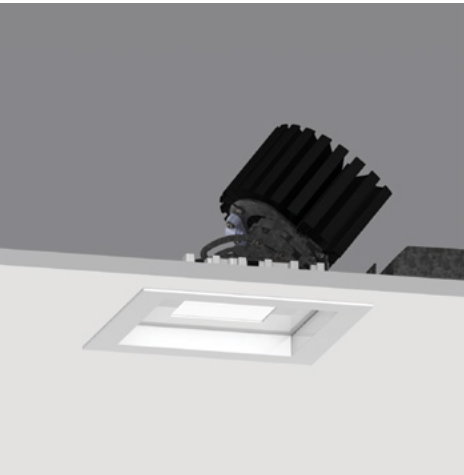

Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DL Adjustable Square Regressed Pinhole

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLA	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SRP	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC

- Model**

  - WG-100SPTDLA = 4" ProTools DL Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (494/686/923/1293 lm)
  - 930 = 3000K, (532/738/993/1391 lm)
  - 935 = 3500K, (532/738/993/1391 lm)
  - 940 = 4000K, (569/790/1063/1489 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V
- Cover**

  - SRP = Square Regressed Pinhole
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 16 = 16° Beam Angle
  - 32 = 32° Beam Angle
  - 41 = 41° Beam Angle
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-00SPTDLA-...-SRP-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.






# 4" ProTools DL Adjustable Round Regressed Pinhole

## Multiple Beam Options With Pan And Tilt Adjustment From Regressed Source

- 4" round downlight with 2" light aperture.
- 1/2" regressed aperture / lens position provides good glare control.
- Beam Angle: Various, Cut Off: 35°.
- Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 40°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

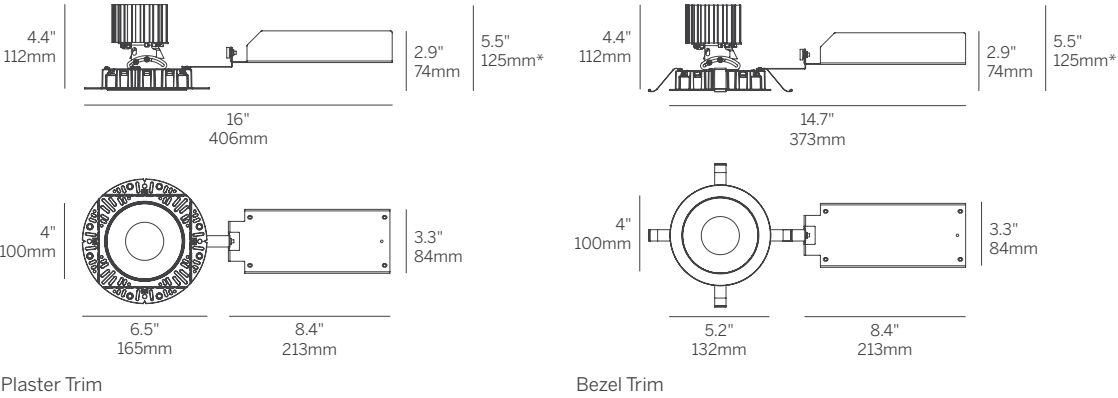

Recessed Plaster Trim



Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide 100-103

# 4" ProTools DL Adjustable Round Regressed Pinhole

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLA	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RRP	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC

Model	■ WG-100RPTDLA = 4" ProTools DL Adjustable	Cover	■ RRP = Round Regressed Pinhole
Fixation	■ RPT = Recessed Plaster Trim ■ RBT = Recessed Bezel Trim	Lens	■ OA = Open Aperture ■ MPL = Micro-prismatic Lens ■ RSC = Satin Clear
Power <sup>1,2</sup>	■ L = Low Power, 5.7W @ 350mA ■ M = Mid Power, 8.4W @ 500mA ■ H = High Power, 12W @ 700mA ■ XH = Extra High Power, 17.8W @ 1050mA ■ TW = 9W @ 500mA ■ WD = 0.4 - 11.8W @ 350mA	Beam	■ 16 = 16° Beam Angle ■ 32 = 32° Beam Angle ■ 41 = 41° Beam Angle
CRI/CCT <sup>3</sup>	90+ CRI (Low/Mid/High/Extra High) ■ 927 = 2700K, (492/683/919/1287 lm) ■ 930 = 3000K, (529/734/989/1385 lm) ■ 935 = 3500K, (529/734/989/1385 lm) ■ 940 = 4000K, (567/786/1058/1483 lm) ■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm) ■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)	Finish	■ W = White, 15% gloss, RAL9003 (standard) ■ S = Silver, 15% gloss <sup>5</sup>
Driver <sup>4</sup>	■ X = Remote driver, ordered separately ■ S = Standard non-dim driver, 120-277V ■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V ■ PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V ■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V ■ DFPN = Lutron Forward Phase 1% 120VAC ■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V ■ WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V	Options	ProTools downlights require no additional options kits for remodel & new construction ■ LP = Landing Pan ■ CP = Chicago Plenum Housing ■ IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100RPTDLA-...-RRP-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.





# 4" ProTools DL Adjustable Square Asymmetric Cone


Asymmetric Cover For Minimum Beam Clipping  
With Wider Angle Optics And Higher Angle Focusing

- 4" square downlight with 2" light aperture.
- 0.7 regressed aperture / lens position provides good glare control.
- Beam Angle: Various
- Asymmetric cover to minimize beam clipping when tilted.
- Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 40°, rotation 365°, 144 step.
- Wet Location as standard option (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

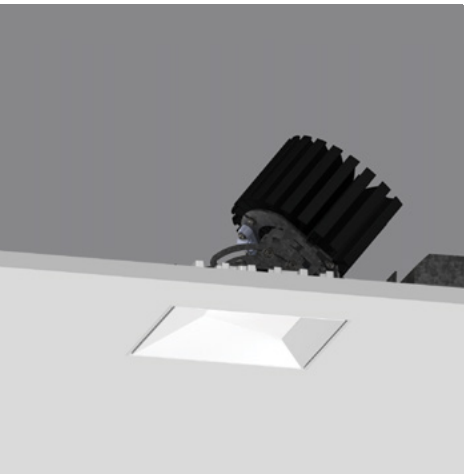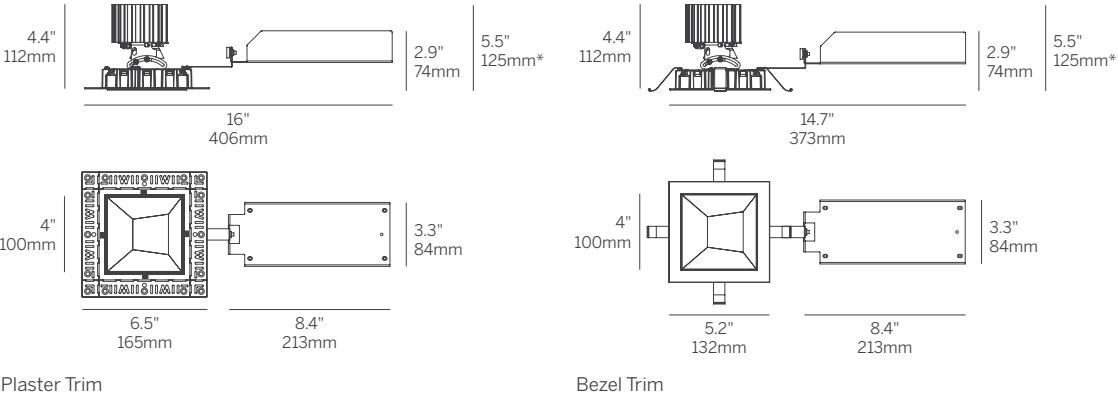

Recessed Plaster Trim

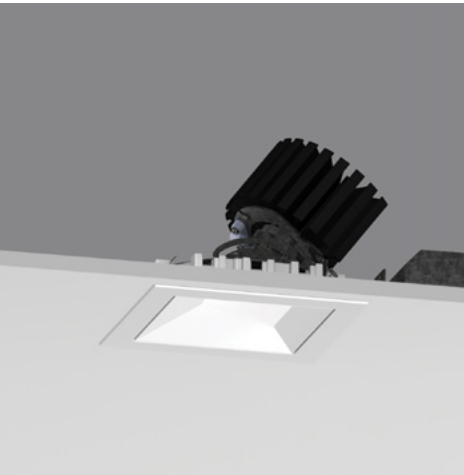

Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DL Adjustable Square Asymmetric Cover

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLA	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SAC	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC WL

<b>Model</b> <ul style="list-style-type: none"><li>■ WG-100SPTDLA = 4" ProTools DL Adjustable</li></ul>	<b>Cover</b> <ul style="list-style-type: none"><li>■ SAC = Square Asymmetric Cone</li></ul>
<b>Fixation</b> <ul style="list-style-type: none"><li>■ RPT = Recessed Plaster Trim</li><li>■ RBT = Recessed Bezel Trim</li></ul>	<b>Lens</b> <ul style="list-style-type: none"><li>■ OA = Open Aperture</li><li>■ MPL = Micro-prismatic Lens</li><li>■ RSC = Satin Clear</li></ul>
<b>Power<sup>1,2</sup></b> <ul style="list-style-type: none"><li>■ L = Low Power, 5.7W @ 350mA</li><li>■ M = Mid Power, 8.4W @ 500mA</li><li>■ H = High Power, 12W @ 700mA</li><li>■ XH = Extra High Power, 17.8W @ 1050mA</li><li>■ TW = 9W @ 500mA</li><li>■ WD = 0.4 - 11.8W @ 350mA</li></ul>	<b>Beam</b> <ul style="list-style-type: none"><li>■ 16 = 16° Beam Angle</li><li>■ 32 = 32° Beam Angle</li><li>■ 41 = 41° Beam Angle</li></ul>
<b>CRI/CCT<sup>3</sup></b> <p>90+ CRI (Low/Mid/High/Extra High)</p> <ul style="list-style-type: none"><li>■ 927 = 2700K, (447/620/834/1169 lm)</li><li>■ 930 = 3000K, (481/667/898/1258 lm)</li><li>■ 935 = 3500K, (481/667/898/1258 lm)</li><li>■ 940 = 4000K, (515/714/961/1347 lm)</li><li>■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm)</li><li>■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)</li></ul>	<b>Finish</b> <ul style="list-style-type: none"><li>■ W = White, 15% gloss, RAL9003 (standard)</li><li>■ S = Silver, 15% gloss<sup>5</sup></li></ul>
<b>Driver<sup>4</sup></b> <ul style="list-style-type: none"><li>■ X = Remote driver, ordered separately</li><li>■ S = Standard non-dim driver, 120-277V</li><li>■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V</li><li>■ PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V</li><li>■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V</li><li>■ DFPN = Lutron Forward Phase 1% 120VAC</li><li>■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V</li><li>■ WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V</li></ul>	<b>Options</b> <p>ProTools downlights require no additional options kits for remodel &amp; new construction</p> <ul style="list-style-type: none"><li>■ LP = Landing Pan</li><li>■ CP = Chicago Plenum Housing</li><li>■ IC = IC/NC Housing</li><li>■ WL = Wet Location (not available with open aperture)</li></ul>

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100SPTDLA-...-SAC-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.






# 4" ProTools DL Adjustable Round Asymmetric Cone


Asymmetric Cover For Minimum Beam Clipping  
With Wider Angle Optics And Higher Angle Focusing

- 4" round downlight with 2" light aperture.
  - 0.7" regressed aperture / lens position provides good glare control.
  - Beam Angle: Various
  - Asymmetric cover to minimize beam clipping when tilted.
  - Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 40°, rotation 365°, 144 step.
  - Wet Location as standard option (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

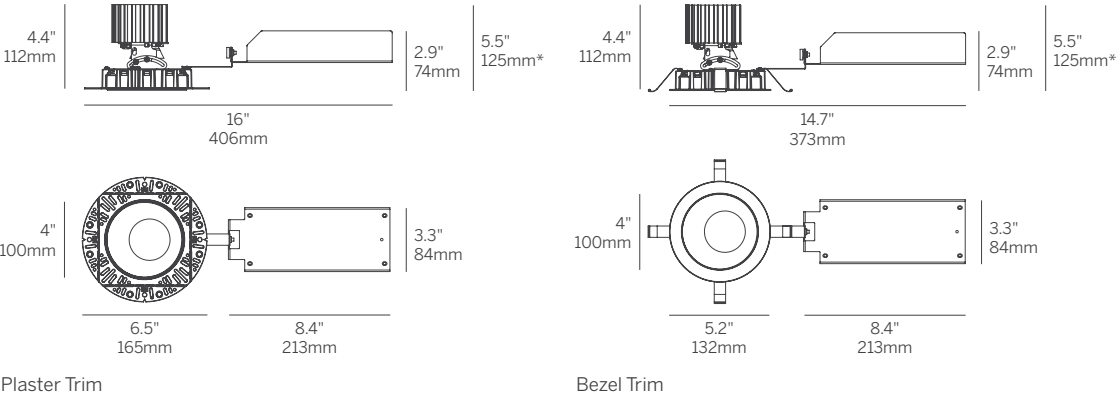

Recessed Plaster Trim

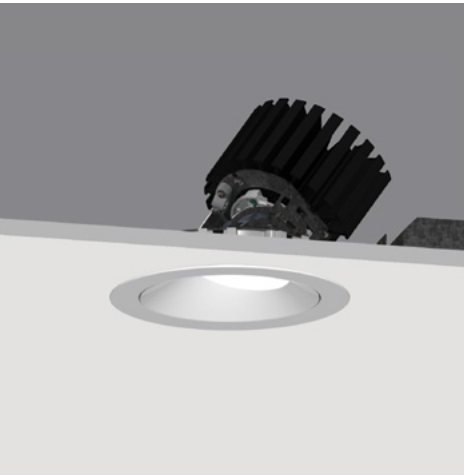

Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DL Adjustable Round Asymmetric Cone

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLA	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RAC	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC WL

- Model**

  - WG-100RPTDLA = 4" ProTools DL Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (501/695/936/1311 lm)
  - 930 = 3000K, (539/748/1007/1410 lm)
  - 935 = 3500K, (539/748/1007/1410 lm)
  - 940 = 4000K, (577/801/1078/1510 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V
- Cover**

  - RAC = Round Asymmetric Cone
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 16 = 16° Beam Angle
  - 32 = 32° Beam Angle
  - 41 = 41° Beam Angle
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location (not available with open aperture)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100RPTDLA-...-RAC-OA-16-W. Refer to page 2 for delivered lumendata for other product configurations.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.




# 4" ProTools DL Wall Wash


## Square Wall Wash

Dedicated Wall Wash Luminaire for Even Illumination of Vertical Surfaces

- 4" square downlight with 2" light aperture.
- 0.7" regressed aperture / lens providing asymmetric beam distribution optimized for even illumination of vertical surfaces.
- High-angle illumination.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Wet Location as standard option (WL).

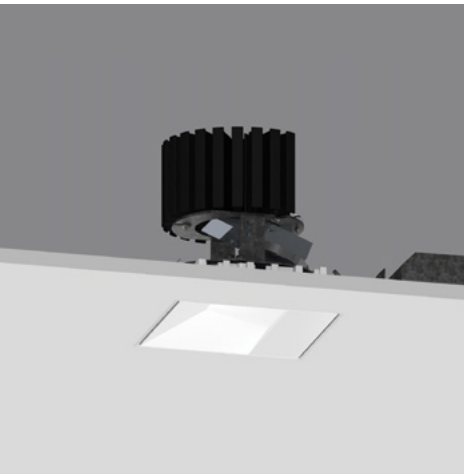


Recessed Plaster Trim

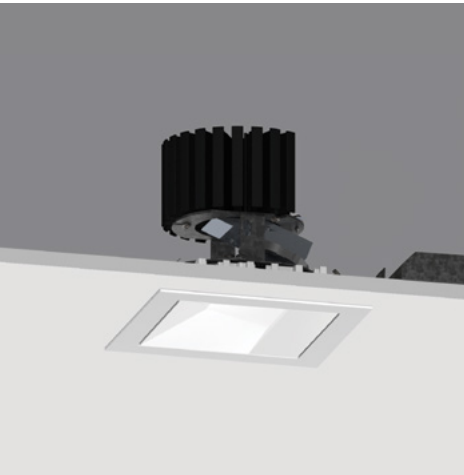

Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Flush aperture with room-side cutoff and wall wash distribution
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	Satin spread lens (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

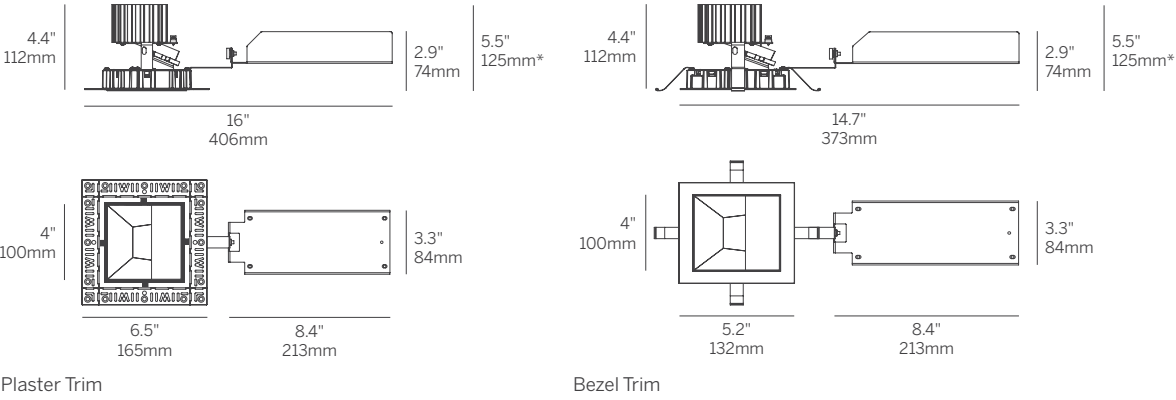

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
108-111

# 4" ProTools DL Wall Wash

## Square Wall Wash

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Finish	Options
WG-100SPTDLWW	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SWW	WWL	W S <sup>5</sup>	LP CP IC WL

Model	■ WG-100SPTDLWW = 4" ProTools DL Wall Wash
Fixation	■ RPT = Recessed Plaster Trim ■ RBT = Recessed Bezel Trim
Power <sup>1,2</sup>	■ L = Low Power, 5.7W @ 350mA ■ M = Mid Power, 8.4W @ 500mA ■ H = High Power, 12W @ 700mA ■ XH = Extra High Power, 17.8W @ 1050mA ■ TW = 9W @ 500mA ■ WD = 0.4 - 11.8W @ 350mA
CRI/CCT <sup>3</sup>	90+ CRI (Low/Mid/High/Extra High) ■ 927 = 2700K, (322/446/600/841 lm) ■ 930 = 3000K, (346/480/646/905 lm) ■ 935 = 3500K, (346/480 / 646/905 lm) ■ 940 = 4000K, (371/514/692/969 lm) ■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm) ■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
Driver <sup>4</sup>	■ X = Remote driver, ordered separately ■ S = Standard non-dim driver, 120-277V ■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V ■ PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V ■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V ■ DFPN = Lutron Forward Phase 1% 120VAC ■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V ■ WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V
Cover	■ SWW = Square Wall Wash
Lens	■ WWL = Wall Wash Spread Lens
Finish	■ W = White, 15% gloss, RAL9003 (standard) ■ S = Silver, 15% gloss <sup>5</sup>
Options	ProTools downlights require no additional options kits for remodel & new construction ■ LP = Landing Pan ■ CP = Chicago Plenum Housing ■ IC = IC/NC Housing ■ WL = Wet Location

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100SPTDLWW-...-SWW-WWL-W. See Page 2 for additional details.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.






# 4" ProTools DL Wall Wash

## Round Wall Wash

Dedicated Wall Wash Luminaire for Even Illumination of Vertical Surfaces

- 4" round downlight with 2" light aperture.
- 0.7" regressed aperture / lens providing asymmetric beam distribution optimized for even illumination of vertical surfaces.
- High-angle illumination.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Wet Location as standard option (WL).

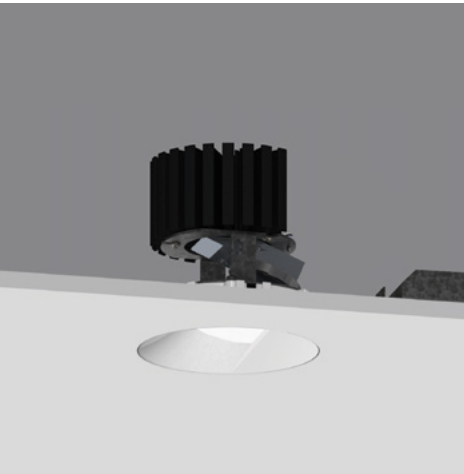


Recessed Plaster Trim



Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Flush aperture with room-side cutoff and wall wash distribution
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	Satin spread lens (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

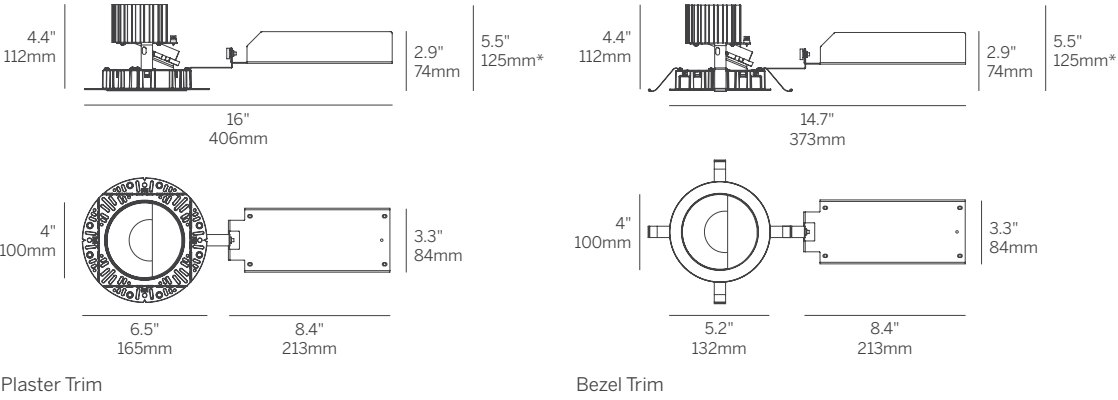

# 4" ProTools DL Wall Wash

## Round Wall Wash

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Finish	Options
WG-100RPTDLWW	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RWW	WWL	W S <sup>5</sup>	LP CP IC WL

<b>Model</b> <ul style="list-style-type: none"><li>■ WG-100RPTDLWW = 4" ProTools DL Wall Wash</li></ul>	<b>Cover</b> <ul style="list-style-type: none"><li>■ RWW = Round Wall Wash</li></ul>
<b>Fixation</b> <ul style="list-style-type: none"><li>■ RPT = Recessed Plaster Trim</li><li>■ RBT = Recessed Bezel Trim</li></ul>	<b>Lens</b> <ul style="list-style-type: none"><li>■ WWL = Wall Wash Spread Lens</li></ul>
<b>Power<sup>1,2</sup></b> <ul style="list-style-type: none"><li>■ L = Low Power, 5.7W @ 350mA</li><li>■ M = Mid Power, 8.4W @ 500mA</li><li>■ H = High Power, 12W @ 700mA</li><li>■ XH = Extra High Power, 17.8W @ 1050mA</li><li>■ TW = 9W @ 500mA</li><li>■ WD = 0.4 - 11.8W @ 350mA</li></ul>	<b>Finish</b> <ul style="list-style-type: none"><li>■ W = White, 15% gloss, RAL9003 (standard)</li><li>■ S = Silver, 15% gloss<sup>5</sup></li></ul>
<b>CRI/CCT<sup>3</sup></b> <p>90+ CRI (Low/Mid/High/Extra High)</p> <ul style="list-style-type: none"><li>■ 927 = 2700K, (267/371/499/699 lm)</li><li>■ 930 = 3000K, (288/399/537/752 lm)</li><li>■ 935 = 3500K, (288/399/537/752 lm)</li><li>■ 940 = 4000K, (308/427/575/806 lm)</li><li>■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm)</li><li>■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)</li></ul>	<b>Options</b> <p>ProTools downlights require no additional options kits for remodel &amp; new construction</p> <ul style="list-style-type: none"><li>■ LP = Landing Pan</li><li>■ CP = Chicago Plenum Housing</li><li>■ IC = IC/NC Housing</li><li>■ WL = Wet Location</li></ul>
<b>Driver<sup>4</sup></b> <ul style="list-style-type: none"><li>■ X = Remote driver, ordered separately</li><li>■ S = Standard non-dim driver, 120-277V</li><li>■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V</li><li>■ PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V</li><li>■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V</li><li>■ DFPN = Lutron Forward Phase 1% 120VAC</li><li>■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V</li><li>■ WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V</li></ul>	

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100RPTDLWW-...-RWW-WWL-W. See Page 2 fof specsheet or additional details.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and silver cover.




# 4" ProTools DLX Adjustable Square Recessed Cone


Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - Beam Angle: Various, Cut Off: 35°
  - Open aperture, clear lens or optical accessory lenses.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 45°, rotation 365°, 144 step.
  - Wet Location option as standard (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

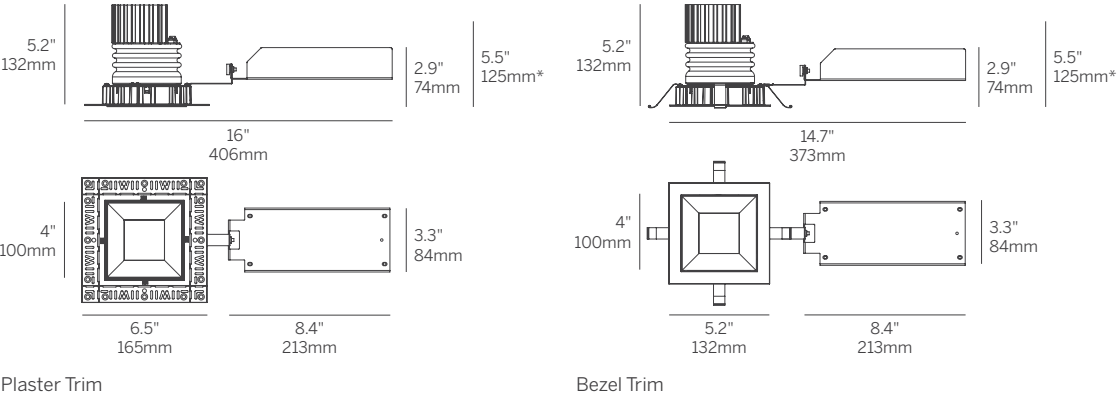

Recessed Plaster Trim

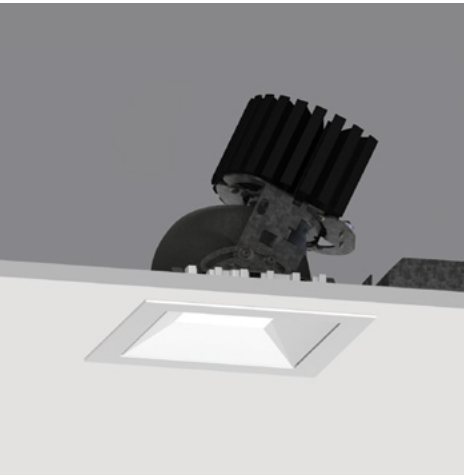

Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide 100-103

# 4" ProTools DLX Adjustable Square Recessed Cone

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SRC	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC WL

- Model**

  - WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (552/766/1031/1445 lm)
  - 930 = 3000K, (594/824/1110/1555 lm)
  - 935 = 3500K, (594/824/1110/1555 lm)
  - 940 = 4000K, (636/883/1188/1664 lm)
  - TW = Tunable White 1800 - 4000K, (610-1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V
- Cover**

  - SRC = Square Recessed Cone
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 16 = 16° Beam Angle
  - 32 = 32° Beam Angle
  - 41 = 41° Beam Angle
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location (not available with open aperture)
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

  - HX = Hex Louver
  - FG = Frosted Glass
  - LS = Linear Spread Lens
  - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100SPTDLX-...-SRC-OA-16-W. Refer to page 2 of specsheet for delivered lumen data for other product configurations. Source lumen data shown for TW and WD options.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.





# 4" ProTools DLX Adjustable Square Recessed Cone - Narrow


Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - 8 degree very narrow beam..
  - Open aperture, clear lens or optical accessory lenses.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 45°, rotation 365°, 144 step.
  - Wet Location option as standard (WL).


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated



Recessed Plaster Trim

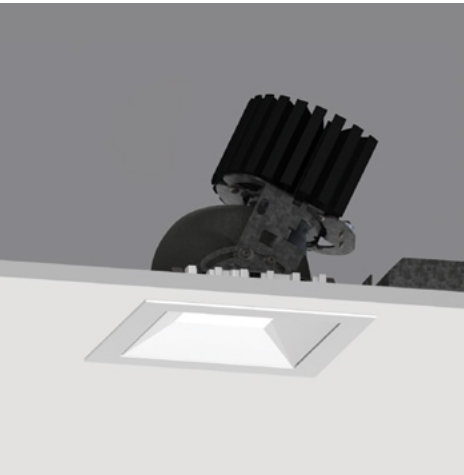

Recessed Bezel Trim

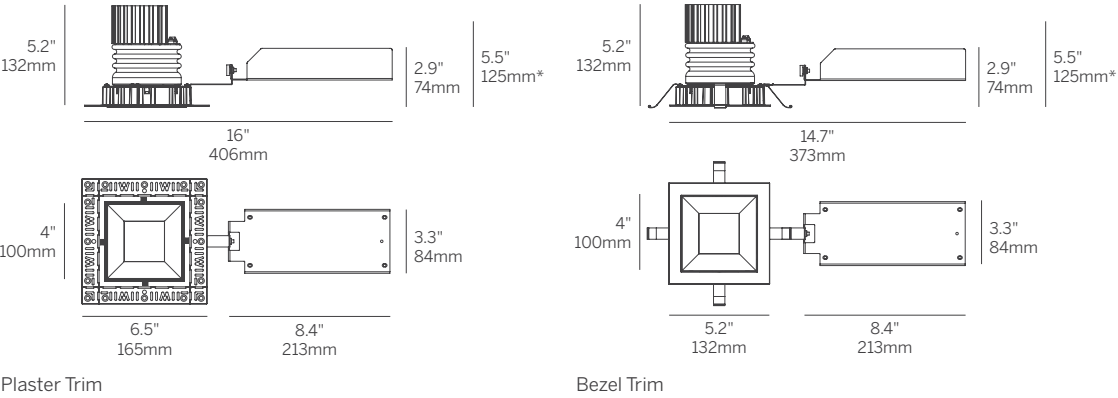

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DLX Adjustable Square Recessed Cone - Narrow

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ1 PEQ0 DFPN	SRC	OA MPL RSC	8 (Narrow)	W S <sup>5</sup>	LP CP IC WL

- Model**

  - WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 4W @ 350mA
  - M = Mid Power, 5.8W @ 500mA
  - H = High Power, 8.4W @ 700mA
  - XH = Extra High Power, 13W @ 1050mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (360/480/630/850 lm)
  - 930 = 3000K, (380/510/670/910 lm)
  - 935 = 3500K, (380/510/670/910 lm)
  - 940 = 4000K, (410/560/730/980 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**

  - SRC = Square Recessed Cone
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 8 = 8° Beam Angle (Narrow) (TIR Optic)
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location (not available with open aperture)
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

  - HX = Hex Louver
  - FG = Frosted Glass
  - LS = Linear Spread Lens
  - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Source lumens shown.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.




# 4" ProTools DLX Adjustable

## Square Recessed Cone - Adjustable Beam

Zoom Beam With Pan And Tilt Adjustment From  
Regressed Source And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - 13-48 degree zoom.
  - Open aperture.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 45°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	13-48 degree beam spreads (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

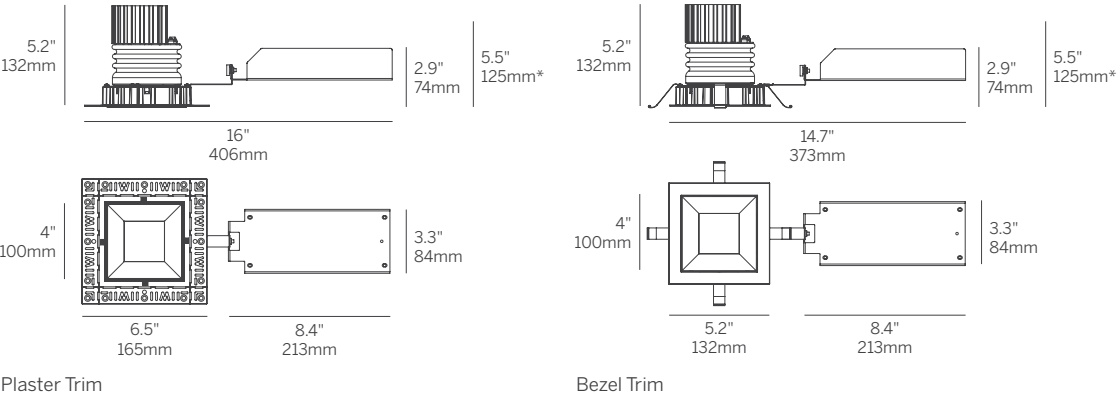


\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103



Recessed Plaster Trim

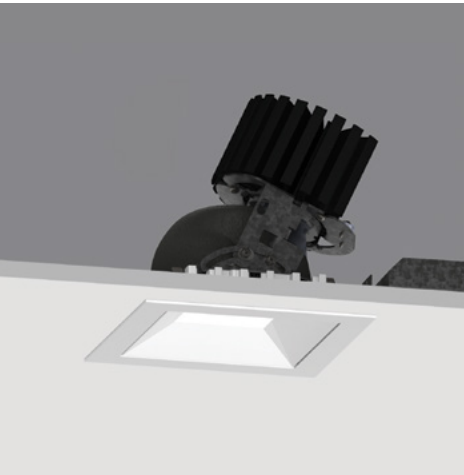

Recessed Bezel Trim

# 4" ProTools DLX Adjustable

## Square Recessed Cone - Adjustable Beam

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SRC	OA	13-48 (Zoom)	W S <sup>5</sup>	LP CP IC

**Model**  
■ WG-100SPTDLX = 4" ProTools DLX Adjustable

**Fixation**  
■ RPT = Recessed Plaster Trim  
■ RBT = Recessed Bezel Trim

**Power<sup>1,2</sup>**  
■ L = Low Power, 5.7W @ 350mA  
■ M = Mid Power, 8.4W @ 500mA  
■ H = High Power, 12W @ 700mA  
■ XH = Extra High Power, 17.8W @ 1050mA  
■ TW = 9W @ 500mA  
■ WD = 0.4 - 11.8W @ 350mA

**CRI/CCT<sup>3</sup>**  
90+ CRI (Low/Mid/High/Extra High)  
■ 927 = 2700K, (720/999/1344/1884 lm)  
■ 930 = 3000K, (775/1075/1447/2027 lm)  
■ 935 = 3500K, (775/1075/1447/2027 lm)  
■ 940 = 4000K, (830/1151/1549/2171 lm)  
■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm)  
■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)

**Driver<sup>4</sup>**  
■ X = Remote driver, ordered separately  
■ S = Standard non-dim driver, 120-277V  
■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V  
■ PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V  
■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V  
■ DFPN = Lutron Forward Phase 1% 120VAC  
■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V  
■ WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V

**Cover**  
■ SRC = Square Recessed Cone

**Lens**  
■ OA = Open Aperture

**Beam**  
■ 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)

**Finish**  
■ W = White, 15% gloss, RAL9003 (standard)  
■ S = Silver, 15% gloss<sup>5</sup>

**Options**  
ProTools downlights require no additional options kits for remodel & new construction  
■ LP = Landing Pan  
■ CP = Chicago Plenum Housing  
■ IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.


- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Source lumens shown.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.



# 4" ProTools DLX Adjustable Round Recessed Cone

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - Beam Angle: Various, Cut Off: 25°.
  - Open aperture, clear lens or optical accessory lenses.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 45°, rotation 365°, 144 step.
  - Wet Location option as standard (WL).

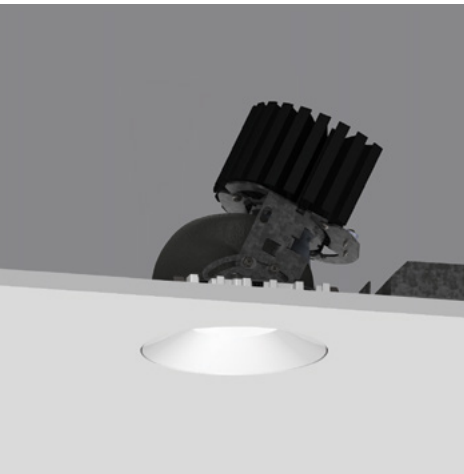


Recessed Plaster Trim



Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

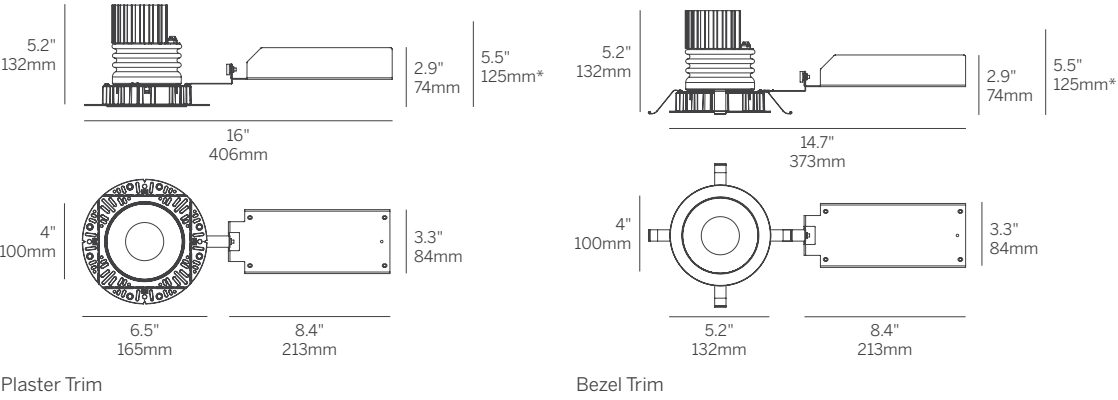

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide 100-103

# 4" ProTools DLX Adjustable Round Recessed Cone

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RRC	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC WL

- Model**

  - WG-100RPTDLX = 4" ProTools DLX Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (492/683/919/1287 lm)
  - 930 = 3000K, (529/734/989/1385 lm)
  - 935 = 3500K, (529/734/989/1385 lm)
  - 940 = 4000K, (567/786/1058/1483 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V
- Cover**

  - RRC = Round Recessed Cone
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 16 = 16° Beam Angle
  - 32 = 32° Beam Angle
  - 41 = 41° Beam Angle
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location (not available with open aperture)
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

  - HX = Hex Louver
  - FG = Frosted Glass
  - LS = Linear Spread Lens
  - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100RPTDLX-...-RRC-OA-16-W. Refer to page 2 of specsheet for delivered lumen data for other product configurations. Source lumen data shown for TW and WD options.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.






# 4" ProTools DLX Adjustable

## Round Recessed Cone - Narrow

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - 8 degree very narrow beam.
  - Open aperture, clear lens or optical accessory lenses.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 45°, rotation 365°, 144 step.
  - Wet Location option as standard (WL).

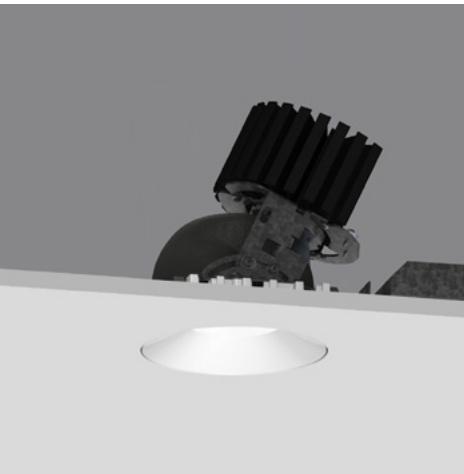


Recessed Plaster Trim



Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

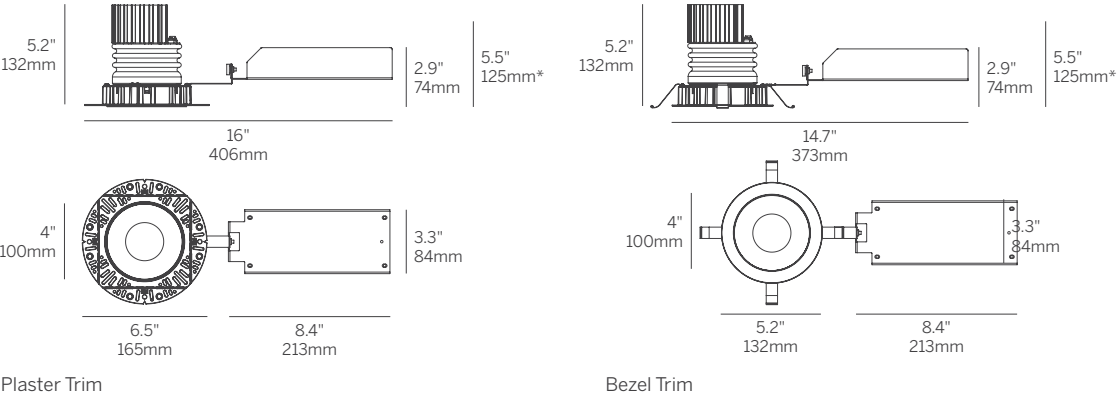

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DLX Adjustable

## Round Recessed Cone - Narrow

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ1 PEQ0 DFPN	RRC	OA MPL RSC	8 (Narrow)	W S <sup>5</sup>	LP CP IC WL

- Model**

  - WG-100RPTDLX = 4" ProTools DLX Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 4W @ 350mA
  - M = Mid Power, 5.8W @ 500mA
  - H = High Power, 8.4W @ 700mA
  - XH = Extra High Power, 13W @ 1050mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (360/480/630/850 lm)
  - 930 = 3000K, (380/510/670/910 lm)
  - 935 = 3500K, (380/510/670/910 lm)
  - 940 = 4000K, (410/560/730/980 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**

  - RRC = Round Recessed Cone
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 8 = 8° Beam Angle (Narrow) (TIR Optic)
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location (not available with open aperture)
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

  - HX = Hex Louver
  - FG = Frosted Glass
  - LS = Linear Spread Lens
  - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.


- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Source lumens shown.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.

# 4" ProTools DLX Adjustable

## Round Recessed Cone - Adjustable Beam

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - 13-48 degree zoom.
  - Open aperture.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 45°, rotation 365°, 144 step.

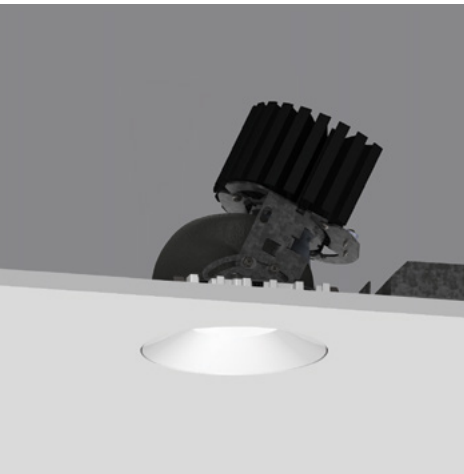


Recessed Plaster Trim



Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	13-48 degree beam spreads (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

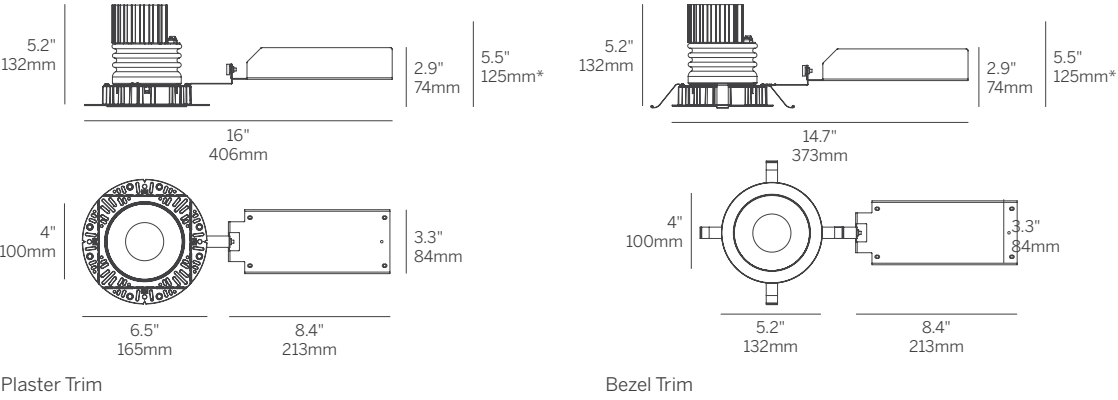

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DLX Adjustable

## Round Recessed Cone - Adjustable Beam

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RRC	OA	13-48 (Zoom)	W S <sup>5</sup>	LP CP IC

- Model**

  - WG-100RPTDLX = 4" ProTools DLX Adjustable

**Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim

**Power<sup>1,2</sup>**

  - L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA

**CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (720/999/1344/1884 lm)
  - 930 = 3000K, (775/1075/1447/2027 lm)
  - 935 = 3500K, (775/1075/1447/2027 lm)
  - 940 = 4000K, (830/1151/1549/2171 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)

**Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V
- Cover**

  - RRC = Round Recessed Cone

**Lens**

  - OA = Open Aperture

**Beam**

  - 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)

**Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>

**Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Source lumens shown..
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.




# 4" ProTools DLX Adjustable Square Regressed Pinhole

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - Beam Angle: Various, Cut Off: 35°.
  - Open aperture, clear lens or optical accessory lenses.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 45°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

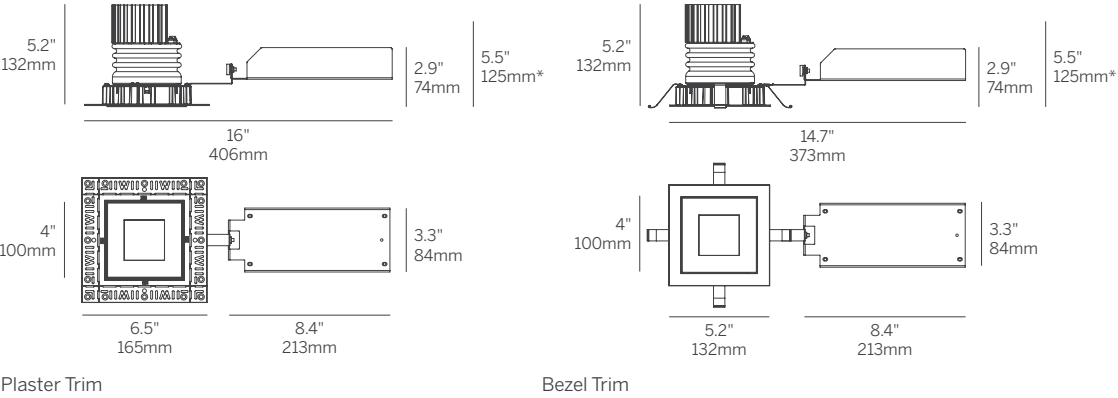

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DLX Adjustable Square Regressed Pinhole

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SRP	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC

- Model**

  - WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (494/686/923/1293 lm)
  - 930 = 3000K, (532/738/993/1391 lm)
  - 935 = 3500K, (532/738/993/1391 lm)
  - 940 = 4000K, (569/790/1063/1489 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V
- Cover**

  - SRP = Square Regressed Pinhole
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 16 = 16° Beam Angle
  - 32 = 32° Beam Angle
  - 41 = 41° Beam Angle
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

  - HX = Hex Louver
  - FG = Frosted Glass
  - LS = Linear Spread Lens
  - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100SPTDLX-...-SRP-OA-16-W. Refer to page 2 of specsheet for delivered lumen datafor other product configurations. Source lumen data shown for TW and WD options.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.







# 4" ProTools DLX Adjustable

## Square Regressed Pinhole - Adjustable Beam

Zoom Beam With Pan And Tilt Adjustment From  
Regressed Source And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
- Regressed aperture / lens position provides good glare control.
- 13-48 degree zoom.
- Open aperture.
- No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 45°, rotation 365°, 144 step.

**Housing** Die-caste aluminum for precision fit and heat dissipation  
Mounting hardware for all ceiling types; trim and trimless  
EZ clip mounting for secure installation  
Snap-in cover  
Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings

**Covers** Square regressed pinhole - smallest apperture, maximum glare control

**LED** 90+ CRI  
Low/Mid/High/Extra High output choices  
2700K, 3000K, 3500K, 4000K  
Tuneable White from 1800K - 4000K  
Warm Dim from 1800 - 3000K

**Beam** 13-48 degree beam spread (TIR Optic)

**Driver** Integral and remote drivers for all dimming and non-dimming applications  
Through-wire integral driver enclosure installed from below without the need for bulky housing  
POE driver compatibility


**Installation** Not required when using the Driver Enclosure  
**Housing** Optional: IC and Chicago plenum  
Optional: new construction (with j-box and driver attached)  
Optional: Landing pan for use with Driver Enclosure to locate cut-out locations

**Warranty** 5-year Limited (see complete company warranty information)


**Certifications** ETL and ETL-C for dry and damp location, CE



Recessed Plaster Trim

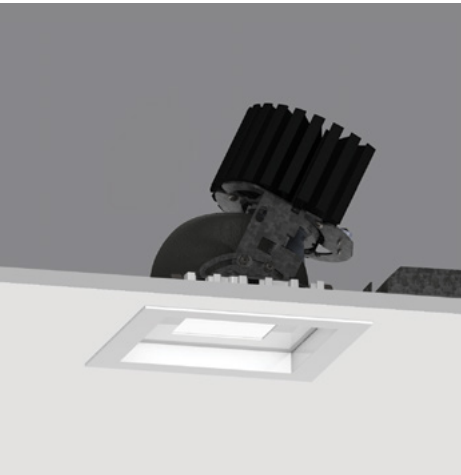

Recessed Bezel Trim

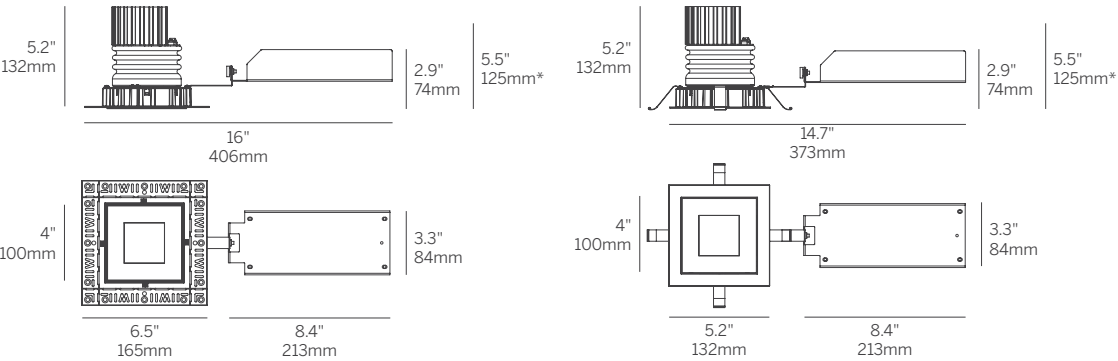

Plaster Trim

Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-103

# 4" ProTools DLX Adjustable

## Square Regressed Pinhole - Adjustable Beam

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SRP	OA	13-48 (Zoom)	W S <sup>5</sup>	LP CP IC

### Model

- WG-100SPTDLX = 4" ProTools DLX Adjustable

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

### Power<sup>1,2</sup>

- L = Low Power, 5.7W @ 350mA
- M = Mid Power, 8.4W @ 500mA
- H = High Power, 12W @ 700mA
- XH = Extra High Power, 17.8W @ 1050mA
- TW = 9W @ 500mA
- WD = 0.4 - 11.8W @ 350mA

### CRI/CCT<sup>3</sup>

- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (720/999/1344/1884 lm)
  - 930 = 3000K, (775/1075/1447/2027 lm)
  - 935 = 3500K, (775/1075/1447/2027 lm)
  - 940 = 4000K, (830/1151/1549/2171 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)

### Driver<sup>4</sup>

- X = Remote driver, ordered separately
- S = Standard non-dim driver, 120-277V
- D010 = EldoLED, 1%, 0-10V Driver, 120-277V
- PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC
- TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V

### Cover

- SRP = Square Recessed Pinhole

### Lens

- OA = Open Aperture

### Beam

- 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)

### Finish

- W = White, 15% gloss, RAL9003 (standard)
- S = Silver, 15% gloss<sup>5</sup>

### Options

ProTools downlights require no additional options kits for remodel & new construction

- LP = Landing Pan
- CP = Chicago Plenum Housing
- IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

### Notes


- 1 Other lumen packages available, consult factory.
- 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 3 Source lumens shown.
- 4 See power supply page for details.
- 5 Plaster trim version includes white frame and gray cover.

# 4" ProTools DLX Adjustable Round Regressed Pinhole

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - Beam Angle: Various, Cut Off: 30°.
  - Open aperture, clear lens or optical accessory lenses.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 45°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

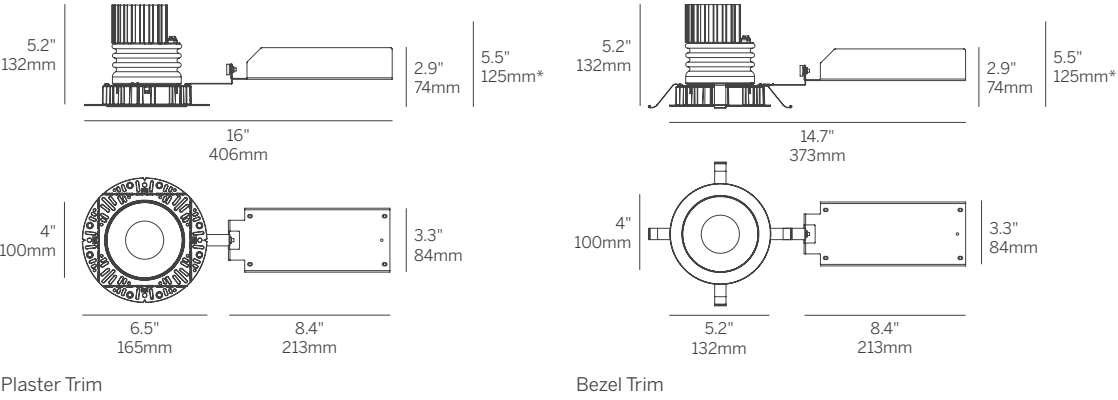

Recessed Plaster Trim



Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
90-93

# 4" ProTools DLX Adjustable Round Regressed Pinhole

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RRP	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC

- Model**

  - WG-100RPTDLX = 4" ProTools DLX Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (492/683/919/1287 lm)
  - 930 = 3000K, (529/734/989/1385 lm)
  - 935 = 3500K, (529/734/989/1385 lm)
  - 940 = 4000K, (567/786/1058/1483 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V
- Cover**

  - RRP = Round Regressed Pinhole
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 16 = 16° Beam Angle
  - 32 = 32° Beam Angle
  - 41 = 41° Beam Angle
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

  - HX = Hex Louver
  - FG = Frosted Glass
  - LS = Linear Spread Lens
  - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100RPTDLX-...-RRP-OA-16-W. Refer to page 2 of specs sheet for delivered lumen data for other product configurations. Source lumen data shown for TW and WD options.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.






# 4" ProTools DLX Adjustable

## Round Regressed Pinhole - Narrow

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - 8 degree very narrow beam.
  - Open aperture, clear lens or optical accessory lenses.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 45°, rotation 365°, 144 step.

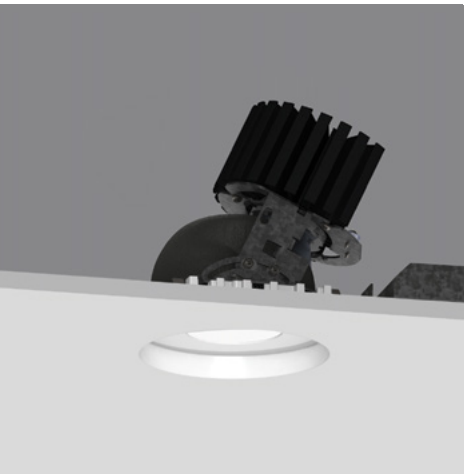


Recessed Plaster Trim



Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

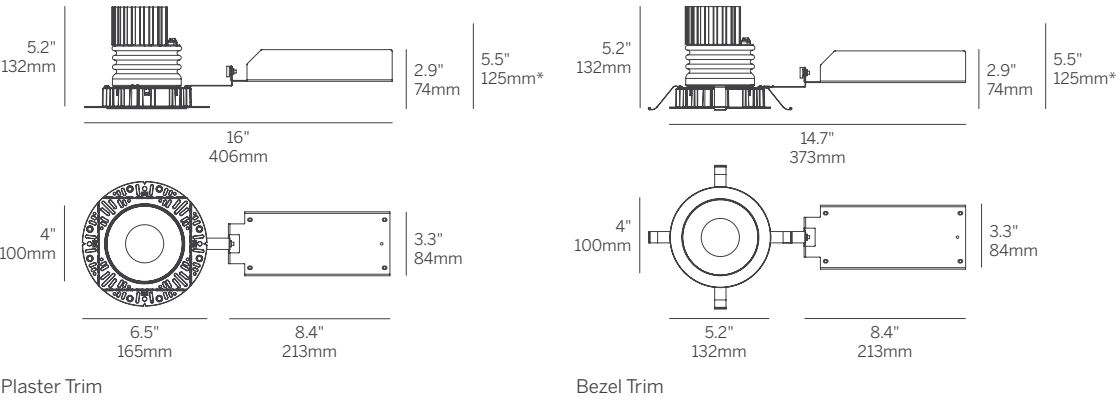

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
90-93

# 4" ProTools DLX Adjustable

## Round Regressed Pinhole - Narrow

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ1 PEQ0 DFPN	RRP	OA MPL RSC	8 (Narrow)	W S <sup>5</sup>	LP CP IC

- Model**

  - WG-100RPTDLX = 4" ProTools DLX Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 4W @ 350mA
  - M = Mid Power, 5.8W @ 500mA
  - H = High Power, 8.4W @ 700mA
  - XH = Extra High Power, 13W @ 1050mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (360/480/630/850 lm)
  - 930 = 3000K, (380/510/670/910 lm)
  - 935 = 3500K, (380/510/670/910 lm)
  - 940 = 4000K, (410/560/730/980 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**

  - RRP = Round Regressed Pinhole
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 8 = 8° Beam Angle (Narrow) (TIR Optic)
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

  - HX = Hex Louver
  - FG = Frosted Glass
  - LS = Linear Spread Lens
  - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Source lumens shown.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.




# 4" ProTools DLX Adjustable

## Round Regressed Pinhole - Adjustable Beam

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - 13-48 degree zoom.
  - Open aperture.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 45°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	13-48 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

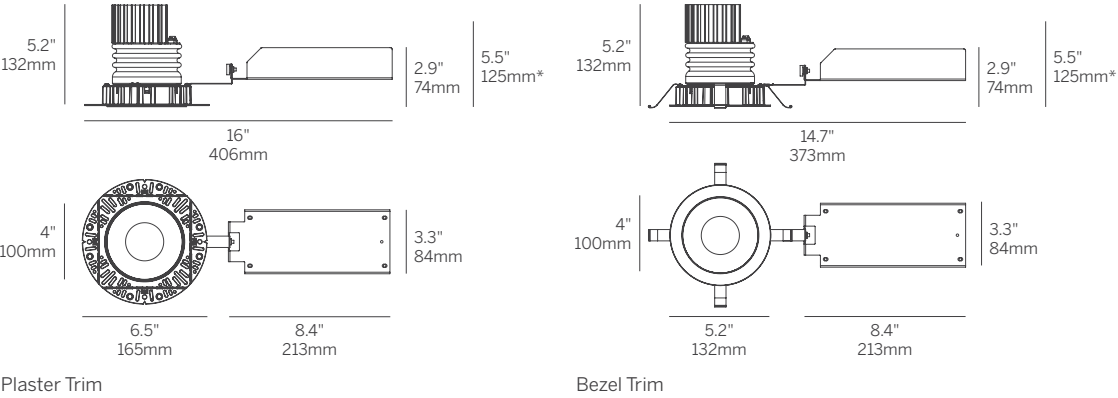

Recessed Plaster Trim



Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
90-93

# 4" ProTools DLX Adjustable

## Round Regressed Pinhole - Adjustable Beam

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RRP	OA	13-48 (Zoom)	W S <sup>5</sup>	LP CP IC

- Model**

  - WG-100RPTDLX = 4" ProTools DLX Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (720/999/1344/1884 lm)
  - 930 = 3000K, (775/1075/1447/2027 lm)
  - 935 = 3500K, (775/1075/1447/2027 lm)
  - 940 = 4000K, (830/1151/1549/2171 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V
- Cover**

  - RRP = Round Regressed Pinhole
- Lens**

  - OA = Open Aperture
- Beam**

  - 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Source lumens shown.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.



4" ProTools DLX Adjustable  
Square Asymmetric Cone

Asymmetric Cover For Minimum Beam Clipping  
With Wider Angle Optics And Higher Angle Focusing

- 4" square downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - Beam Angle: Various
  - Open aperture, clear lens or optical accessory lenses.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 35°, rotation 365°, 144 step.
  - Wet Location option as standard (WL).




Recessed Plaster Trim



Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

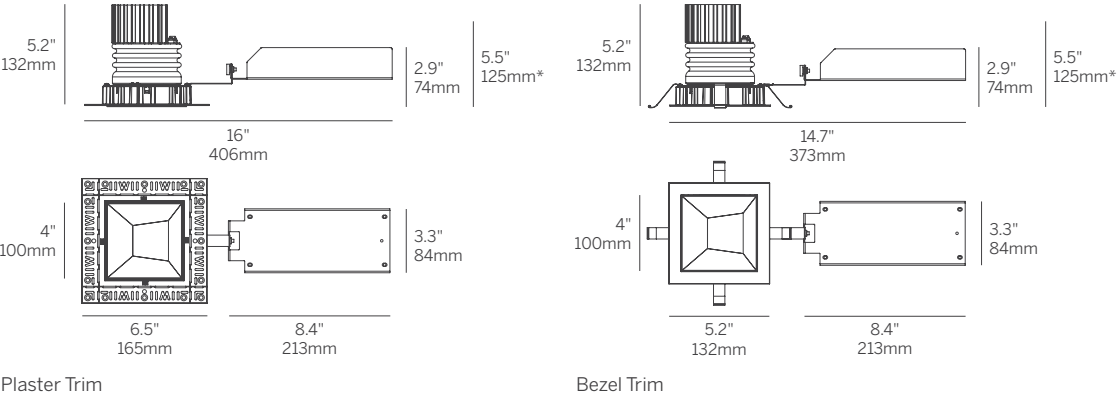

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-104

4" ProTools DLX Adjustable  
Square Asymmetric Cone

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SAC	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC WL

- Model**

  - WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (447/620/834/1169 lm)
  - 930 = 3000K, (481/667/898/1258 lm)
  - 935 = 3500K, (481/667/898/1258 lm)
  - 940 = 4000K, (515/714/961/1347 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V
- Cover**

  - SAC = Square Asymmetric Cone
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 16 = 16° Beam Angle
  - 32 = 32° Beam Angle
  - 41 = 41° Beam Angle
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location (not available with open aperture)
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

  - HX = Hex Louver
  - FG = Frosted Glass
  - LS = Linear Spread Lens
  - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100SPTDLX-...-SAC-OA-16-W. Refer to page 2 of specsheet for delivered lumen data for other product configurations. Source lumen data shown for TW and WD options.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.






# 4" ProTools DLX Adjustable

## Square Asymmetric Cone - Narrow

Asymmetric Cover For Minimum Beam Clipping  
With Wider Angle Optics And Higher Angle Focusing

- 4" square downlight with 2" light aperture.
- Regressed aperture / lens position provides good glare control.
- 8 degree very narrow beam.
- Open aperture, clear lens or optical accessory lenses.
- No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 35°, rotation 365°, 144 step.
- Wet Location option as standard (WL).


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

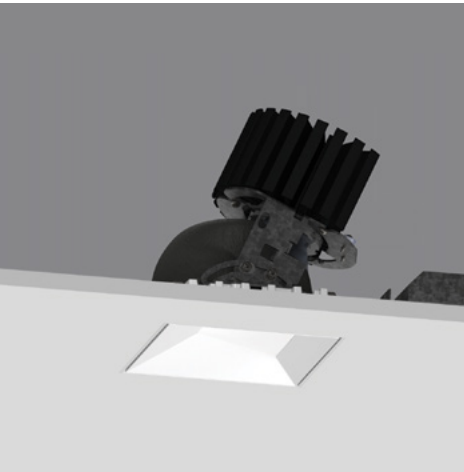

Recessed Plaster Trim



Recessed Bezel Trim

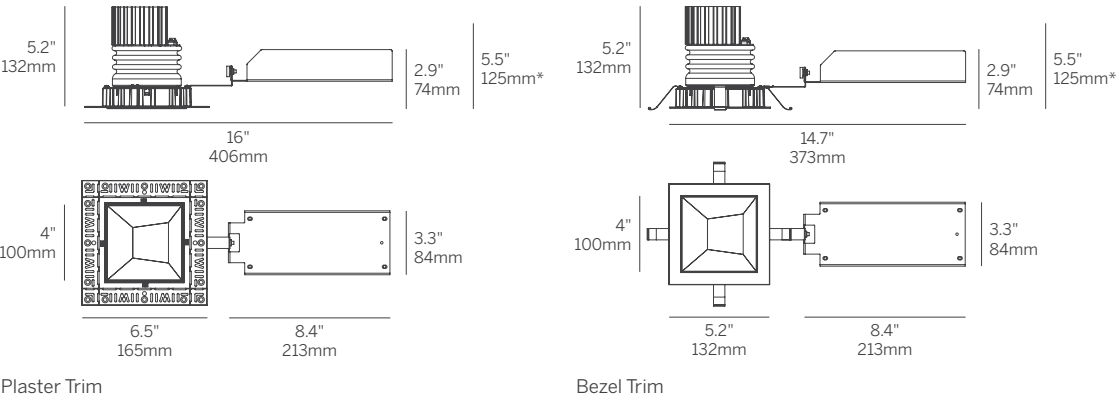

# 4" ProTools DLX Adjustable

## Square Asymmetric Cone - Narrow

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ1 PEQ0 DFPN	SAC	OA MPL RSC	8 (Narrow)	W S <sup>5</sup>	LP CP IC WL

- Model**
- WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**
- RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**
- L = Low Power, 4W @ 350mA
  - M = Mid Power, 5.8W @ 500mA
  - H = High Power, 8.4W @ 700mA
  - XH = Extra High Power, 13W @ 1050mA
- CRI/CCT<sup>3</sup>**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (360/480/630/850 lm)
  - 930 = 3000K, (380/510/670/910 lm)
  - 935 = 3500K, (380/510/670/910 lm)
  - 940 = 4000K, (410/560/730/980 lm)
- Driver<sup>4</sup>**
- X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**
- SAC = Square Asymmetric Cone
- Lens**
- OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**
- 8 = 8° Beam Angle (Narrow) (TIR Optic)
- Finish**
- W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location (not available with open aperture)
- Optical Accessory Holder**
- Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder
- HX = Hex Louver
  - FG = Frosted Glass
  - LS = Linear Spread Lens
  - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Source lumens shown.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.




# 4" ProTools DLX Adjustable

## Square Asymmetric Cone - Adjustable Beam

Asymmetric Cover For Minimum Beam Clipping  
With Wider Angle Optics And Higher Angle Focusing

- 4" square downlight with 2" light aperture.
- Regressed aperture / lens position provides good glare control.
- 13-48 degree zoom.
- Open aperture.
- No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 35°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Square asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	13-48 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

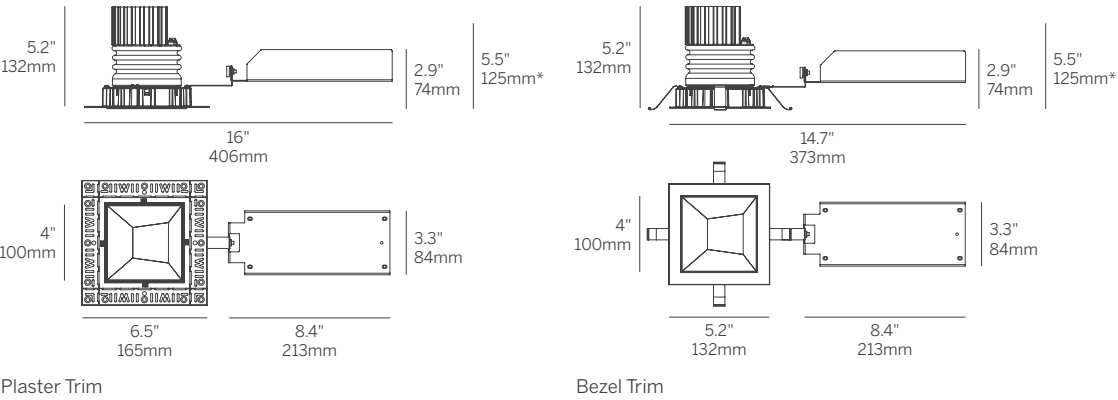

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-104

# 4" ProTools DLX Adjustable

## Square Asymmetric Cone - Adjustable Beam

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	SAC	OA	13-48 (Zoom)	W S <sup>5</sup>	LP CP IC

<b>Model</b> <ul style="list-style-type: none"><li>■ WG-100SPTDLX = 4" ProTools DLX Adjustable</li></ul>	<b>Cover</b> <ul style="list-style-type: none"><li>■ SAC = Square Asymmetric Cone</li></ul>
<b>Fixation</b> <ul style="list-style-type: none"><li>■ RPT = Recessed Plaster Trim</li><li>■ RBT = Recessed Bezel Trim</li></ul>	<b>Lens</b> <ul style="list-style-type: none"><li>■ OA = Open Aperture</li></ul>
<b>Power<sup>1,2</sup></b> <ul style="list-style-type: none"><li>■ L = Low Power, 5.7W @ 350mA</li><li>■ M = Mid Power, 8.4W @ 500mA</li><li>■ H = High Power, 12W @ 700mA</li><li>■ XH = Extra High Power, 17.8W @ 1050mA</li><li>■ TW = 9W @ 500mA</li><li>■ WD = 0.4 - 11.8W @ 350mA</li></ul>	<b>Beam</b> <ul style="list-style-type: none"><li>■ 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)</li></ul>
<b>CRI/CCT<sup>3</sup></b> <p>90+ CRI (Low/Mid/High/Extra High)</p> <ul style="list-style-type: none"><li>■ 927 = 2700K, (720/999/1344/1884 lm)</li><li>■ 930 = 3000K, (775/1075/1447/2027 lm)</li><li>■ 935 = 3500K, (775/1075/1447/2027 lm)</li><li>■ 940 = 4000K, (830/1151/1549/2171 lm)</li><li>■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm)</li><li>■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)</li></ul>	<b>Finish</b> <ul style="list-style-type: none"><li>■ W = White, 15% gloss, RAL9003 (standard)</li><li>■ S = Silver, 15% gloss<sup>5</sup></li></ul>
<b>Driver<sup>4</sup></b> <ul style="list-style-type: none"><li>■ X = Remote driver, ordered separately</li><li>■ S = Standard non-dim driver, 120-277V</li><li>■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V</li><li>■ PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V</li><li>■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V</li><li>■ DFPN = Lutron Forward Phase 1% 120VAC</li><li>■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V</li><li>■ WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V</li></ul>	<b>Options</b> <p>ProTools downlights require no additional options kits for remodel &amp; new construction</p> <ul style="list-style-type: none"><li>■ LP = Landing Pan</li><li>■ CP = Chicago Plenum Housing</li><li>■ IC = IC/NC Housing</li></ul>

Whitegoods reserves the right to change any information without prior notice.


- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Source lumens shown.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.



# 4" ProTools DLX Adjustable Round Asymmetric Cone

Asymmetric Cover For Minimum Beam Clipping  
With Wider Angle Optics And Higher Angle Focusing

- 4" round downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - Beam Angle: Various
  - Open aperture, clear lens or optical accessory lenses.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 35°, Rotation 365°, 144 step.
  - Wet Location option as standard (WL).

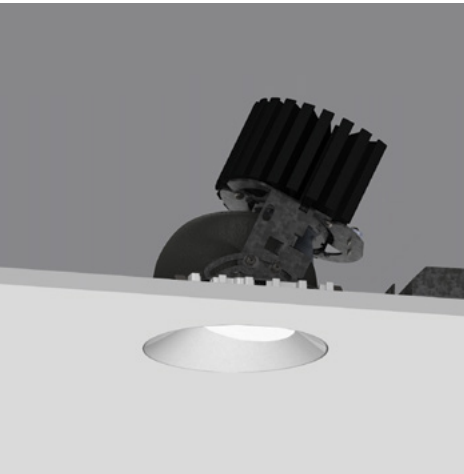


Recessed Plaster Trim



Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

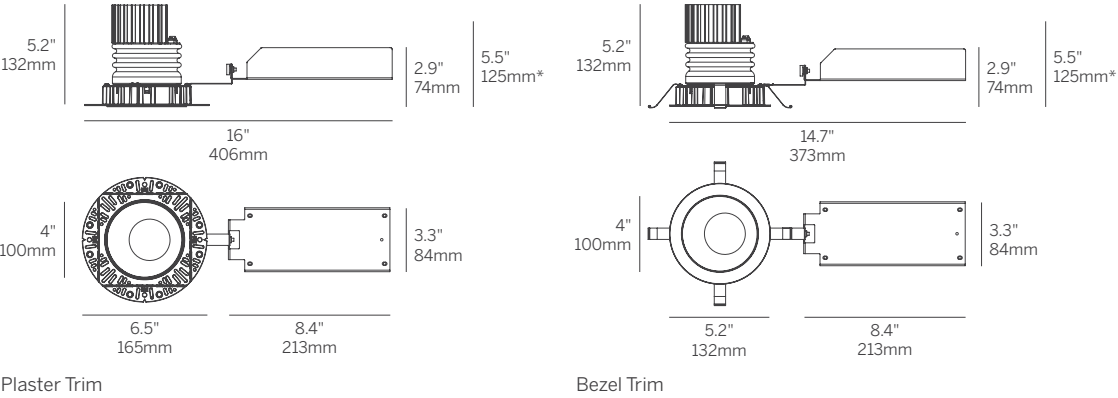

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-104

# 4" ProTools DLX Adjustable Round Asymmetric Cone

Model	Fixation	Power <sup>1,2</sup>	CRI/ CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RAC	OA MPL RSC	16 32 41	W S <sup>5</sup>	LP CP IC WL

- Model**

  - WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 5.7W @ 350mA
  - M = Mid Power, 8.4W @ 500mA
  - H = High Power, 12W @ 700mA
  - XH = Extra High Power, 17.8W @ 1050mA
  - TW = 9W @ 500mA
  - WD = 0.4 - 11.8W @ 350mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (501/695/936/1311 lm)
  - 930 = 3000K, (539/748/1007/1410 lm)
  - 935 = 3500K, (539/748/1007/1410 lm)
  - 940 = 4000K, (577/801/1078/1510 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
  - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
  - WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V
- Cover**

  - RAC = Round Asymmetric Cone
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 16 = 16° Beam Angle
  - 32 = 32° Beam Angle
  - 41 = 41° Beam Angle
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location (not available with open aperture)
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

  - HX = Hex Louver
  - FG = Frosted Glass
  - LS = Linear Spread Lens
  - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Delivered lumen data shown for WG-100RPTDLX-...-RAC-OA-16-W. Refer to page 2 of specsheet for delivered lumen data for other product configurations. Source lumen data shown for TW and WD options.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.






# 4" ProTools DLX Adjustable

## Round Asymmetric Cone - Narrow

Asymmetric Cover For Minimum Beam Clipping  
With Wider Angle Optics And Higher Angle Focusing

- 4" round downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - 8 degree very narrow beam.
  - Open aperture, clear lens or optical accessory lenses.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 35°, rotation 365°, 144 step.
  - Wet Location option as standard (WL).


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

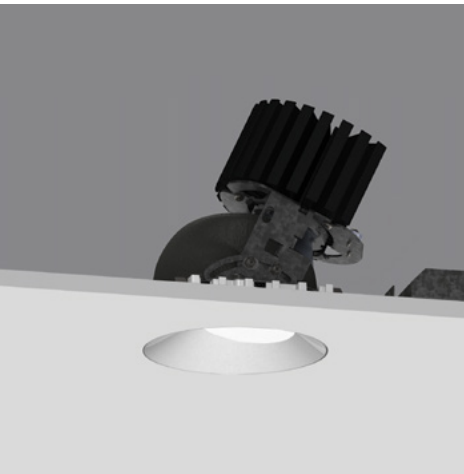

Recessed Plaster Trim



Recessed Bezel Trim

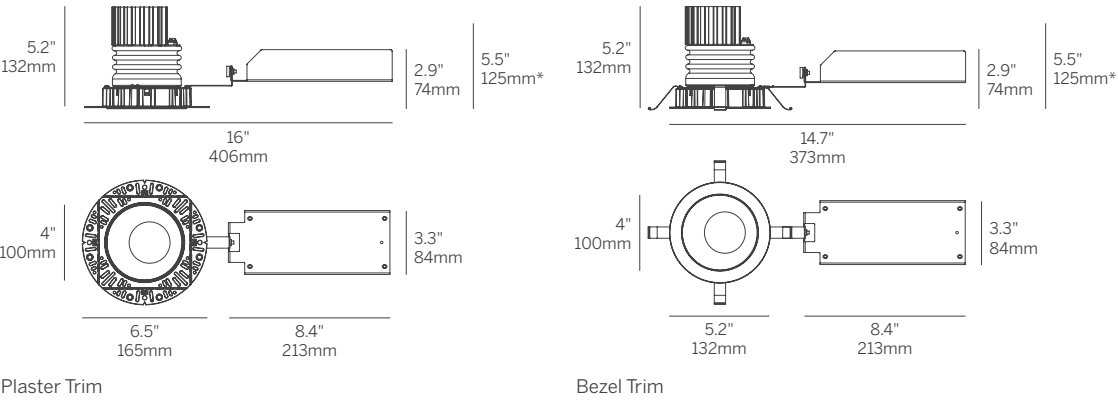

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-104

# 4" ProTools DLX Adjustable

## Round Asymmetric Cone - Narrow

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ1 PEQ0 DFPN	RAC	OA MPL RSC	8 (Narrow)	W S <sup>5</sup>	LP CP IC WL

- Model**

  - WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**

  - RPT = Recessed Plaster Trim
  - RBT = Recessed Bezel Trim
- Power<sup>1,2</sup>**

  - L = Low Power, 4W @ 350mA
  - M = Mid Power, 5.8W @ 500mA
  - H = High Power, 8.4W @ 700mA
  - XH = Extra High Power, 13W @ 1050mA
- CRI/CCT<sup>3</sup>**

90+ CRI (Low/Mid/High/Extra High)

  - 927 = 2700K, (360/480/630/850 lm)
  - 930 = 3000K, (380/510/670/910 lm)
  - 935 = 3500K, (380/510/670/910 lm)
  - 940 = 4000K, (410/560/730/980 lm)
- Driver<sup>4</sup>**

  - X = Remote driver, ordered separately
  - S = Standard non-dim driver, 120-277V
  - D010 = EIdoLED, 1%, 0-10V Driver, 120-277V
  - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
  - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
  - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**

  - RAC = Round Asymmetric Cone
- Lens**

  - OA = Open Aperture
  - MPL = Micro-prismatic Lens
  - RSC = Satin Clear
- Beam**

  - 8 = 8° Beam Angle (Narrow) (TIR Optic)
- Finish**

  - W = White, 15% gloss, RAL9003 (standard)
  - S = Silver, 15% gloss<sup>5</sup>
- Options**

ProTools downlights require no additional options kits for remodel & new construction

  - LP = Landing Pan
  - CP = Chicago Plenum Housing
  - IC = IC/NC Housing
  - WL = Wet Location (not available with open aperture)
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

  - HX = Hex Louver
  - FG = Frosted Glass
  - LS = Linear Spread Lens
  - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
  - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
  - 3 Source lumens shown.
  - 4 See power supply page for details.
  - 5 Plaster trim version includes white frame and gray cover.

# 4" ProTools DLX Adjustable

## Round Asymmetric Cone - Adjustable Beam

Asymmetric Cover For Minimum Beam Clipping  
With Wider Angle Optics And Higher Angle Focusing



- 4" round downlight with 2" light aperture.
  - Regressed aperture / lens position provides good glare control.
  - 13-48 degree zoom.
  - Open aperture.
  - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
  - Mounts in 1/16" to 1" surface.
  - Tunable White and Warm Dim.
  - Modular interchangeability throughout the entire ProTools range of products.
  - Tilt 35°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tuneable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	13-48 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility

Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations

Warranty	5-year Limited (see complete company warranty information)
----------	--

Certifications	ETL and ETL-C for dry and damp location, CE
----------------	---

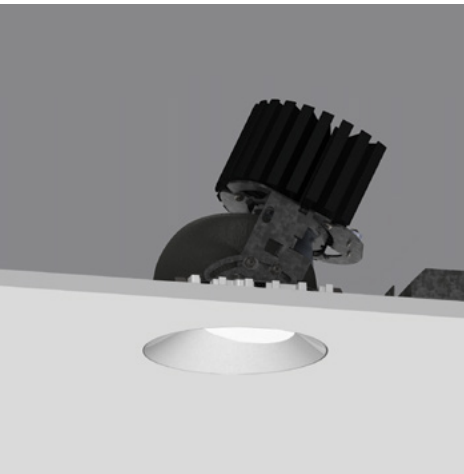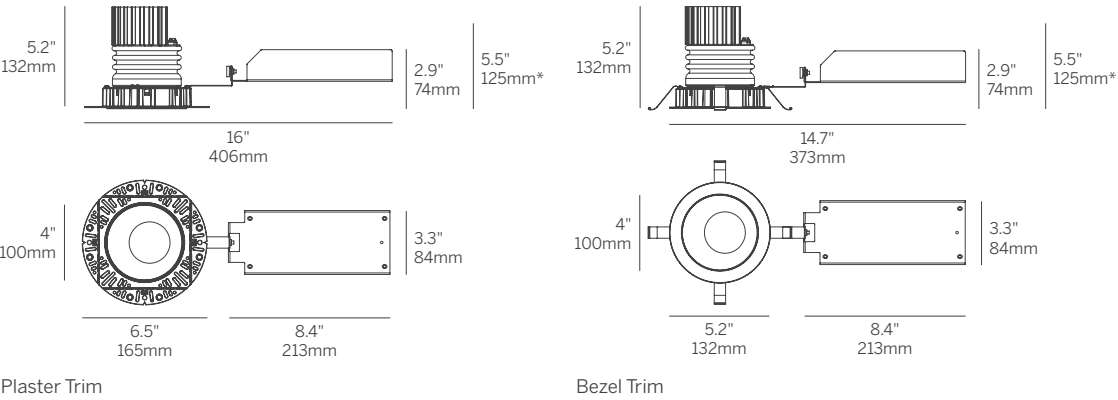

Recessed Plaster Trim



Recessed Bezel Trim

\*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide  
100-104

# 4" ProTools DLX Adjustable

## Round Asymmetric Cone - Adjustable Beam

Model	Fixation	Power <sup>1,2</sup>	CRI/CCT <sup>3</sup>	Driver <sup>4</sup>	Cover	Lens	Beam	Finish	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD	927 930 935 940 TW WD	X S D010 PEQ1 PEQ0 DFPN TW WD	RAC	OA	13-48 (Zoom)	W S <sup>5</sup>	LP CP IC WL

### Model

- WG-100SPTDLX = 4" ProTools DLX Adjustable

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

### Power<sup>1,2</sup>

- L = Low Power, 5.7W @ 350mA
- M = Mid Power, 8.4W @ 500mA
- H = High Power, 12W @ 700mA
- XH = Extra High Power, 17.8W @ 1050mA
- TW = 9W @ 500mA
- WD = 0.4 - 11.8W @ 350mA

### CRI/CCT<sup>3</sup>

- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (720/999/1344/1884 lm)
  - 930 = 3000K, (775/1075/1447/2027 lm)
  - 935 = 3500K, (775/1075/1447/2027 lm)
  - 940 = 4000K, (830/1151/1549/2171 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)

### Driver<sup>4</sup>

- X = Remote driver, ordered separately
- S = Standard non-dim driver, 120-277V
- D010 = EldoLED, 1%, 0-10V Driver, 120-277V
- PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC
- TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- WD = EldoLED, 0.1%, 0-10V dimming (WD), 120-277V

### Cover

- RAC = Round Asymmetric Cone

### Lens

- OA = Open Aperture

### Beam

- 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)

### Finish

- W = White, 15% gloss, RAL9003 (standard)
- S = Silver, 15% gloss<sup>5</sup>

### Options

ProTools downlights require no additional options kits for remodel & new construction

- LP = Landing Pan
- CP = Chicago Plenum Housing
- IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

### Notes

- 1 Other lumen packages available, consult factory.
- 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 3 Source lumens shown.
- 4 See power supply page for details.
- 5 Plaster trim version includes white frame and gray cover.





# Design Guide

We have provided performance data and characteristics for Whitegoods luminaires, as well as providing expected light levels for typical scenarios based on set parameters. The results are intended as a handy reference to help the specifier plan their project quickly, efficiently and with confidence.


We have taken the most common uses of each luminaire type, set distances and heights based on typical situations and calculated the results. Then, we vary the parameters a little either way so that you can decide for yourself the best option for your particular requirement.





4" ProTools Single Downlight - Performance

WG 100SPTD, WG 100RPTD, WG 100SPTDL, WG 100RPTDL, WG 100SPTDLX, WG 100RPTDLX

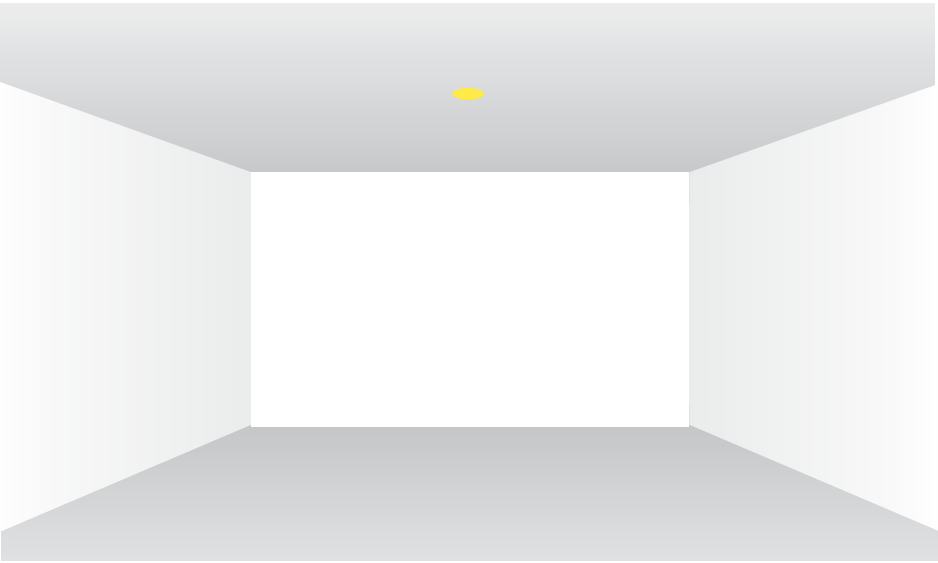

The ProTools series offers Plaster Trim and Bezel Trim fixed, wall wash and adjustable downlights with various cover options and accessories creating a flexible and versatile range of luminaires with a single consistent minimal appearance throughout.

A downlight can be used to deliver general light over a broad area, or a focused beam of concentrated light. Suitable for general area lighting in single units, grid patterns or groups as well as focused lighting and task oriented application.

This design guide provides the average light levels and beam spread which can be expected at task and floor level from a single downlight at the ceiling heights shown, and relative to the performance of each luminaire.

Refer to the diagram on the left, select your luminaire, ceiling height and distance, and read off the light level achieved in the table below.

Calculated on the following basis:

Reflectances

- Ceiling 70%
- Walls 50%
- Floor 20%


Maintenance factor

1.0

LED


- High Power
- 3000 Kelvin
- 90 CRI

How to create 'Even Illumination' in a space:




The beam angle of a single luminaire is defined by its Half Peak Intensity\*. We can use this to create even illumination in a space.

Arrange luminaires equally. Use the center of the luminaire as a base and ensure that neighboring beam spreads touch or slightly overlap.



\*The point at which the beam reaches half of the intensity relative to the center of its beam.

Average Light Levels

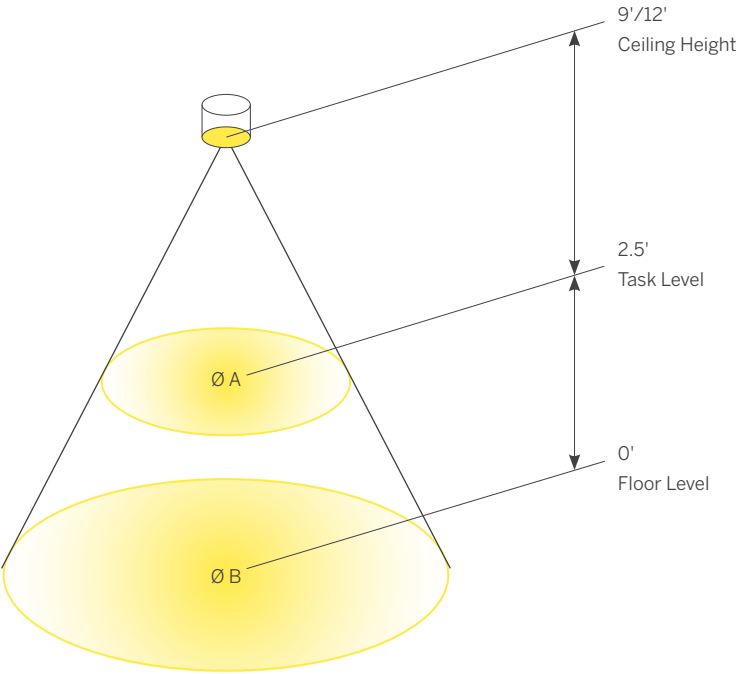

The diagram shows the average light level achieved, across an area the size shown, at the given distance from a single luminaire.


Product Code	Beam Spread	
WG 100SPTD, WG 100RPTD	-	90°
WG 100SPTDL, WG 100RPTDL	-	16°
	-	32°
	-	41°
WG 100RPTDLX, WG 100RPTDLX	-	16°
	-	32°
	-	41°
	-	8°

Calculation Results

Fixtures	Power	Beam	Accessory	Ceiling Height	Ø A	Task Level (2.5') Average	Ø B	Floor Level (0') Average
WG 100SPTD, WG 100RPTD	1512lm*	90°	Flush Lens	9.0'	Ø 13'	6.4 fc	Ø 18'	3.7 fc
				12.0'	Ø 19'	3.1 fc	Ø 24'	2.1 fc
WG 100SPTDL, WG 100RPTDL, WG 100SPTDLX, WG 100RPTDLX	2027lm*	16°	Open Aperture	9.0'	Ø 1.8'	102 fc	Ø 2.5'	54 fc
				12.0'	Ø 2.7'	49 fc	Ø 3.4'	31 fc
		32°	Open Aperture	9.0'	Ø 4.2'	33 fc	Ø 5.8'	18 fc
				12.0'	Ø 6.2'	16 fc	Ø 7.8'	11 fc
		41°	Open Aperture	9.0'	Ø 5'	24 fc	Ø 6.7'	13 fc
				12.0'	Ø 7.1'	12 fc	Ø 8.9'	8 fc
WG 100SPTDLX, WG 100SPTDLX	1638lm*	8°	Glare Shield/ Snoot	9.0'	Ø 0.9'	277 fc	Ø 1.2'	149 fc
				12.0'	Ø 1.3'	132 fc	Ø 1.7'	82 fc


Values in Foot Candles

4" ProTools D Downlight All Covers		4" ProTools DL Downlight All Covers		4" ProTools DL Adjustable All Covers		4" ProTools DLX Adjustable All Covers	
Product Details	26-37	Product Details	38-45	Product Details	46-57	Product Details	62-97



# 4" ProTools Multiple Downlight - Grid Set Out

WG 100SPTD, WG 100RPTD, WG 100SPTDL, WG 100RPTDL, WG 100SPTDLX, WG 100RPTDLX

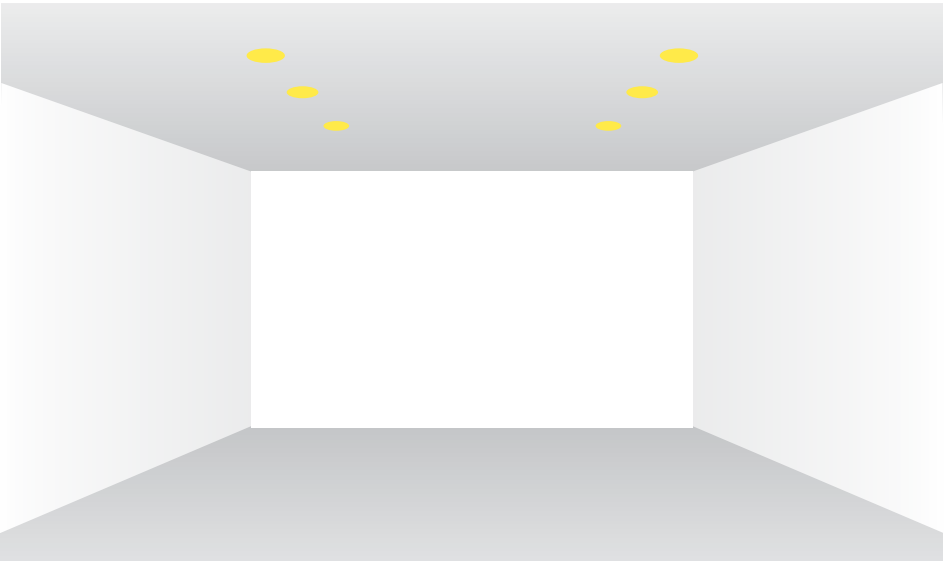

Plaster Trim and Bezel Trim fixed, wall wash and adjustable downlights with various cover options and accessories creating a flexible and versatile range of luminaires with a single consistent minimal appearance throughout.

A downlight can be used to deliver general light over a broad area, or a focused beam of concentrated light. Suitable for general area lighting in single units, grid patterns or groups as well as focused lighting and task oriented application.

This design guide provides the average light levels which can be expected at floor level from a grid of downlights at the ceiling heights shown, and relative to the performance of each luminaire.

Refer to the diagram on the left, select your luminaire, ceiling height and set out, and read off the light level achieved in the table below.

Calculated in a 20'x20' room size and on the following basis:

**Reflectances**

- Ceiling 70%
- Walls 50%
- Floor 20%


**Maintenance factor**

1.0

**LED**

- High Power
- 3000 Kelvin
- 90 CRI

Light Levels

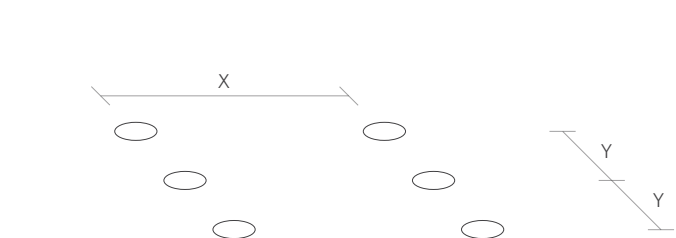

The diagram and table can be read to establish light levels achieved when luminaires are set out at the dimensions indicated, at the ceiling heights shown.


Product Code	Beam Spread	
WG 100SPTD, WG 100RPTD	-	90°
WG 100SPTDL, WG 100RPTDL	-	32°
	-	41°
WG 100SPTDLX, WG 100RPTDLX	-	32°
	-	41°

X = luminaire spacing center to center  
Y = distance between rows

4" ProTools D Downlight All Covers		4" ProTools DL Downlight All Covers		4" ProTools DL Adjustable All Covers		4" ProTools DLX Adjustable All Covers	
Product Details	26-37	Product Details	38-45	Product Details	46-57	Product Details	62-97

Calculation Results


Fixtures	Power	Beam	Accessory	Ceiling Height	Y	X Average Light Levels (fc)		
						4.0'	6.0'	8.0'
						4.0'	6.0'	8.0'
WG 100SPTD, WG 100RPTD	1512lm*	90°	Flush Lens	9.0'	4.0'	46	38	34
					6.0'	38	32	28
					8.0'	34	28	25
				12.0'	4.0'	35	30	27
					6.0'	30	27	23
					8.0'	27	23	21
WG 100SPTDL, WG 100RPTDL, WG 100SPTDLX, WG 100RPTDLX	2027lm*	32°	Open Aperture	9.0'	4.0'	33	32	29
					6.0'	32	30	28
					8.0'	30	28	26
				12.0'	4.0'	30	29	27
					6.0'	29	28	26
					8.0'	27	26	24
		41°	Open Aperture	9.0'	4.0'	32	31	28
					6.0'	30	29	27
					8.0'	28	27	25
				12.0'	4.0'	29	28	25
					6.0'	28	26	24
					8.0'	25	24	22



Values in Foot Candles

4" ProTools D Downlight - High Angle Illumination

WG 100SPTD, WG 100RPTD

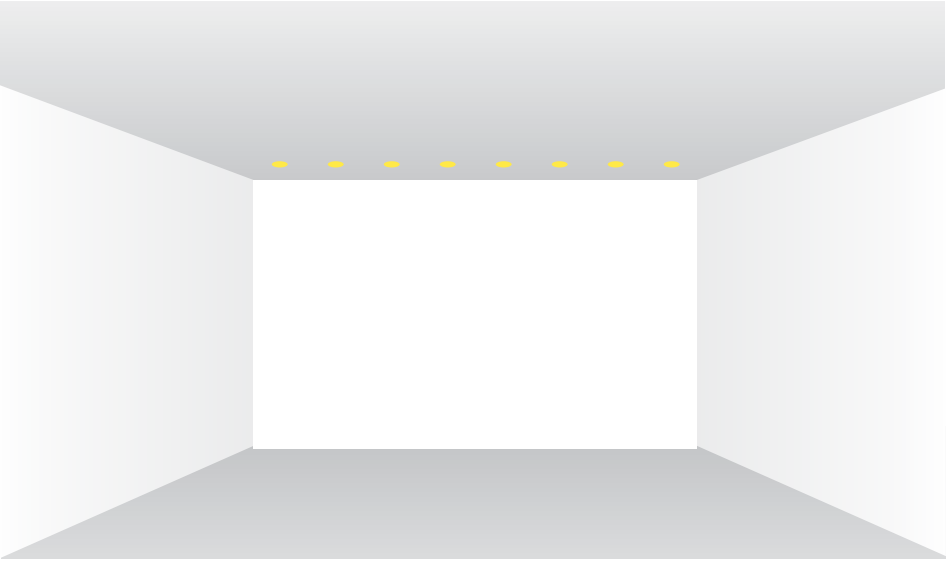


The ProTools D is a versatile luminaire with various trim, diffuser and cover options. When specified with a flush Satin Opal Diffuser, it has excellent high angle lighting performance. Although it is not intended as a dedicated wall wash luminaire, it can provide excellent illumination to nearby vertical surfaces as well as providing excellent ambient light throughout a space.

In this Design Guide, we provide you with all the information you need to work out exactly how much light can expect to deliver to a wall and floor below, relative to the distance from the surface and the center to center spacings of the luminaires.

Angle of Illumination / High Angle Lighting Performance


WG 100SPTD, WG 100RPTD

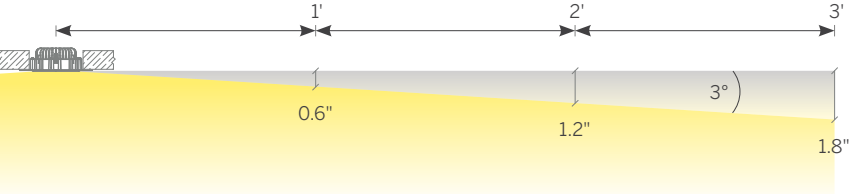

The diagrams show the point at which the contrast between the lit and the unlit perpendicular surface occurs as a soft transition line, at various distances from the luminaire.


Values in feet & inches

9' Ceiling, Typical 36" Offset, 36" Luminaire Spacing

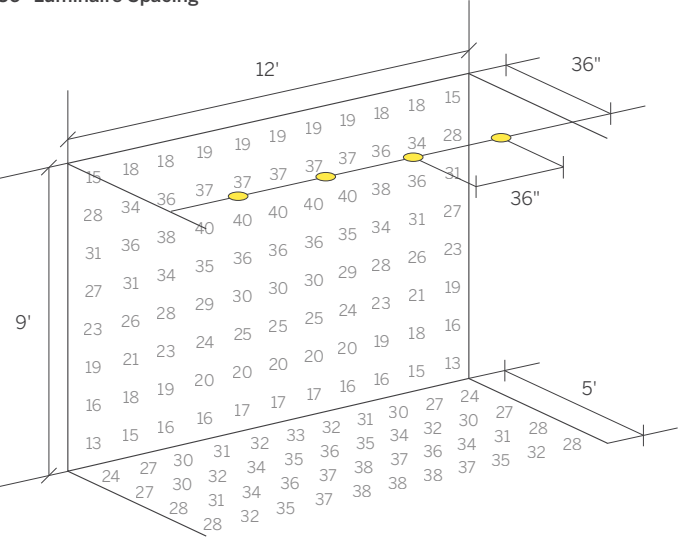

This page shows typical offsets and luminaire spacings and the resulting illumination which can be expected on the wall and floor. The following page shows results at different offsets and luminaire spacings.

12' Ceiling, Typical 36" Offset, 36" Luminaire Spacing

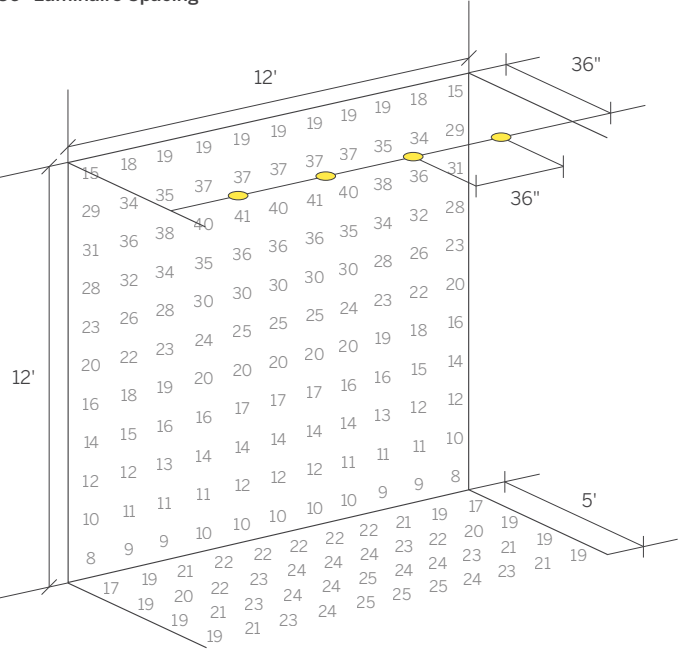

Values in Foot Candles

Calculated on the following basis:

Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	1512lm*	Custom Micro-Prismatic
Walls 50%			Wash Lens
Floor 20%			


index	4" ProTools D Downlight All Covers
Product Details	26-37




4" ProTools D Downlight - High Angle Illumination

WG 100SPTD, WG 100RPTD

9' Ceiling, Optimal 24" Offset,  
24" Luminaire Spacing

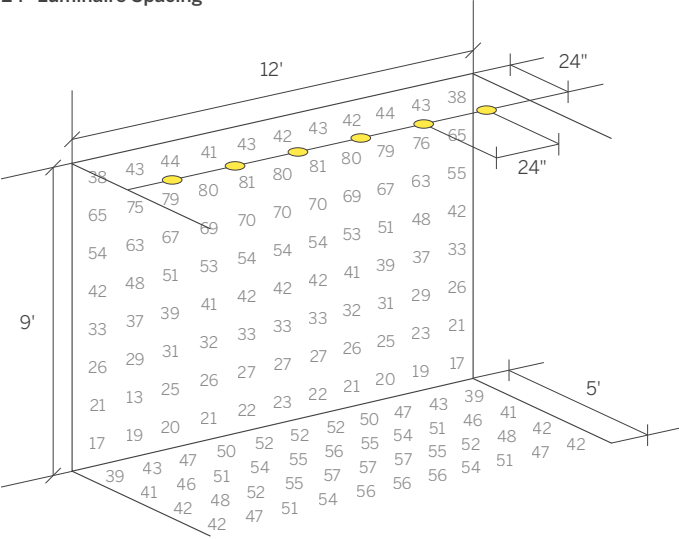


9' Ceiling, Optimal 30" Offset,  
30" Luminaire Spacing

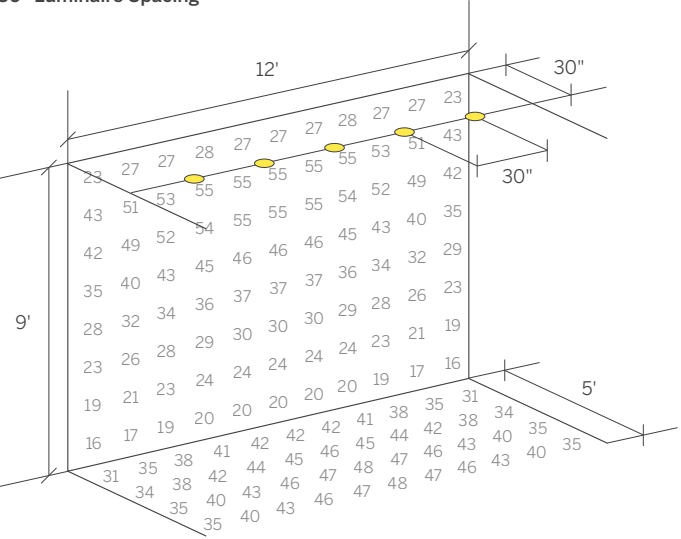


This page shows what we feel are the optimal offsets and luminaire spacings to achieve even illumination.

12' Ceiling, Optimal 24" Offset,  
24" Luminaire Spacing

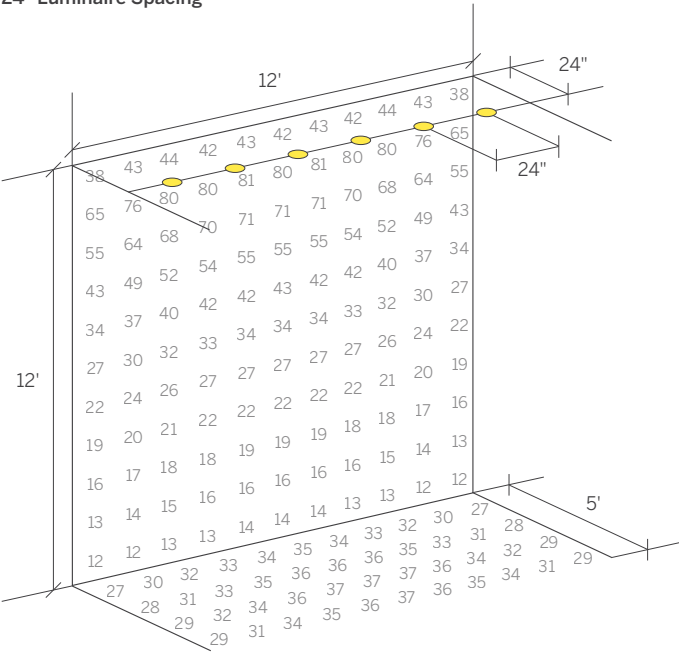

12' Ceiling, Optimal 30" Offset,  
30" Luminaire Spacing

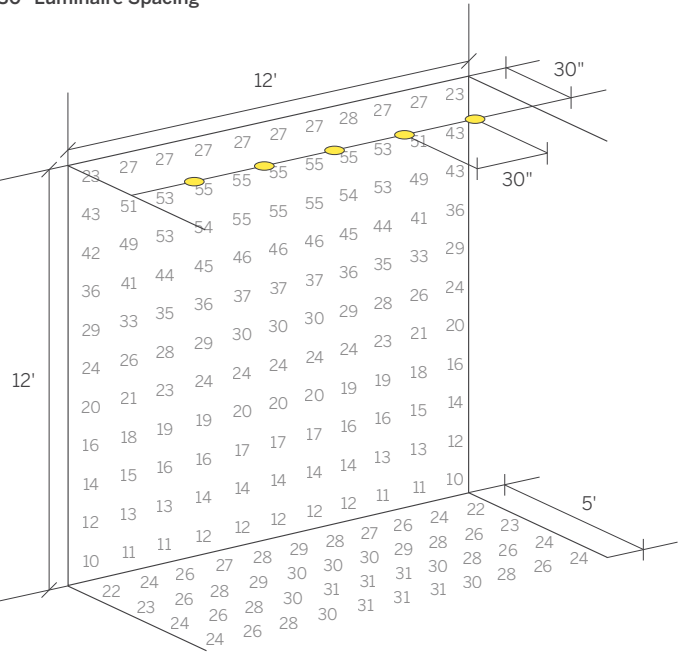

Values in Foot Candles


Values in Foot Candles

Calculated on the following basis:

Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	1512lm*	Custom Micro-Prismatic
Walls 50%			Wash Lens
Floor 20%			

index	4" ProTools D Downlight	
	All Covers	
	Product Details	26-37


4" ProTools DL Wall Wash
WG 100SPTDLWW-RPT, WG 100SPTDLWW-RBT, WG 100RPTDLWW-RPT, WG 100RPTDLWW-RBT

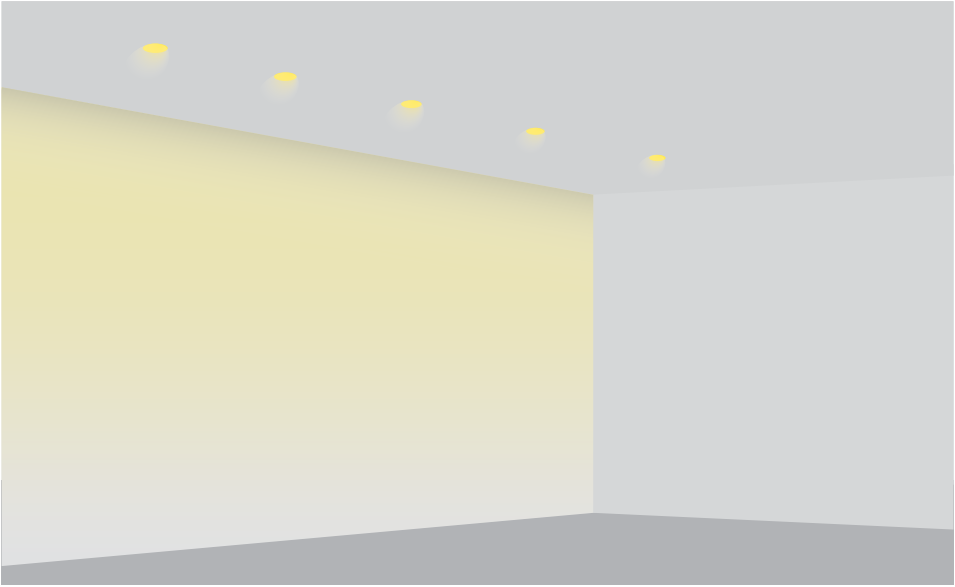

ProTools DL Wall Wash offers round and square dedicated wall wash luminaires for even illumination of a surface. They emit a wide, even beam of light which is directed towards the wall. Washlights need to be correctly positioned, both in terms of distance from the wall, and their relative distance to one another. This guide will help you get the best result.

The golden rule is 1:1 spacing between luminaires, set to match the distance they are offset from the surface to be lit. And that offset distance should ideally be one third of the overall surface height.

Of course, at Whitegoods we understand that constraints of modern construction requirements and commercial consideration mean that it is not always practical to apply these parameters. Therefore we have designed our wall wash luminaires to work as well as possible even when mounted close to the wall.

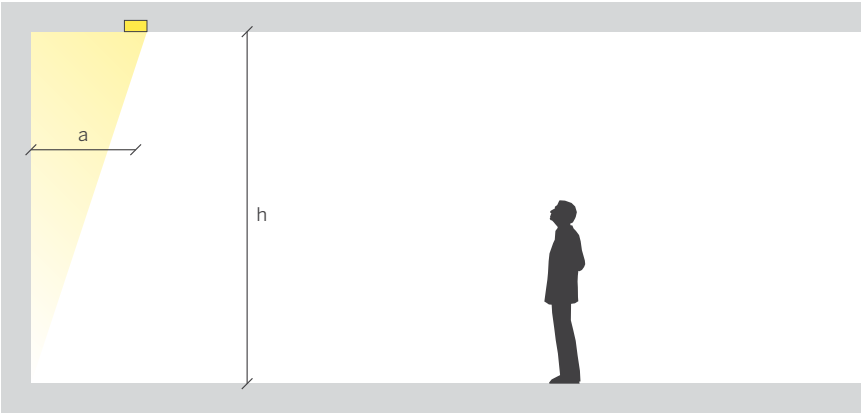


The height of the wall to be lit (h) will determine the best distance at which to position wall wash luminaires. A good 'rule of thumb' is to offset them by approximately one third of the wall height.


For optimum wall washing results use a 1:1 ratio between the offset (a) from the wall and the 'on center' luminaire spacings (b).

e.g. - if the wall is 9' high, then the luminaires will ideally be 3' away from the wall surface, so set them out at 3' on center - i.e. with 3' between each luminaire.

Also, where the wall meets an adjacent surface, space the last luminaire half the set out distance (b¹).

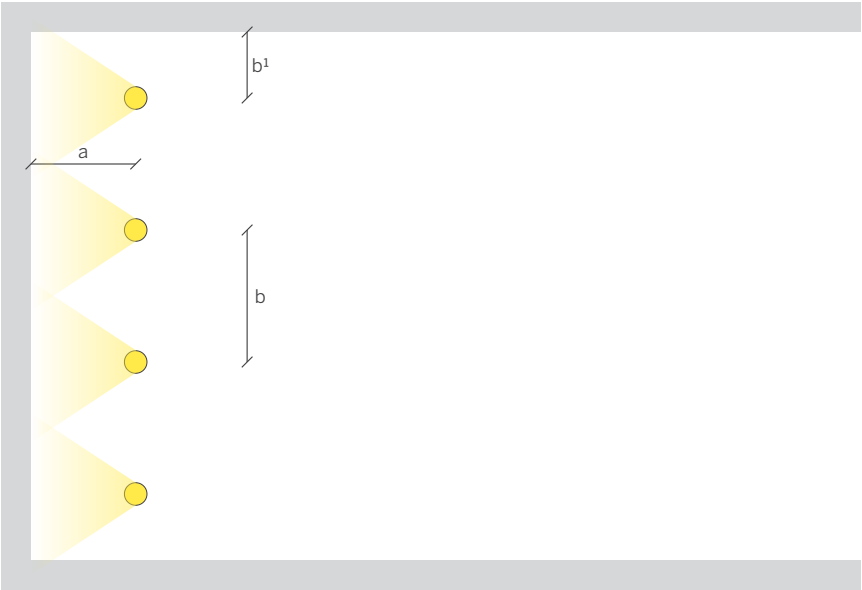


12' Ceiling, 36" Offset, 36" Luminaire Spacing

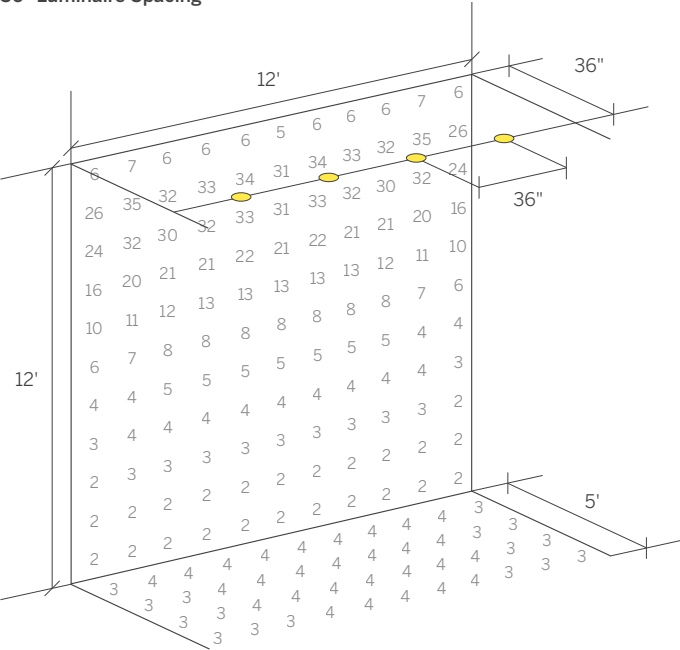


This page shows what we feel are the optimal offsets and luminaire spacings to achieve even illumination. The following page shows results at different offsets and luminaire spacings.

12' Ceiling, 24" Offset, 24" Luminaire Spacing

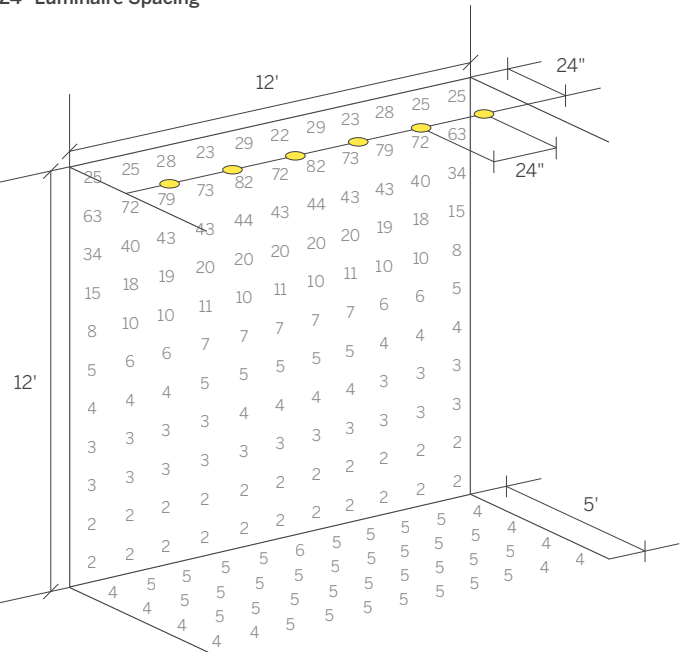

12' Ceiling, 18" Offset, 18" Luminaire Spacing

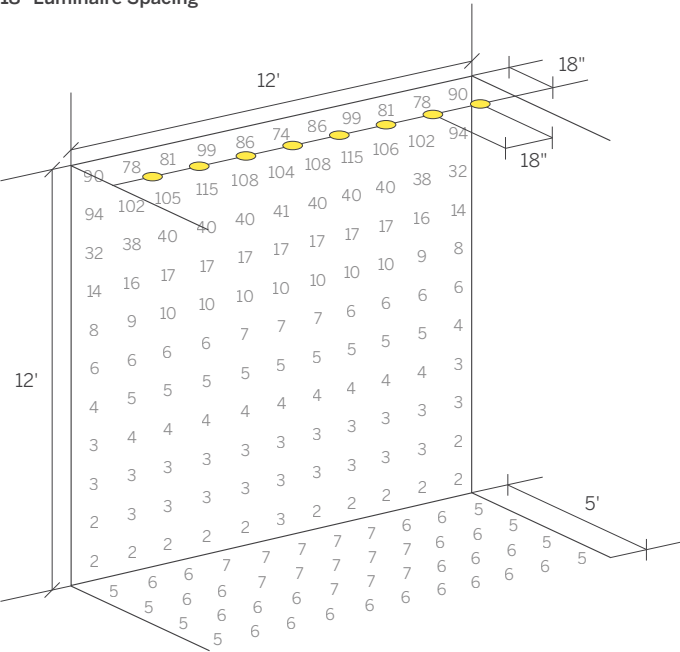

Values in Foot Candles


Calculated on the following basis:

Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	2027lm*	Custom Micro-prismatic
Walls 50%		3000 Kelvin	wash lens
Floor 20%		90 CRI	


index		4" ProTools DL Wall Wash All Covers	
		Product Details	58-61

4" ProTools DL Wall Wash
WG 100SPTDLWW-RPT, WG 100SPTDLWW-RBT, WG 100RPTDLWW-RPT, WG 100RPTDLWW-RBT


12' Ceiling, 36" Offset,
48" Luminaire Spacing

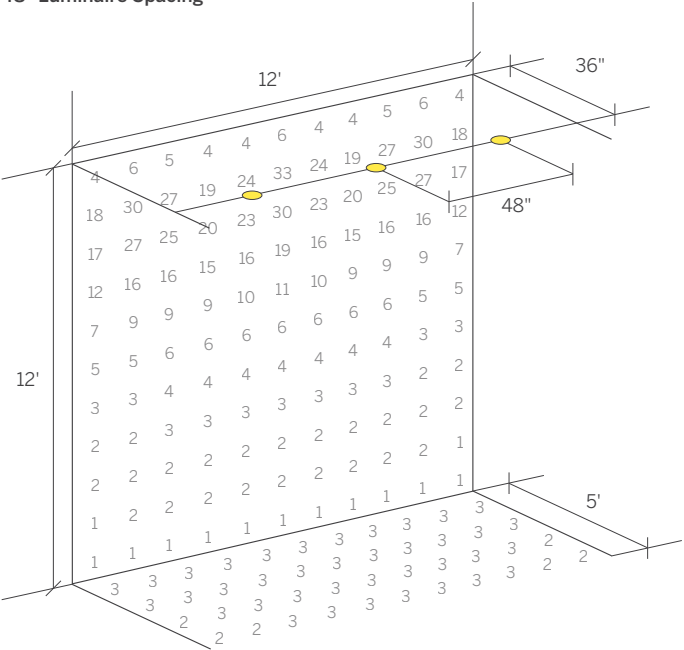


12' Ceiling, 24" Offset,
36" Luminaire Spacing

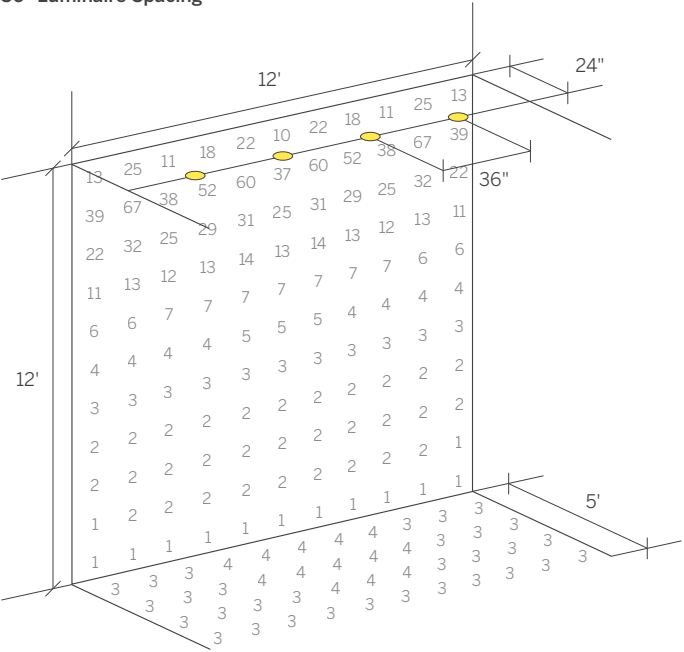


12' Ceiling, 18" Offset,
24" Luminaire Spacing

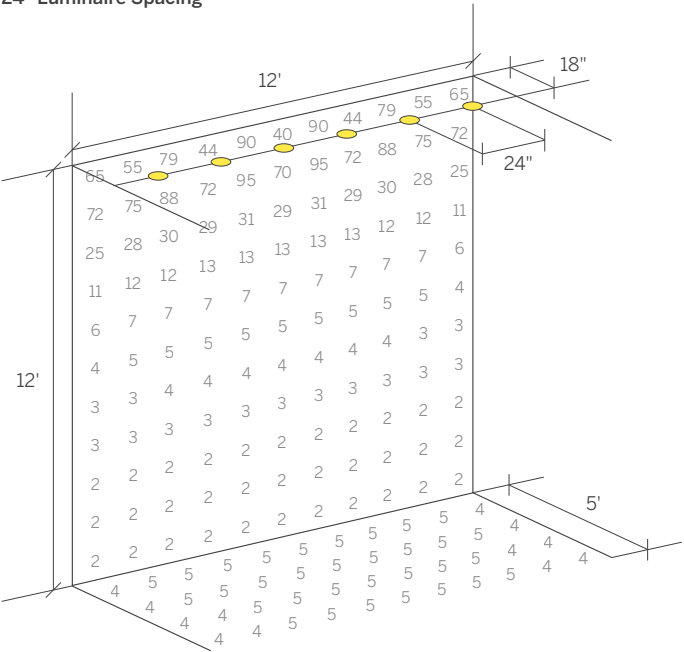


12' Ceiling, 36" Offset,
64" Luminaire Spacing

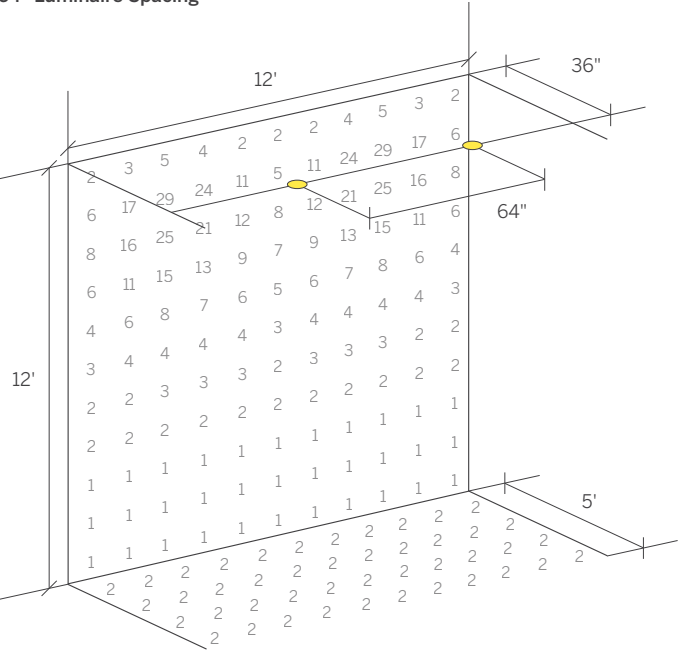

12' Ceiling, 18" Offset,
36" Luminaire Spacing

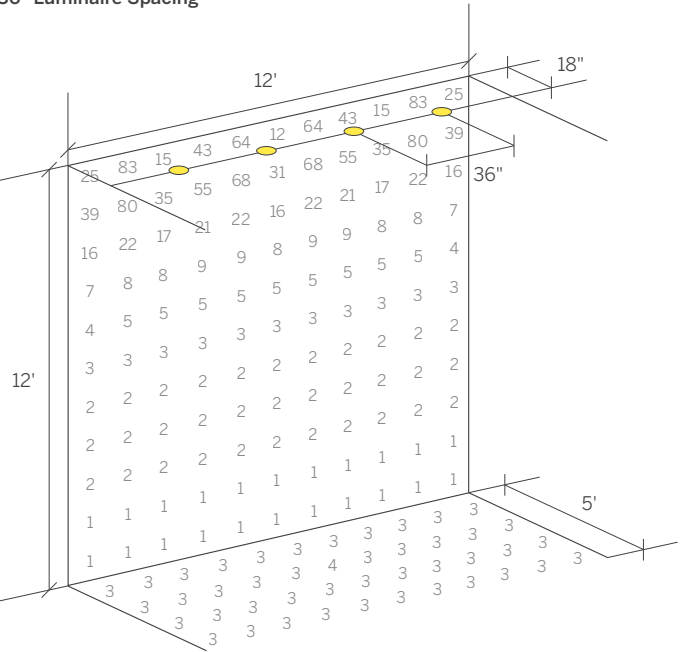

12' Ceiling, 24" Offset,
48" Luminaire Spacing

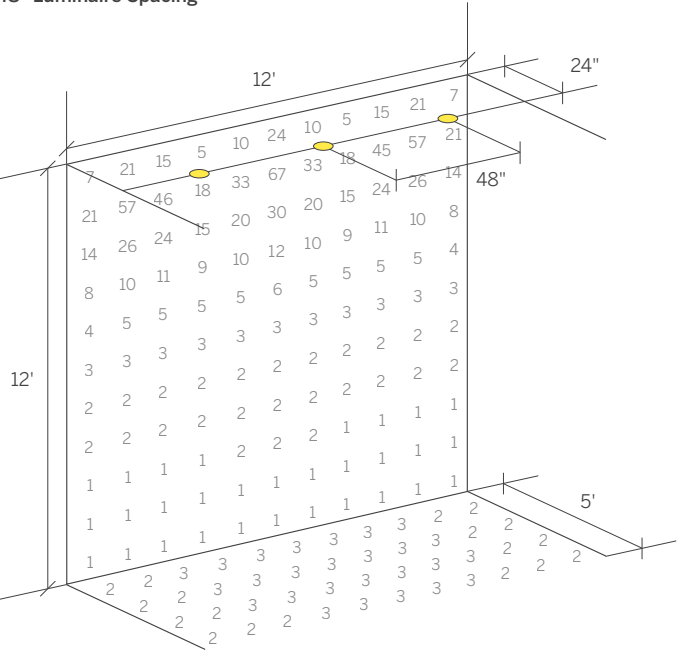

Values in Foot Candles

Values in Foot Candles

Calculated on the following basis:

Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	2027lm*	Custom Micro-prismatic
Walls 50%		3000 Kelvin	wash lens
Floor 20%		90 CRI	

index	4" ProTools DL Wall Wash All Covers
Product Details	58-61



Photo Credits

**page inside cover-1**  
project Robert L. Bogomolny Library  
location Baltimore, MD  
architect Behnisch Architekten  
lighting design MCLA  
photography David Mattiessen Photography

**page 12**  
project NCARB  
location Washington, DC  
architect OTJ Architects  
photography Trent Bell

**page 16-17**  
project Rockville Town Center  
location Rockville, MD  
architect R2L:Architects, PLLC  
photography Steve Lerum, Inter-lux

**page 18-19**  
project BMW Paris George V  
location Paris, France  
architect Carbondale  
lighting design Mindseye  
photography Roland Halbe

**page 20-21**  
project Rockville Town Center  
location Rockville, MD  
architect R2L:Architects, PLLC  
photography Steve Lerum, Inter-lux

**page 24-25**  
project Senova Dental Practice  
location London, UK  
architect FLACQ Architects  
photography Andy Spain

**page 99**  
project Rockville Town Center  
location Rockville, MD  
architect R2L:Architects, PLLC  
photography Steve Lerum, Inter-lux

**page inside back cover**  
project Robert L. Bogomolny Library  
location Baltimore, MD  
architect Behnisch Architekten  
lighting design MCLA  
photography David Mattiessen Photography



The application of light to the surfaces around us is a critical factor in our perception of any space.

When proper consideration is given to the architecture, function and the desired atmosphere, lighting can become a truly integrated part of the overall environment being created, often unseen although defining and enhancing the space.