


TECHNICAL SHEET

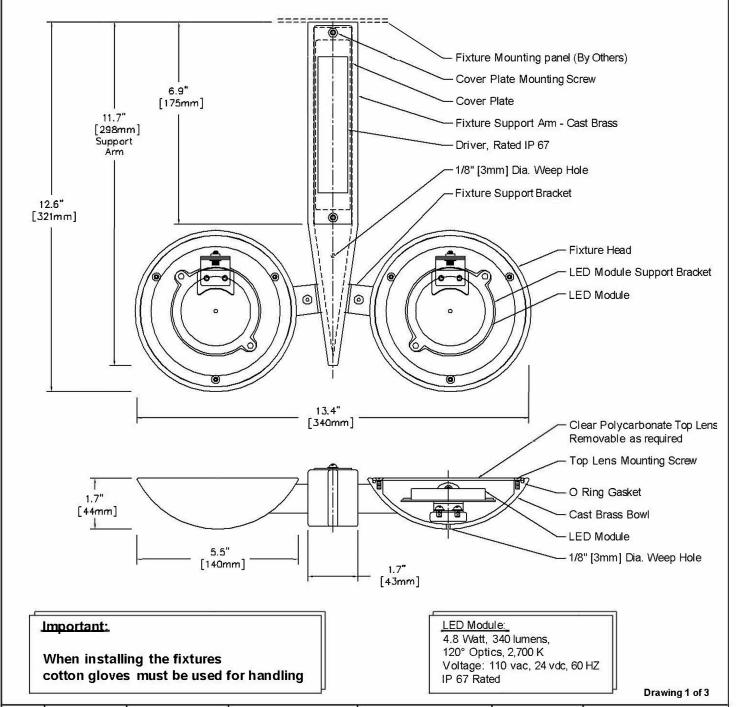

2534	W	1	СР	АВ	5	à
Series	Style	Lamp	Diffuser	Finish	Voltage	Options

W - Wall Sconce

1 - LED - As Noted

CP - Clear Polycarbonate

AB - Antique Brass To match C932 Bronze 1 - U 2 - 120 V 3 - 220 - 240 V

3 - 220 - 240 V 4 - 277 V 5 - 110 V


DM - Specify Dimming Ballas EM - Fluorescent emergency Battery - Remote MR - 50 Watt MR 16 Downlig


Other

inter•lux






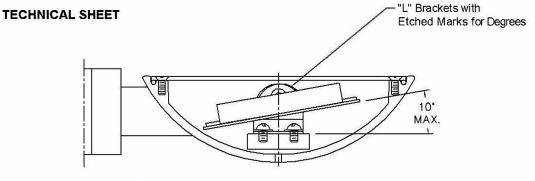

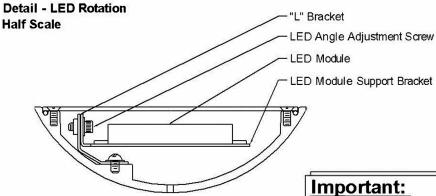

Detail - LED Rotation, 90° View **Half Scale**

When installing the fixtures cotton gloves must be used for handling

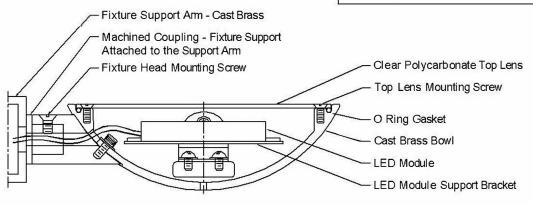

Detail - Cross Section - Support Bracket Half Scale

Drawing 2 of 3

2534	w	1	СР	АВ	5	à.
Series	Style	Lamp	Diffuser	Finish	Voltage	Options
	W - Wall Sconce	1 - LED - As Noted	CP - Clear Polycarbonate	AB - Antique Brass To match C932 Bronze	1 - U 2 - 120 V	DM - Specify Dimming Ballas

5 - 110 V


2 - 120 V 3 - 220 - 240 V 4 - 277 V

EM - Fluorescent emergency Battery - Remote MR - 50 Watt MR 16 Downlig

inter•lux





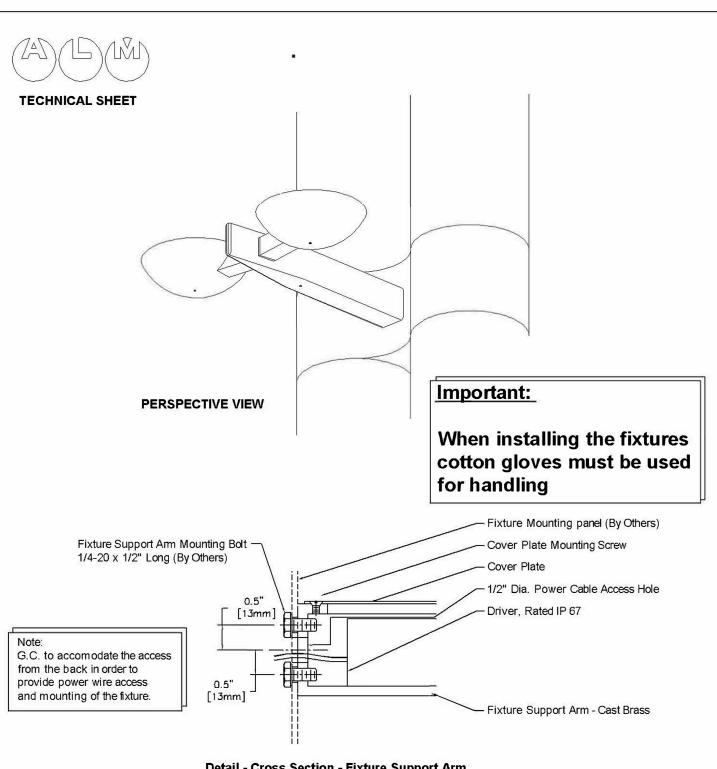

Detail - Cross Section - Fixture Support Arm Half Scale

Drawing 3 of 3

MR - 50 Watt MR 16 Downlig

2534	w	1	CP	АВ	5	*
Series	Style	Lamp	Diffuser	Finish	Voltage	Options
	W - Wall Sconce	1 - LED - As Noted	CP - Clear Polycarbonate	AB - Antique Brass To match C932 Bronze	1 - U 2 - 120 V 3 - 220 - 240 V	DM - Specify Dimming Ballas EM - Fluorescent emergency Battery - Remote

inter•lux



4 - 277 V

5 - 110 V

