


Orma Trim Semi-Flush Adjustable | Up-Light | powerLED



C.C. 4W DC - 350mA		Cct	lm S - D	Optic
Steel Alu	E81199	M 2700	490 - 272	15 Spot (22°)
Brass Alu	E82521	W 3000	490 - 272	30 Flood (29°)
		N 4000	529 - 294	60 W.Flood (48°)



Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures


C.V. 5W DC - 24 VDC		Cct	lm S - D	Optic
Steel Alu	E81200	M 2700	490 - 272	15 Spot (22°)
Brass Alu	E82522	W 3000	490 - 272	30 Flood (29°)
		N 4000	529 - 294	60 W.Flood (48°)

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



Orma Trim Semi-Flush Adjustable | Up-Light | arrayLED

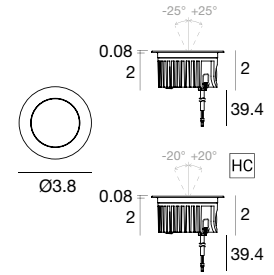

C.C. - 8W DC - 220mA		Cct	lm S - D	Optic
Steel Alu	E81201	M 2700	1080 - 858	15 Spot (15°)
Brass Alu	E82523	W 3000	1126 - 894	30 Flood (31°)
		N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	lm S - D	Optic	
Steel Alu	E82456	M 2700	1080 - 619	15 Spot -
Brass Alu	E82934	W 3000	1126 - 646	30 Flood -
		N 4000	1188 - 681	60 W.Flood -

Power supply options (remote only)


ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

C.V. 9W DC - 24 VDC		Cct	lm S - D	Optic
Steel Alu	E81202	M 2700	1193 - 955	15 Spot (15°)
Brass Alu	E82524	W 3000	1244 - 997	30 Flood (31°)
		N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	lm S - D	Optic	
Steel Alu	E82457	M 2700	1193 - 687	15 Spot -
Brass Alu	E82935	W 3000	1244 - 716	30 Flood -
		N 4000	1313 - 756	60 W.Flood -


Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
 Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
 NOT suitable for submersible installations.
 Inter-lux reserves the right to make technical changes without notice.

Orma Trim Semi-Flush Adjustable | Up-Light | arrayLED

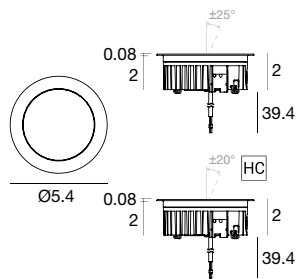

C.C. - 12W DC - 350mA		Cct	lm S - D	Optic
Steel/Alu	E81203	M 2700	1724 - 1317	15 Spot (22°)
Brass/Alu	E82525	W 3000	1724 - 1317	30 Flood (34°)
		N 4000	1854 - 1417	60 W.Flood (61°)


HC		Cct	lm S - D	Optic
Steel/Alu	E82458	M 2700	1724 - 935	15 Spot -
Brass/Alu	E84308	W 3000	1724 - 935	30 Flood -
		N 4000	1854 - 1005	60 W.Flood -

Power supply options (remote only)


ECO30W-350
0-10V EldoLED
ECOdrive 30W
for 1 fixture

SOLO50W-350
0-10V EldoLED
SOLOdrive 50W
for 1-2 fixtures

SOLO100W-350
0-10V EldoLED
SOLOdrive 100W
for 1-4 fixtures



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

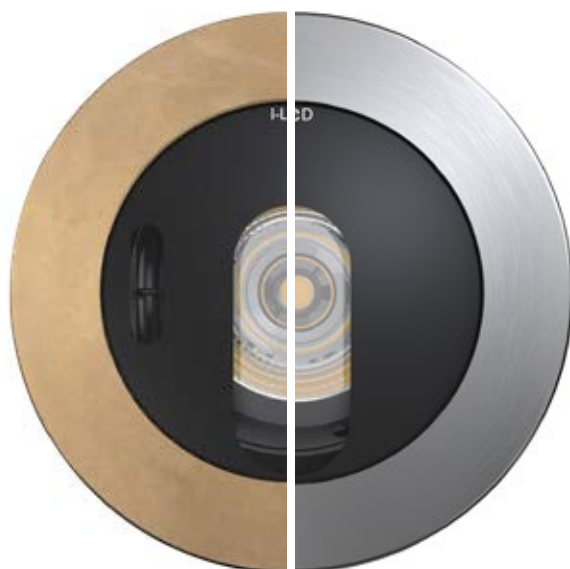

Orma Trim Semi-Flush Adjustable Brass

Orma Trim Semi-Flush Adjustable Steel