




ProTools 60 Linear Downlight

Wall / Mullion Mount


inter•lux

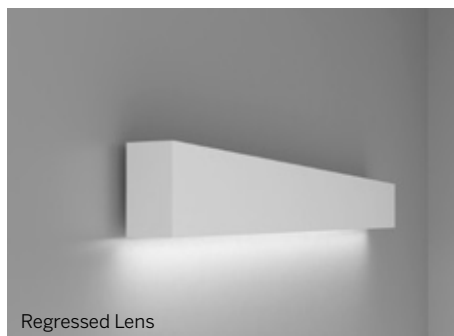


Recessed Micro-prismatic Lens (RML)



Recessed Louver (RLW, RLB)



Regressed Opal Lens (ROL)



Recessed Elliptical Optic (REO)

Ordering Information

Model	Fixation	Pattern	Length ²	CRI/CCT	Optic	Beam	Power ⁴	Driver ⁵	Housing Finish ⁶	Reflector Finish ⁶	Options
WG-60PTL											
WG-60PTL	WM MM	S P ¹ PZ ¹	24 48 96 XX ³	927 930 935 940 TW	RML ROL RLW ³ RLB ³ REO	80 105 35 50 20x40	P1 P2 P3 P4	E1 L1 L0 A3 PoE BT TQ DMX	W B S F	W B S F	EM EW

Luminaire

- 2.4" aperture, wall mount downlight with multiple distributions
- Specialized mounting bracket to mount directly to 2.5" window mullion
- Standard and tailored run lengths, including corners
- Modularity of insert modules for ultimate design flexibility
- Extreme brightness control eliminates disturbing glare
- Consistent LED technology throughout the Whitegoods product range
- Flexible design allows exact wall-to-wall dimensions
- Flicker-free full range dimming with standard driver (Eldoled)

Fixation

- WM = Wall Mount
- MM = Mullion Mount

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length²

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"³

CRI/CCT

- 90+ CRI
- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K

Optic

- RML = Recessed micro-prismatic lens
- ROL = Regressed opal lens
- RLW = Recessed louver white (supplied with white reflectors standard)³
- RLB = Recessed louver black (supplied with black reflectors only)³
- REO = Recessed elliptical optic

Beam

- 80 = 80° (RML)
- 105 = 105° (ROL)
- 35 = 35° (RLW, RLB)
- 50 = 50° (RLW, RLB)
- 20x40 = 20x40° (REO)

Power⁴

- Lens (ROL/RML)
- P1 = 3W/ft (300/330 lm/ft)
- P2 = 6W/ft (565/620 lm/ft)
- P3 = 10W/ft (870/950 lm/ft)
- P4 = 15W/ft (1280/1400 lm/ft)
- Tuneable White (ROL/RML)
- P2 = 6W/ft (274-281/299-307 lm/ft)
- P3 = 10W/ft (405-426/442-466 lm/ft)
- Louver (RLW/RLB/RNO)
- P2 = 6W/ft (890/850/940 lm/ft)
- P3 = 10W/ft (1340/1280/1200 lm/ft)
- P4 = 15W/ft (1920/1835/2000 lm/ft)

Driver⁵

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- L0 = Lutron 0.1% dimming, Ecosystem (120-277V)
- A3 = Advance 1% dimming, 0-10V (347V ONLY)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi
- TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)
- DMX = EldoLED 0.1% dimming DMX (120-277V)

Housing Finish⁶

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, Tiger Drylac 44/90053
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

Reflector Finish⁶

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard with RLW)
- B = Black, 15% gloss, Tiger Drylac 44/90053 (standard with RLB)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

Options

- EM = Emergency (remote)
- EW = End wall bracket

- 1 See pattern spec sheet.
- 2 Individual fixture lengths less than 2' may require remote driver.
- 3 Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 12" increments for continuous light. Louver supplied in 12" increments, balance of the run will have recessed blank covers on ends.
- 4 Values are approximate delivered lumens for 3000K LEDs; refer to product data sheet for additional details. For RLB/RLW, delivered lumens with 50 degree beam.
- 5 See power supply page for details.
- 6 See Tiger Drylac color chart: inter-lux.com/tiger