
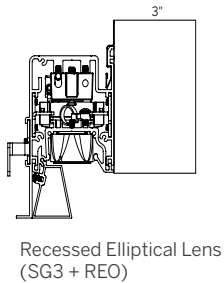


ProTools 60 Linear Soft Graze

Recessed

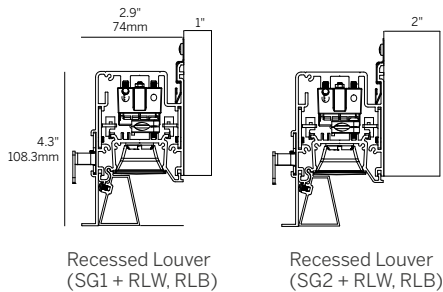

Ordering Information

Model	Fixation	Pattern	Length ²	CRI/CCT	Optic	Beam	Power ⁴	Driver ⁵	Housing Finish ⁶	Options
WG-60PTLSG1	RPT	S	24	927	RLW ³	WG	P2	E1	W	CP
WG-60PTLSG2	RBT	P ¹	48	930	RLB ³		P3	L1	S	EM
WG-60PTLSG3	RG9	PZ ¹	96	935	REO		P4	L0	F	NYC
	RG15		XX ³	940				A3 POE BT		TF

Luminaire

- 2.4" aperture, integrated solution that is compatible with all ceiling types
- Standard and tailored run lengths, including corners
- Graze to 30' wall height
- Soft Graze to vary light center from the wall
- Extreme brightness control and the elimination of disturbing glare
- Consistent LED technology throughout the Whitegoods product range
- Easy to install housing allows the wall to continue above the finished ceiling
- Flexible design allows exact wall-to-wall dimensions
- Flicker-free full range dimming with standard driver (Eldoled)

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling
- RG9 = Recessed trim for 9/16" grid
- RG15 = Recessed trim for 15/16" grid

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length²

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"³

CRI/CCT

- 90+ CRI
- 927 = 2700K
 - 930 = 3000K
 - 935 = 3500K
 - 940 = 4000K

Optic

- RLW = Recessed louver white (supplied with white reflectors standard)³
- RLB = Recessed louver black (supplied with black reflectors only)³
- REO = Recessed elliptical optic

Beam

- WG = Wall Graze

Power⁴

Static White

- P2 = 6W/ft (675 lm/ft)
- P3 = 10W/ft (1020 lm/ft)
- P4 = 15W/ft (1460 lm/ft)

Driver⁵

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- L0 = Lutron 0.1% dimming, Ecosystem (120-277V)
- A3 = Advance 1% dimming, 0-10V (347V ONLY)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi

Housing Finish (Includes kick reflector)⁶

- W = White, 15% gloss, Tiger Drylac 49/11350
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

Options

- CP = Chicago Plenum Rated
- EM = Emergency (remote)
- NYC = 6' whip per run
- TF = Top feed

- 1 See pattern spec sheet.
- 2 Individual fixture lengths less than 2' may require remote driver.
- 3 Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 12" increments for continuous light. Louver supplied in 12" increments, balance of the run will have recessed blank covers on ends.
- 4 Values are approximate delivered lumens for 3000K LEDs; refer to product data sheet for additional details. For RLB/RLW, delivered lumens with 50 degree beam.
- 5 See power supply page for details.
- 6 See Tiger Drylac color chart: inter-lux.com/tiger