


CIRCOLO LIGHT + ACOUSTIC


Housing: Aluminum profile with integrated opal diffuser and fabric covering as a light and acoustic diffuser.
Design: SATTLER

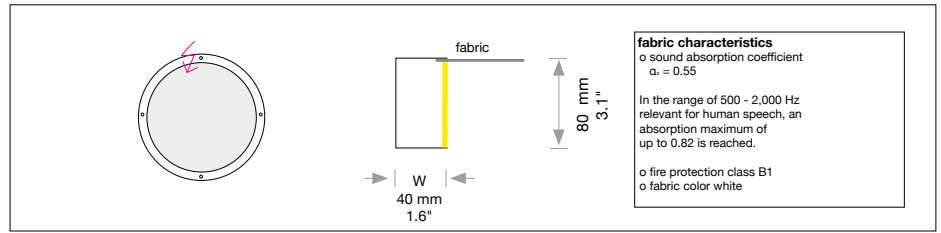


	Size: Ø x W x H mm	Inches	LED Watt	Lumen ¹	Weight kg / lbs ²	Item No.	LED Row 1	Dimming	LED Row 2	Finish	Power supply cable	Mounting version
Sizes	Ø 750 / 29.5"	H 80 / 3.1" B 40 / 1.6"	48	3009	8 / 17.6	1200	x x .	x x .	x x .	x x .	x x x .	x
	Ø 900 / 35.5"	H 80 / 3.1" B 40 / 1.6"	57	3641	10 / 22.0	1201	x x .	x x .	x x .	x x .	x x x .	x
	Ø 1320 / 51.9"	H 80 / 3.1" B 40 / 1.6"	83	5442	20 / 44.0	1202	x x .	x x .	x x .	x x .	x x x .	x
	Ø 1600 / 62.9"	H 80 / 3.1" B 40 / 1.6"	101	6614	25 / 55.1	1203	x x .	x x .	x x .	x x .	x x x .	x
	Ø 1800 / 70.8"	H 80 / 3.1" B 40 / 1.6"	114	7256	30 / 66.0	1204	x x .	x x .	x x .	x x .	x x x .	x
LED 24V		Standard: Neutral-white	4000 K			x x x .	40.	x x .	x x .	x x .	x x x .	x
		Optional:	Natural-white	3500 K		x x x .	35.	x x .	x x .	x x .	x x x .	x
			Warm-white	3000 K		x x x .	30.	x x .	x x .	x x .	x x x .	x
			Extra warm-white	2700 K		x x x .	27.	x x .	x x .	x x .	x x x .	x
			Tunable white*	2700 - 6500 K		x x x .	80.	x x .	x x .	x x .	x x x .	x
			RGB color control*			x x x .	60.	x x .	00.	x x .	x x x .	x
			RGB + Neutral-White*	4000 K		x x x .	60.	x x .	40.	x x .	x x x .	x
			*Only available with DMX. Combinations up to two rows of LED possible.									
Dimming		Standard: 0 - 10 V				x x x .	x x .	51.	x x .	x x .	x x x .	x
		Optional:	Lutron EcoSystem**			x x x .	x x .	91.	x x .	x x .	x x x .	x
			DMX			x x x .	x x .	31.	x x .	x x .	x x x .	x
			First digit indicates Dimming protocol. Second digit indicates number of rows of LED. Codes shown with 1x row of LED (Standard). For 2x rows of LED replace the second digit accordingly.									
			**Lutron EcoSystem driver must be ordered separately and remote mounted with mounting versions A, G, K, R.									
Finish		Standard:	12 white, powder coated, similar to RAL 9003	Optional (Powder coated):	10 black fine textured	11 white, similar to RAL 9010	30 anthracite fine textured	33 sand silver fine textured	34 bronze satined			
					35 gold	36 brass	37 bronze fine textured	38 copper				
				Optional (Premium):	22 aluminum polished	27 brush-finished aluminum				x x x .	x x .	x x .
Power supply cable		Standard:	Z 70 silver	Optional:	Z 71 white	Z 73 black						
			Without power cable									
			000 Current-carrying F, R, T, K							x x x .	x x .	x x .

CIRCOLO LIGHT + ACOUSTIC


Housing: Aluminum profile with integrated opal diffuser and fabric covering as a light and acoustic diffuser.
Design: SATTLER

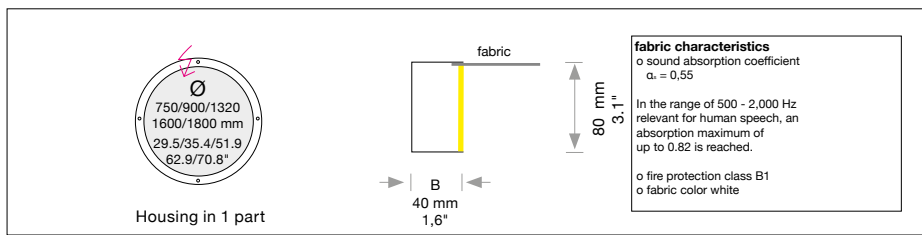


Mounting Version




4-point suspension with external power supply unit in suspended ceiling.




4-point suspension with external power supply unit in separate canopy.




Suspension through canopy.




4 current-carrying steel cables suspension through canopy. Only 1 stripe LED possible. Not in combination with RGB.




Suspension with current-carrying steel cables and cavity wall box. Includes 1 ceiling fixation per suspension cable. Not in combination with RGB.




Suspension with pendant canopy PB 375 / PB 652 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1". Recommended ceiling height greater than 25 ft.




Suspension with pendant canopy PB 375 / PB 652 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1". Not in combination with RGB. Recommended ceiling height greater than 25 ft.



Direct ceiling mounting 50 mm / 1.9" with external power supply unit in suspended ceiling.



Direct ceiling mounting (white) 50 mm / 1.9" with external power supply unit in separate canopy.



Suspension point as clamping unit with 4 current-carrying cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power supply cable	Mounting version
X X X.	X X.	X X.	X X.	X X.	X X X	-

A, B, G, H, R = Distance of external power supply unit to light fixture max. 10m / 394"

S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000 mm / 197" ; Version F, R, S, T 5000 / 3000 mm / 197"/118" and/or power supply cable 5000 mm / 197"

Complete order number

Power supply units: (1 LED rows)			
Type / Size mm / inch	L x W x H	Included with Mounting version	Protective rating
DE 1F	363 x 143 x 56 mm / 14.2 x 5.6 x 2.2"	A, G, R, K (up to Ø 1320 mm)	IP 20
DE 2F	363 x 283 x 56 mm / 14.2 x 11.1 x 2.2"	A, G, R, K (up to Ø 1800 mm)	IP 20


Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**

Canopy: (1 LED row)			
Type / Size mm / inch	Ø cover plate / body / H	Included with Mounting version	Protective rating
DB 290	Ø 290 / 260 / 60 mm / 11.4 x 10.2 / 2.3"	B, E, F, H (up to Ø 1320 mm)	IP 20
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B, E, F, H (up to Ø 1800 mm)	IP 20
PB 375	Ø 90 H 375 mm / 3.5 x 14.8"	S, T (up to Ø 1320 mm)	IP 20
DB 652	Ø 90 H 652 mm / 3.5 x 25.7"	S, T (up to Ø 1800 mm)	IP 20
DB 145	Ø 145 / 133 / 55 mm / 5.7 x 5.2 / 2.2"	K	IP 20

Ø body 90 mm / 3.5"

Color: 12 white, similar RAL 9003, contact factory for other finishes
Canopy mounts to 4" octagonal junction box.

Optional



Ceiling fixation included with mounting versions A, G

200. 00. 00. 00. 12 (white)

Consisting of a cavity ceiling box with 80 mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.