
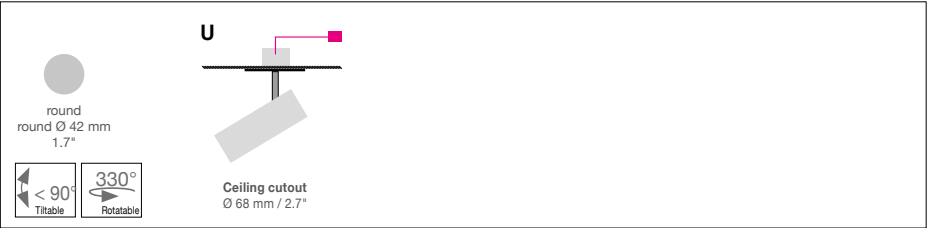









EVOLUTION
SPOT M

Housing: Spotlight, solid Aluminum housing, 330° hinge, 24° and 38°
Design: Ulrich Sattler

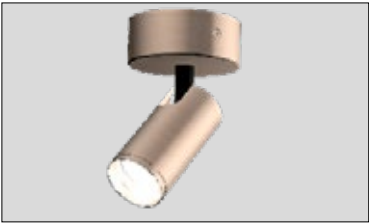

| | Size: Ø / L mm | Inches | LED Watt | Lumen¹ | Weight kg/lbs² | Beam angle | Item No. | LED direct | Dimming | LED indirect | Finish | Power supply cable | Mounting version |
|------------------|--|--|--------------------------------------|---------------------------|---------------------------------|--|------------------|------------|--------------|--------------|--------------|--------------------|------------------|
| Size | Ø 60 / L 157 mm | Ø 2.4 / L 6.2" | 17 | 1587 | 0.5 / 1.1 | 24° | 1789. | x x. | x x. | x x. | x x. | x x x. | x |
| | Ø 60 / L 157 mm | Ø 2.4 / L 6.2" | 17 | 1587 | 0.5 / 1.1 | 34° | 1790. | x x. | x x. | x x. | x x. | x x x. | x |
| LED 24V |  CRI > 90 Mac Adam 3 SELV L80 B10 50,000 hours | Standard: Warm-white | 3000 K | | | | x x x. | 30. | x x. | x x. | x x. | x x x. | x |
| | | Optional: Neutral-white Extra warm-white | 4000 K 2700 K | | | | x x x. x x x. | 40. 27. | x x. x x. | x x. x x. | x x. x x. | x x x. x x x. | x x |
| Dimming |  | Standard: 0 - 10 V | | | | | x x x. | x x. | 11. | 00. | x x. | x x x. | x |
| Finish |  | Standard: 66 bronze anodized brushed | Optional: 60 silver anodized brushed | 62 black anodized brushed | 65 champ. gold anodized brushed | 12 white, powder coated, similar to RAL 9003 | x x x. | x x. | x x. | x x. | -- | x x x. | x |
| Mounting version |  | Standard: Cover Ø 80 mm / 3.1" Ceiling cutout 68 mm / 2.7" Power supply unit in suspended ceiling. | | | | | x x x. | x x. | x x. | x x. | x x. | x x x. | -- |

| | | | | | | | | | |
|---|---------------|---|----------|-------------------|--|--|--|--|--|
| Canopy: | | | | | | | | | |
| Type | | Included with Mounting version | | Protective rating | | | | | |
|  | DA 125 | Cover Ø 125mm / 4.9" Ceiling cutout Ø 101.6mm / 4" Power supply unit in suspended ceiling same Color as luminaire | U | IP 40 |  | | | | |
| | | | | | Complete order number | | | | |



W
H
L

**Remote driver required
ordered separately:**

Type / Size mm / inch
L x W x H

0-10V:
ECO30W-500 13.25" x 5" x 2.25"

Input voltage for all external power supply units and canopy is **120-277 VAC 50-60 Hz**