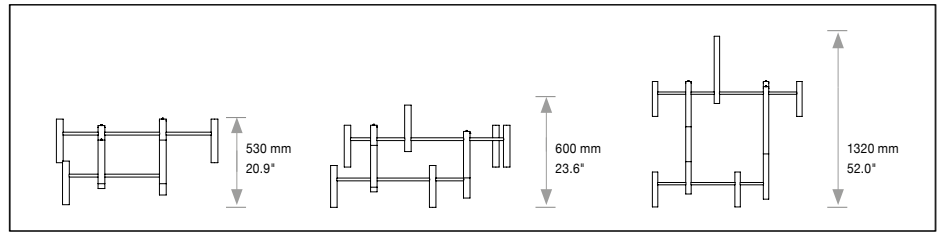










## EVOLUTION (HB) S / M / Vertical


Housing: Pendant light, solid Aluminum housing  
Design: Ulrich Sattler | Michael Schmidt, Code2design



SIZE	Size: L x B x H mm Size: L x W x H Inches	LED Watt	Lumen <sup>1)</sup> direct / indirect	Weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finish	Power supply cable	Mounting version
	<b>EVOLUTION - S</b> 1000 x 1000 x 530 mm 39.4 x 39.4 x 20.9"	47	4300 10 direct cylinders	8.0 / 17.64	<b>1780.</b>	x x.	x x.	x x.	x x.	x x x.	x
	<b>EVOLUTION - M</b> 1258 x 1158 x 600 mm 49.5 x 45.6 x 23.6"	81	6450 15 direct cylinders	12.0 / 26.46	<b>1781.</b>	x x.	x x.	x x.	x x.	x x x.	x
	<b>EVOLUTION - Vertical</b> <b>1 element</b> 1158 x 1158 x 1320 mm 45.6 x 45.6 x 52.0"	65	5160 12 direct cylinders	16.0 / 35.27	<b>1782.</b>	x x.	x x.	x x.	x x.	x x x.	x
	<b>2 elements vertically suspended*</b> 1158 x 1158 x 2740 mm 45.6 x 45.6 x 107.9"	157	10320 / 2150 24 direct cylinders/5 indirect cylinders	32.0 / 70.54	<b>1783.</b>	x x.	x x.	x x.	x x.	x x x.	x
	<b>3 elements vertically suspended*</b> 1158 x 1158 x 4160 mm 45.6 x 45.6 x 163.8"	248	15480 / 4300 36 direct cylinders/10 indirect cylinders	48.0 / 105.81	<b>1784.</b>	x x.	x x.	x x.	x x.	x x x.	x
* Minimum distance of 100 mm between elements included.											
	<b>Warm-white</b>		<b>3000 K</b>		x x x.	<b>30.</b>	x x.	x x.	x x.	x x x.	x
	<b>0-10V</b>				x x x.	x x.	<b>51.</b>	<b>00.</b>	x x.	x x x.	x
<b>Finish</b>	 <b>65</b> champ. gold anodized				x x x.	x x.	x x.	x x.	<b>65.</b>	x x x.	x
<b>Power supply cable</b>					x x x.	x x.	x x.	x x.	x x.	<b>Z80.</b>	x
	4-point suspension with external power supply in suspended ceiling		Distance of remote power supply unit to light fixture max. 10 m / 394" EVOLUTION-S and EVOLUTION-M: Including steel cable suspension 5 m / 197" and power supply cable 5 m / 197". EVOLUTION-Vertical: Including steel cable suspension 10 m / 394" and power supply cable 10 m / 394".		x x x.	x x.	x x.	x x.	x x.	x x x.	<b>A</b>

**DE1F Power supply**

Input voltage for all remote power supply unit is  
**90-277 VAC 0/50/60 Hz**

	---	<b>30.</b>	<b>01.</b>	<b>00.</b>	<b>65.</b>	<b>Z80.</b>	<b>A</b>
--	-----	------------	------------	------------	------------	-------------	----------



Protection class III: only suitable for very low voltage supply (<50V)



Luminaires are suitable for mounting on ordinary flammable materials, which have an inflammation point of at least 200° C. / 392° F.



Conforms to UL-STD 1598 Certified to CSA-STD C22.2 No.250.0-08

# SATTLER

410 381 1497 answers@inter-lux.com  
inter-lux reserves the right to make technical changes without notice

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2) Weight of lights without remote technical unit or canopy.