


EVOLUTION SPOT

Housing: Spotlight, solid Aluminum housing, 330° hinge, 24° and 38°
Design: Ulrich Sattler

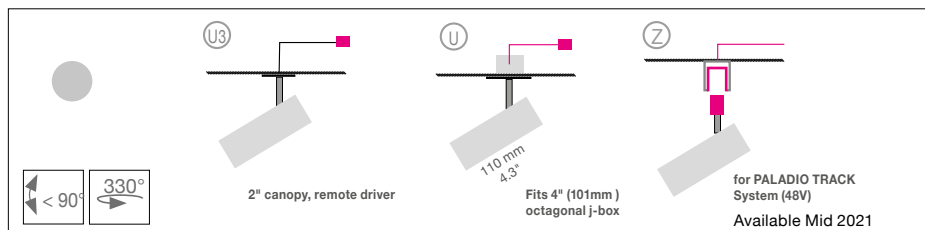


	Size: Ø / L mm	Inches	LED Watt	Lumen ¹⁾	Weight ²⁾ kg/lbs	Beam angle	Item No.	LED direct	Dimming	LED indirect	Finish	Power supply cable	Mounting version	
Size	Ø 42 / L 110 mm	Ø 1.7 / L 4.3"	6,3	858	0,4 / 0.88	24°	1778.	x x.	x x.	x x.	x x.	x x x.	x x	
	Ø 42 / L 110 mm	Ø 1.7 / L 4.3"	6,3	858	0,4 / 0.86	38°	1779.	x x.	x x.	x x.	x x.	x x x.	x x	
LED CRI > 90	<div><div>LED</div><div><div><div>24°</div></div><div><div>38°</div></div></div></div>	Warm-white		3000 K			x x x.	30.	x x.	x x.	x x.	x x x.	x x	
		Neutral-white		4000 K			x x x.	40.	x x.	x x.	x x.	x x x.	x x	
		Extra warm-white		2700 K			x x x.	27.	x x.	x x.	x x.	x x x.	x	
Dimming	<div><div></div></div>	Standard: 0-10V	<div><div>U3</div><div>U</div><div>Z</div></div>				x x x.	x x.	11.	00.	x x.	x x x.	x x	
Finish	<div><div><div></div></div><div><div></div></div><div><div></div></div><div><div></div></div></div>													
Standard:	<div><div>66</div><div>bronze anodized brushed</div></div>	<div><div>62</div><div>black anodized brushed</div></div>	<div><div>65</div><div>champ. gold anodized brushed</div></div>					x x x.	x x.	x x.	x x.	<div><div></div></div>	x x x.	x x
Mounting version	<div><div><div></div><div>U3</div></div></div>													
	<div><div>2" for remote driver</div></div>													
	<div><div><div></div><div>U</div></div></div>													
	<div><div>5" - Fits 4" octagonal j-box Remote mounted driver</div></div>													
	<div><div><div></div><div>Z</div></div></div>													
	<div><div>Mounting with adapter for 48V PALADIO TRACK System Available mid 2021</div></div>													

Canopy:			
Type	For use with Mounting version	Protective rating	
DA 50	2" for remote driver	U3	IP40
DA 125	5" - 4" octagonal j-box	U	IP40
Remote mounted ECO30W-350 LED driver (included in price)			
Input voltage for all external power supply units is 120-277 VAC 50-60 Hz.			

---	---	---	00.	---	000.	---
-----	-----	-----	------------	-----	-------------	-----

+ ECO30W-200



Remote mounted driver enclosure
13.25" (L) x 5" (W) x 2.25" (H)
surface mount in any orientation

Maximum Wiring Distance Guide*

Wire Gauge	Maximum Lead Length
18	72 ft (22 m)
16	118 ft (36 m)
14	150 ft (46 m)
12	200 ft (61 m)

*Actual distance must be calculated by installer.
Must comply with NEC code.

SATTLER

410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice

IP 50



Direct light distribution



Protection class II



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250.0-08

Technical data is subject to change. Errors and omissions excepted 1) Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. 2) Weight of lights without remote technical unit or canopy.