

ORMA



 **linea**
light
i-LÈD

orma

Materials

Aluminium body


Extra-clear tempered glass diffuser



orma range



							
	Orma Trimless Fixed	Orma Trimless Adjustable	Orma Trimless Frosted	Orma Trimless Concentric Rings	Orma Trim Flush Fixed	Orma Trim Flush Adjustable	Orma Trim Flush Wall Washer
Ø0.9"	1W CC 1.5W CV	-	1W CC 1.5W CV	-	-	-	-
Ø1.7"	-	-	-	1.5W CV	-	-	-
Ø2.1" - Ø2.2"	4W CC 5W CV	4W CC 5W CV	1W CC 1.5W CV	1W CC 1.5W CV	4W CC 5W CV	4W CC 5W CV	4W CC 5W CV
Ø2.5"	-	-	-	-	-	-	-
Ø3.3" - Ø3.4"	8W CC 9W CV	8W CC 9W CV	2W CC 2.5W CV	2W CC 2.5W CV	8W CC - 9W CV 8W RGBW	8W CC 9W CV	8W CC 9W CV
Ø3.8"	-	-	-	-	-	-	-
Ø4.9" - Ø5"	12W CC	12W CC	4W CC 5W CV	4W CC 5W CV	12W CC	12W CC	12W CC
Ø5.4"	-	-	-	-	-	-	-
Accessories	HC DL	HC	-	-	HC DL	HC	-
Finish	Glass Alu	Glass Alu	Glass Alu	Black White Grey	Steel Alu	Steel Alu	Steel Alu
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW	2700K 3000K 4000K	2700K 3000K 4000K
Optic	Spot Flood Wide Flood	Spot Flood Wide Flood	General	General	Spot Flood Wide Flood Elliptical	Spot Flood Wide Flood	Asymmtric

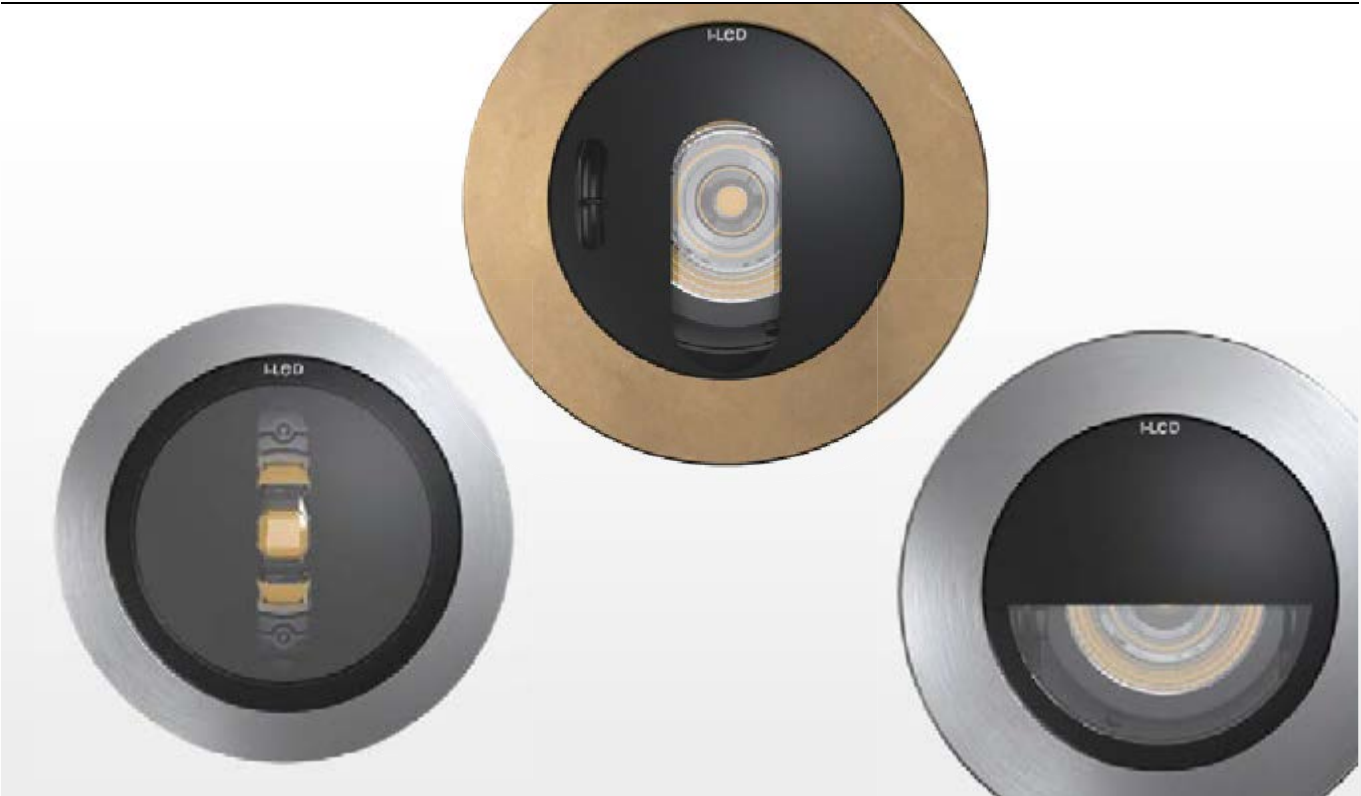

							
	Orma Trim Semi-Flush Blade	Orma Trim Flush Frosted	Orma Trim Semi-Flush Fixed	Orma Trim Semi-Flush Adjustable	Orma Trim Semi-Flush Wall Washer	Orma Trim Flush Blade	Orma Trim Semi-Flush Frosted
Ø0.9"	-	-	-	-	-	-	-
Ø1.7"	-	-	-	-	-	-	-
Ø2.1" - Ø2.2"	-	1W CC 1.5W CV	-	-	-	-	-
Ø2.5"	-	-	4W CC 5W CV	4W CC 5W CV	4W CC 5W CV	-	1W CC 1.5W CV
Ø3.3" - Ø3.4"	-	2W CC 2.5W CV	-	-	-	8W CC 9W CV	-
Ø3.8"	8W CC 9W CV	-	8W CC - 9W CV 8W RGBW	8W CC 9W CV	8W CC 9W CV	-	2W CC 2.5W CV
Ø4.9" - Ø5"	-	4W CC 4.5W CV	-	-	-	-	-
Ø5.4"	-	-	12W CC	12W CC	12W CC	-	4W CC 5W CV
Accessories	-	-	HC DL	HC	-	-	-
Finish	Steel Alu Brass Alu	Steel Alu	Steel Alu Brass Alu	Steel Alu Brass Alu	Steel Alu Brass Alu	Steel Alu	Steel Alu Brass Alu
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
Optic	Extra Wide Flood	General	Spot Flood Wide Flood Elliptical	Spot Flood Wide Flood	Asymmtric	Extra Wide Flood	General

Broad Range

Orma is a complete recess-mounted family with compact sizes, and sturdy, reliable materials with high grades of protection: temporary IK10 and IP68¹, ideal for tight installation spaces.

In addition to the embossed steel flange, the range is enriched by the new Brass finish. The recess-mounted steel flange is completed by the brand new version with an all-glass front flush with the floor and a path-marker with concentric optics.

The adjustable version can be easily and quickly aimed through the screw system on the side of the fixture body, without have to open and remove the top trim/glass.

This breakthrough concept entirely remove the risk of water infiltration during the on site aiming process.

Orma was conceived with a unique application versatility which provides the designer with a vast range of possible beams, finish and optics combinations. Flush, all-glass or in metal, Orma can adapt to any setting, even the most unusual one, thanks to the possibility of choosing from no less than eight diameters and square-shaped flange. On a technical lighting level, new optics packages are introduced: Spot, Flood, Wide Flood, Extra Wide Flood, General, Elliptical, asymmetrical swing with Wall Washer optics.

1 Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min. NOT suitable for submersible installations.


2 Fixtures have an overall depth of 3" including casing. 1" variants are deeper than 3".



Blade Optics

The Blade optics let you light windows, arches and architraves, emphasising the architecture and its details. The entirely recess-mounted structure lets the window or door open and close without interference.

The light beam is very narrow laterally and then opens up to almost 180° at the front, enhancing the inner face of the openings without glare or light pollution.

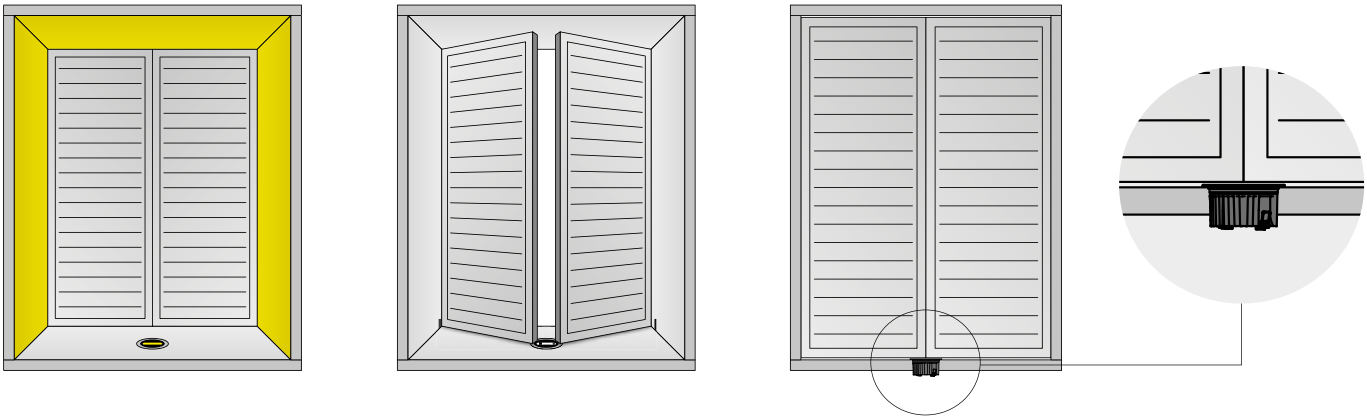


Concentric Optics

An exclusive design, recess-mounted path marker, flush with the pavement, it is capable of creating beautiful effects and giving the paths correct directionality with a sturdy structure capable of withstanding traffic weighing up to 4400 lb. The family includes four diameters: 1.7 in, 2.2 in, 3.4 in, 5 in and 5 power versions: 1 W, 1.5 W, 2 W, 2.5 W, 4 W, 5 W. A diverse and vast range available to professionals and their creativity.




Wall Washer Optics


Optics conceived for wall and floor recessed installation, they allow the creation of perfectly marked and visible luminous paths. The particular Washer optics allow the luminous cone to be sectioned in favour of high visual comfort and to be easily directed so that the positioning is not restricted in the installation phase.

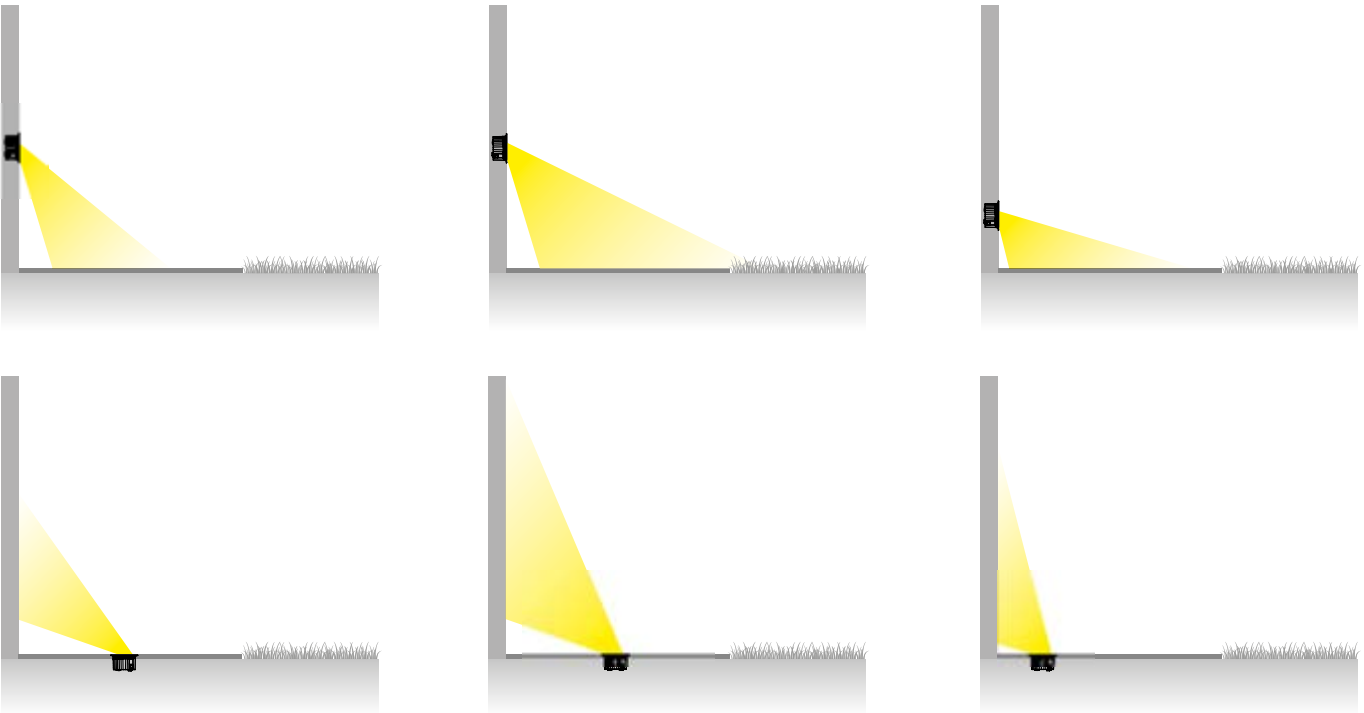

Thanks to the tilting system built into the optics compartment, Orma Wall Washer is able to adapt to different installation heights, defining the diffusion of the light up the 9.8 feet away from the source.

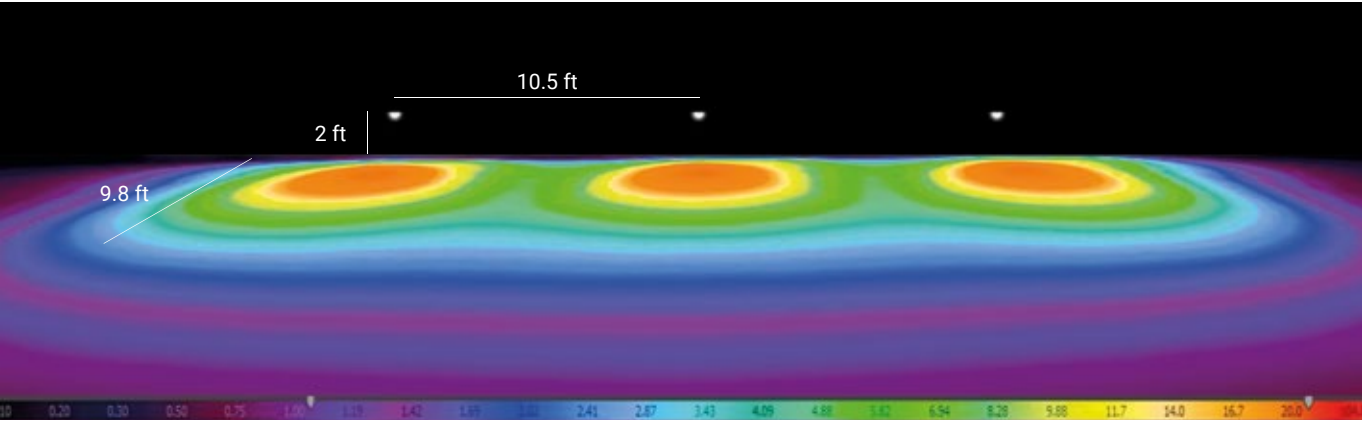



Orma Trimless Fixed | Up-Light | powerLED





C.C. 1W DC - 350mA	Cct	Im S - D	Optic
Glass Alu E82697	M 2700	136 - 71	20 Spot -
W 3000		145 - 76	35 Flood -
N 4000		155 - 81	

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures



Orma Trimless Fixed | Up-Light | powerLED





C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Glass Alu E82657	M 2700	490 - 288	15 Spot -
Glass Alu E82658 HC	W 3000	490 - 288	25 Elliptical* -
Glass Alu E82659 DL	N 4000	529 - 311	30 Flood -
			60 W.Flood -

*Elliptical available with E82657 only.

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures



Orma Trimless Fixed | Up-Light | powerLED



C.V. 1.5W DC - 24 VDC	Cct	Im S - D	Optic
Glass Alu E82698	M 2700	136 - 71	20 Spot -
W 3000		145 - 76	35 Flood -
N 4000		155 - 81	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location





C.V. 5W DC - 24 VDC	Cct	Im S - D	Optic
Glass Alu E82660	M 2700	490 - 288	15 Spot -
Glass Alu E82661 HC	W 3000	490 - 288	25 Elliptical* -
Glass Alu E82662 DL	N 4000	529 - 311	30 Flood -
			60 W.Flood -

*Elliptical available with E82660 only.



Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trimless Fixed | Up-Light | ArrayLED



C.C. 8W DC - 220mA	Cct	Im S - D	Optic
Glass Alu E82669	M 2700	1080 - 689	15 Spot -
Glass Alu E82670 HC	W 3000	1126 - 718	30 Flood -
Glass Alu E82671 DL	N 4000	1188 - 758	60 W.Flood -



Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

C.V. 9W DC - 24 VDC	Cct	Im S - D	Optic
Glass Alu E82672	M 2700	1193 - 689	15 Spot -
Glass Alu E82673 HC	W 3000	1244 - 718	30 Flood -
Glass Alu E82674 DL	N 4000	1313 - 758	60 W.Flood -


Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.



Orma Trimless Fixed | Up-Light | ArrayLED





C.C. 12W - 350mA	Cct	Im S - D	Optic
Glass Alu E82683	M 2700	1724 - 1365	15 Spot -
Glass Alu E82684 HC	W 3000	1724 - 1365	30 Flood -
Glass Alu E82685 DL	N 4000	1854 - 1466	60 W.Flood -

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures



Orma Trimless Adjustable | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82663	M 2700	490 - 288	15 Spot -
	W 3000	490 - 288	30 Flood -
	N 4000	529 - 311	60 W.Flood -



Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---



C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82664	M 2700	490 - 288	15 Spot -
	W 3000	490 - 288	30 Flood -
	N 4000	529 - 311	60 W.Flood -

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Trimless Adjustable | Up-Light | ArrayLED



C.C. 8W DC - 220mA	Cct	lm S - D	Optic
Glass Alu E82675	M 2700	1080 - 693	15 Spot -
Glass Alu E82676 HC	W 3000	1126 - 722	30 Flood -
	N 4000	1188 - 763	60 W.Flood -



Power supply options (remote only)

ECO30W-220 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

C.V. 9W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82677	M 2700	1193 - 693	15 Spot -
Glass Alu E82678 HC	W 3000	1244 - 722	30 Flood -
	N 4000	1313 - 763	60 W.Flood -


Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.



Orma Trimless Adjustable | Up-Light | ArrayLED



C.C. 12W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82689	M 2700	1724 - 1203	15 Spot -
Glass Alu E82690 HC	W 3000	1724 - 1203	30 Flood -
	N 4000	1854 - 1292	60 W.Flood -


Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.



Orma Trimless Frosted | Up-Light | powerLED




C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82699	M 2700	136 - 12	00 General -
	W 3000	145 - 13	
	N 4000	155 - 14	

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECODrive 30W for 1-10 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-40 fixtures
---	---	---





Orma Trimless Frosted | Up-Light | powerLED




C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82700	M 2700	136 - 12	00 General -
	W 3000	145 - 13	
	N 4000	155 - 14	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Trimless Frosted | Path-Marker | powerLED



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82667	M 2700	136 - 8	00 General -
	W 3000	145 - 8	
	N 4000	155 - 9	



Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECODrive 30W for 1-10 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-40 fixtures
---	---	---



C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82668	M 2700	136 - 8	00 General -
	W 3000	145 - 8	
	N 4000	155 - 9	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Trimless Frosted | Path-Marker | powerLED



C.C. 2W DC- 630mA	Cct	lm S - D	Optic
Glass Alu E82681	M 2700	249 - 15	00 General -
	W 3000	266 - 15	
	N 4000	284 - 16	



Power supply options (remote only)

ECO30W-630 0-10V EldoLED ECODrive 30W for 1-10 fixtures	SOLO50W-630 0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	SOLO100W-630 0-10V EldoLED SOLOdrive 100W for 1-32 fixtures
---	---	---


C.V. 2.5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82682	M 2700	249 - 15	00 General -
	W 3000	266 - 15	
	N 4000	284 - 16	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Trimless Frosted | Path-Marker | powerLED



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82695	M 2700	490 - 50	00 General -
	W 3000	490 - 50	
	N 4000	529 - 54	



Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECODrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
---	---	---

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82696	M 2700	490 - 50	00 General -
	W 3000	490 - 50	
	N 4000	529 - 54	

Power supply options (remote only)



OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Semi-Flush Concentric (Rings) | Drive-over spotlights | topLED



C.V. 1.5W DC - 24VDC		Cct	lm S - D	Optic
White	E95474	M 2700	136 - 54	00 General
Black	E95475	W 3000	145 - 60	
Grey	E95476	N 4000	155 - 63	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	---



E98292
Recessed casing
PVC

3.1
Ø1.7

E98291
Recessed casing
PVC

3.9/5.4
4.1

Orma Trimless Concentric (Rings) | Up-Light | powerLED



C.C. 1W DC - 350mA		Cct	lm S - D	Optic
Black	E82665	M 2700	136 - 6	00 General -
		W 3000	145 - 6	
		N 4000	155 - 7	

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-10 fixtures	SOL050W-350 0-10V EldoLED SOLdrive 50W for 1-20 fixtures	SOLO100W-350 0-10V EldoLED SOLdrive 100W for 1-40 fixtures
---	--	--

C.V. 1.5W DC - 24VDC		Cct	lm S - D	Optic
Black	E82666	M 2700	136 - 6	00 General -
		W 3000	145 - 6	
		N 4000	155 - 7	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	---

E83038
Recessed casing
PVC

3
Ø3.8

E99922
Recessed casing
PVC


3
Ø2.2

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Private House | Castelfranco Veneto, Italy



Orma Trimless Concentric (Rings) | Up-Light | powerLED



C.C. 2W DC - 630mA	Cct	lm S - D	Optic
Black E82679	M 2700	249 - 13	00 General -
	W 3000	266 - 13	
	N 4000	284 - 14	

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECODrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

C.V. 2.5W DC - 24 VDC	Cct	lm S - D	Optic
Black E82680	M 2700	249 - 13	00 General -
	W 3000	266 - 13	
	N 4000	284 - 14	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83039

Recessed casing

PVC

Ø3.4

3

Ø4.5

E99923

Recessed casing


PVC

Ø3.4

3

Ø3.4

Orma Trimless Concentric (Rings) | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Black E82693	M 2700	490 - 34	00 General -
	W 3000	490 - 34	
	N 4000	529 - 37	

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-220
0-10V EldoLED ECODrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Black E82694	M 2700	490 - 34	00 General -
	W 3000	490 - 34	
	N 4000	529 - 37	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83040

Recessed casing

PVC

Ø5

3

Ø6.1

E99924

Recessed casing

PVC



Ø5

3

Ø5

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Flush Fixed | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
E81181	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

	Cct	Im S - D	Optic
E81182	M 2700	490 - 187	15 Spot (20°)
	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)

	Cct	Im S - D	Optic
E81183	M 2700	490 - 194	15 Spot (22°)
	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---

C.V. 5W DC - 24 VDC	Cct	Im S - D	Optic
E81184	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

	Cct	Im S - D	Optic
E81185	M 2700	490 - 187	15 Spot (20°)
	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)

	Cct	Im S - D	Optic
E81186	M 2700	490 - 194	15 Spot (22°)
	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)



Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



E81181W15 / E81181W30

Orma Trim Flush Fixed | Up-Light | arrayLED



C.C. - 8W DC - 220 mA	Cct	Im S - D	Optic
E81187	M 2700	1080 - 858	15 Spot (15°)
	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

	Cct	Im S - D	Optic
E81188	M 2700	1080 - 619	15 Spot (15°)
	W 3000	1126 - 646	30 Flood (27°)
	N 4000	1188 - 681	60 W.Flood (49°)

	Cct	Im S - D	Optic
81189	M 2700	1080 - 576	15 Spot (16°)
	W 3000	1126 - 600	30 Flood (29°)
	N 4000	1188 - 634	60 W.Flood (53°)

Power supply options (remote only)

ECO30W-220 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

C.V. 9W DC - 24 VDC	Cct	Im S - D	Optic
E81190	M 2700	1193 - 955	15 Spot (15°)
	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

	Cct	Im S - D	Optic
E81191	M 2700	1193 - 687	15 Spot (15°)
	W 3000	1244 - 716	30 Flood (27°)
	N 4000	1313 - 756	60 W.Flood (49°)

	Cct	Im S - D	Optic
E81192	M 2700	1193 - 639	15 Spot (16°)
	W 3000	1244 - 667	30 Flood (29°)
	N 4000	1313 - 704	60 W.Flood (53°)



Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

E83203
Recessed casing
PVC

NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.





Orma Trim Flush Fixed RGBW | Up-Light | arrayLED



RGBW - 8W DC - 630 mA	Cct	Optic
E81322	Q RGBW natural white	06 N.Spot -
	V RGBW warm white	15 Spot -
		45 W.Flood -
		00 General -

Power supply options (remote only)



ECO30W-630 0-10V EldoLED ECOdrive 30W for 1-10 fixtures	SOLO50W-630 0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	SOLO100W-630 0-10V EldoLED SOLOdrive 100W for 1-32 fixtures
---	---	---



E81187W30

NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Flush Fixed | Up-Light | arrayLED





C.C. 12W DC - 350mA	Cct	Im S - D	Optic
E81193	M 2700	1724 - 1379	15 Spot (14°)
	W 3000	1724 - 1379	30 Flood (31°)
	N 4000	1854 - 1485	60 W.Flood (60°)

	Cct	Im S - D	Optic
E81194	M 2700	1724 - 981	15 Spot (14°)
	W 3000	1724 - 981	30 Flood (28°)
	N 4000	1854 - 1055	60 W.Flood (49°)


	Cct	Im S - D	Optic
E81195	M 2700	1724 - 1094	15 Spot (14°)
	W 3000	1724 - 1094	30 Flood (30°)
	N 4000	1854 - 1178	60 W.Flood (52°)

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
--	---	--



Orma Trim Flush Adjustable | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
SteelAlu E81205	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)


Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures


C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
SteelAlu E81206	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

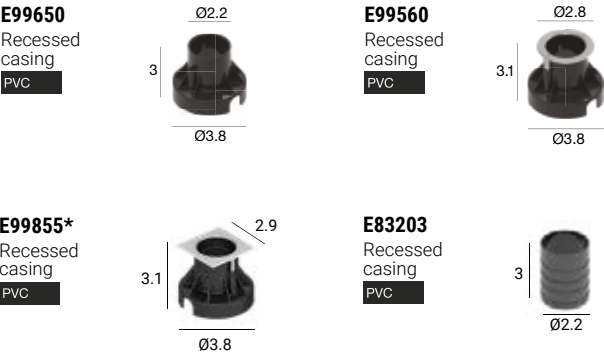

Orma Trim Flush Adjustable | Up-Light | arrayLED



C.C. - 8W DC - 220 mA	Cct	lm S - D	Optic
SteelAlu E81207	M 2700	1080 - 858	15 Spot (15°)
	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
SteelAlu E82460	M 2700	1080 - 619	15 Spot -
	W 3000	1126 - 646	30 Flood -
	N 4000	1188 - 681	60 W.Flood -

Power supply options (remote only)


ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

C.V. 9W DC - 24 VDC	Cct	lm S - D	Optic
SteelAlu E81208	M 2700	1193 - 955	15 Spot (15°)
	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
SteelAlu E82461	M 2700	1193 - 687	15 Spot -
	W 3000	1244 - 716	30 Flood -
	N 4000	1313 - 761	60 W.Flood -


Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

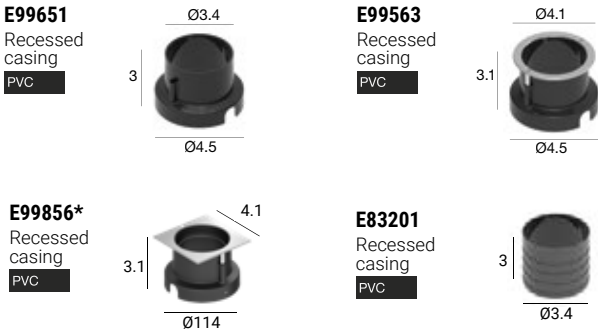

*NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush".
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Flush Adjustable | Up-Light | arrayLED



C.C. - 12W DC - 350 mA	Cct	lm S - D	Optic
SteelAlu E81209	M 2700	1724 - 1317	15 Spot (22°)
	W 3000	1724 - 1317	30 Flood (34°)
	N 4000	1854 - 1417	60 W.Floos (61°)

HC	Cct	lm S - D	Optic
SteelAlu E82462	M 2700	1724 - 935	15 Spot -
	W 3000	1724 - 935	30 Flood -
	N 4000	1854 - 1005	60 W.Flood -


Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures



*NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush".
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Flush Frosted | Path-Marker | powerLED



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
SteelAlu E81217	M 2700	136 - 17	00 General (117°)
	W 3000	145 - 18	
	N 4000	155 - 19	




Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECODrive 30W for 1-10 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-40 fixtures
---	---	---


C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
SteelAlu E81218	M 2700	136 - 17	00 General (117°)
	W 3000	145 - 18	
	N 4000	155 - 19	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Trim Flush Frosted | Path-Marker | powerLED



C.C. 2W DC - 630 mA	Cct	lm S - D	Optic
SteelAlu E81219	M 2700	249 - 25	00 General (118°)
	W 3000	266 - 26	
	N 4000	284 - 28	





Power supply options (remote only)

ECO30W-630 0-10V EldoLED ECODrive 30W for 1-10 fixtures	SOLO50W-630 0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	SOLO100W-630 0-10V EldoLED SOLOdrive 100W for 1-32 fixtures
---	---	---

C.V. 2.5W DC - 24 VDC	Cct	lm S - D	Optic
SteelAlu E81220	M 2700	249 - 25	00 General (118°)
	W 3000	266 - 26	
	N 4000	284 - 28	


Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



*NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush".
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Flush Frosted | Path-Marker | powerLED



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
SteelAlu E81221	M 2700	490 - 90	00 General (116°)
	W 3000	490 - 90	
	N 4000	529 - 97	




Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECODrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---

C.V. 4.5W DC - 24 VDC	Cct	lm S - D	Optic
SteelAlu E81222	M 2700	490 - 90	00 General (116°)
	W 3000	490 - 90	
	N 4000	529 - 97	



Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



*NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush".
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Semi-Flush Fixed | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Steel Alu E80582	M 2700	490 - 272	15 Spot (22°)
Brass Alu E84289	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

HC	Cct	Im S - D	Optic
Steel Alu E80583	M 2700	490 - 187	15 Spot (20°)
Brass Alu E84290	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)

DL	Cct	Im S - D	Optic
Steel Alu E80584	M 2700	490 - 194	15 Spot (22°)
Brass Alu E84291	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures



C.V. 5W DC - 24 VDC	Cct	Im S - D	Optic
Steel Alu E80585	M 2700	490 - 272	15 Spot (22°)
Brass Alu E84292	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

HC	Cct	Im S - D	Optic
Steel Alu E80586	M 2700	490 - 187	15 Spot (20°)
Brass Alu E84293	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)



DL	Cct	Im S - D	Optic
Steel Alu E80587	M 2700	490 - 194	15 Spot (22°)
Brass Alu E84294	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



Orma Trim Semi-Flush Fixed | Up-Light | arrayLED



C.C. - 8W DC - 220 mA	Cct	Im S - D	Optic
Steel Alu E80588	M 2700	1080 - 858	15 Spot (15°)
Brass Alu E84295	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	Im S - D	Optic
Steel Alu E80589	M 2700	1080 - 619	15 Spot (15°)
Brass Alu E84296	W 3000	1126 - 646	30 Flood (27°)
	N 4000	1188 - 681	60 W.Flood (49°)

DL	Cct	Im S - D	Optic
Steel Alu E80590	M 2700	1080 - 576	15 Spot (16°)
Brass Alu E84297	W 3000	1126 - 600	30 Flood (29°)
	N 4000	1188 - 634	60 W.Flood (53°)

Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

C.V. 9W DC - 24 VDC	Cct	Im S - D	Optic
Steel Alu E81172	M 2700	1193 - 955	15 Spot (15°)
Brass Alu E84298	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	Im S - D	Optic
Steel Alu E81173	M 2700	1193 - 687	15 Spot (15°)
Brass Alu E84299	W 3000	1244 - 716	30 Flood (27°)
	N 4000	1313 - 756	60 W.Flood (49°)




DL	Cct	Im S - D	Optic
Steel Alu E81174	M 2700	1193 - 639	15 Spot (16°)
Brass Alu E84300	W 3000	1244 - 667	30 Flood (29°)
	N 4000	1313 - 704	60 W.Flood (53°)

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.



Orma Trim Semi-Flush Fixed RGBW | Up-Light | arrayLED



RGBW - 8W DC - 630 mA	Cct	Optic
Steel Alu E81321	Q RGBW natural white	06 N.Spot -
Brass Alu E84301	V RGBW warm white	15 Spot -
		45 W.Flood -
		00 General -

Power supply options (remote only)



ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures



RTG E80588W30 / E81321V45

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Semi-Flush Fixed | Up-Light | arrayLED




C.C. 12W DC - 350mA	Cct	Im S - D	Optic
Steel Alu E81175	M 2700	1724 - 1379	15 Spot (14°)
Brass Alu E84302	W 3000	1724 - 1379	30 Flood (31°)
	N 4000	1854 - 1485	60 W.Flood (60°)

HC	Cct	Im S - D	Optic
Steel Alu E81176	M 2700	1724 - 981	15 Spot (14°)
Brass Alu E84303	W 3000	1724 - 981	30 Flood (28°)
	N 4000	1854 - 1055	60 W.Flood (49°)


DL	Cct	Im S - D	Optic
Steel Alu E81177	M 2700	1724 - 1094	15 Spot (14°)
Brass Alu E84304	W 3000	1724 - 1094	30 Flood (30°)
	N 4000	1854 - 1178	60 W.Flood (52°)

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures



Orma Trim Semi-Flush Adjustable | Up-Light | powerLED



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Steel Alu E81199	M 2700	490 - 272	15 Spot (22°)
Brass Alu E82521	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)



Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---


C.V. 5W DC - 24 VDC	Cct	Im S - D	Optic
Steel Alu E81200	M 2700	490 - 272	15 Spot (22°)
Brass Alu E82522	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Trim Semi-Flush Adjustable | Up-Light | arrayLED



C.C. - 8W DC - 220mA	Cct	Im S - D	Optic
Steel Alu E81201	M 2700	1080 - 858	15 Spot (15°)
Brass Alu E82523	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	Im S - D	Optic
Steel Alu E82456	M 2700	1080 - 619	15 Spot -
Brass Alu E82934	W 3000	1126 - 646	30 Flood -
	N 4000	1188 - 681	60 W.Flood -

Power supply options (remote only)



ECO30W-220 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

C.V. 9W DC - 24 VDC	Cct	Im S - D	Optic
Steel Alu E81202	M 2700	1193 - 955	15 Spot (15°)
Brass Alu E82524	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	Im S - D	Optic
Steel Alu E82457	M 2700	1193 - 687	15 Spot -
Brass Alu E82935	W 3000	1244 - 716	30 Flood -
	N 4000	1313 - 756	60 W.Flood -


Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Semi-Flush Adjustable | Up-Light | arrayLED



C.C. - 12W DC - 350mA	Cct	Im S - D	Optic
Steel Alu E81203	M 2700	1724 - 1317	15 Spot (22°)
Brass Alu E82525	W 3000	1724 - 1317	30 Flood (34°)
	N 4000	1854 - 1417	60 W.Flood (61°)


HC	Cct	Im S - D	Optic
Steel Alu E82458	M 2700	1724 - 935	15 Spot -
Brass Alu E84308	W 3000	1724 - 935	30 Flood -
	N 4000	1854 - 1005	60 W.Flood -

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--




Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

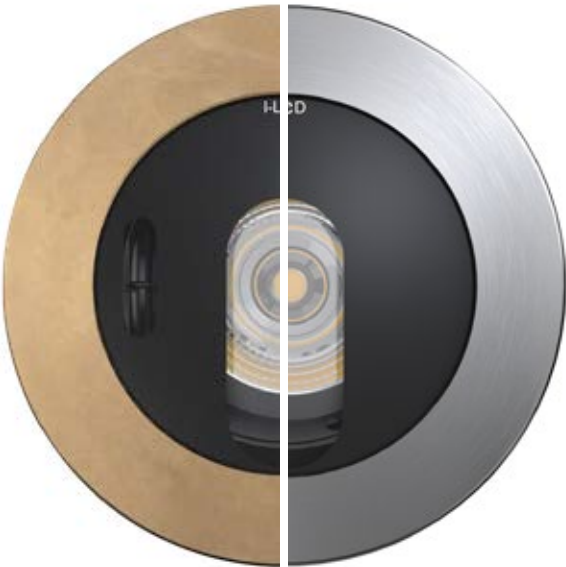

Orma Trim Semi-Flush Adjustable Brass

Orma Trim Semi-Flush Adjustable Steel

Orma Trim Semi-Flush Frosted | Path-Marker | powerLED



C.C. 1W DC - 350mA	Cct	Im S - D	Optic
Steel Alu E81211	M 2700	136 - 17	00 General (117°)
Brass Alu E84318	W 3000	145 - 18	
	N 4000	155 - 19	



Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-10 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-40 fixtures
---	---	---


C.V. 1.5W DC - 24 VDC	Cct	Im S - D	Optic
Steel Alu E81212	M 2700	136 - 17	00 General (117°)
Brass Alu E84319	W 3000	145 - 18	
	N 4000	155 - 19	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Trim Semi-Flush Frosted | Path-Marker | powerLED



C.C. 2W DC - 630mA	Cct	Im S - D	Optic
Steel Alu E81213	M 2700	249 - 25	00 General (118°)
Brass Alu E84320	W 3000	266 - 26	
	N 4000	284 - 28	


Power supply options (remote only)

ECO30W-630 0-10V EldoLED ECOdrive 30W for 1-10 fixtures	SOLO50W-630 0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	SOLO100W-630 0-10V EldoLED SOLOdrive 100W for 1-32 fixtures
---	---	---

C.V. 2.5W DC - 24 VDC	Cct	Im S - D	Optic
Steel Alu E81214	M 2700	249 - 25	00 General (118°)
Brass Alu E84321	W 3000	266 - 26	
	N 4000	284 - 28	


Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Semi-Flush Frosted | Path-Marker | powerLED



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Steel Alu E81215	M 2700	490 - 90	00 General (116°)
Brass Alu E84322	W 3000	490 - 90	
	N 4000	529 - 97	


Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---

C.V. 5W DC - 24 VDC	Cct	Im S - D	Optic
Steel Alu E81216	M 2700	490 - 90	00 General (116°)
Brass Alu E84323	W 3000	490 - 90	
	N 4000	529 - 97	

Power supply options (remote only)


OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.


INSTALLATION

Installation in a few quick steps (Recessed casing E99563 + Orma Trim Flush Adjustable E81207W15)

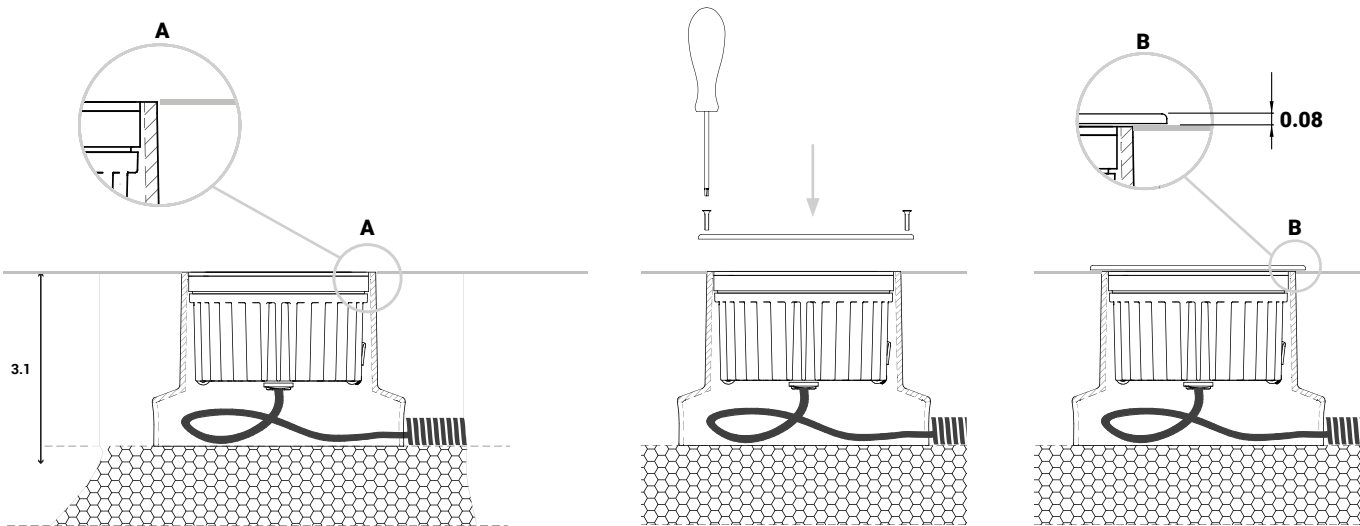

LOCKING SYSTEM

Technologically advanced outer casings that offer maximum aiming stability when using the adjustable version of the equipment thanks to the special grooves that stabilise the screw and prevent rotation thereof over time.

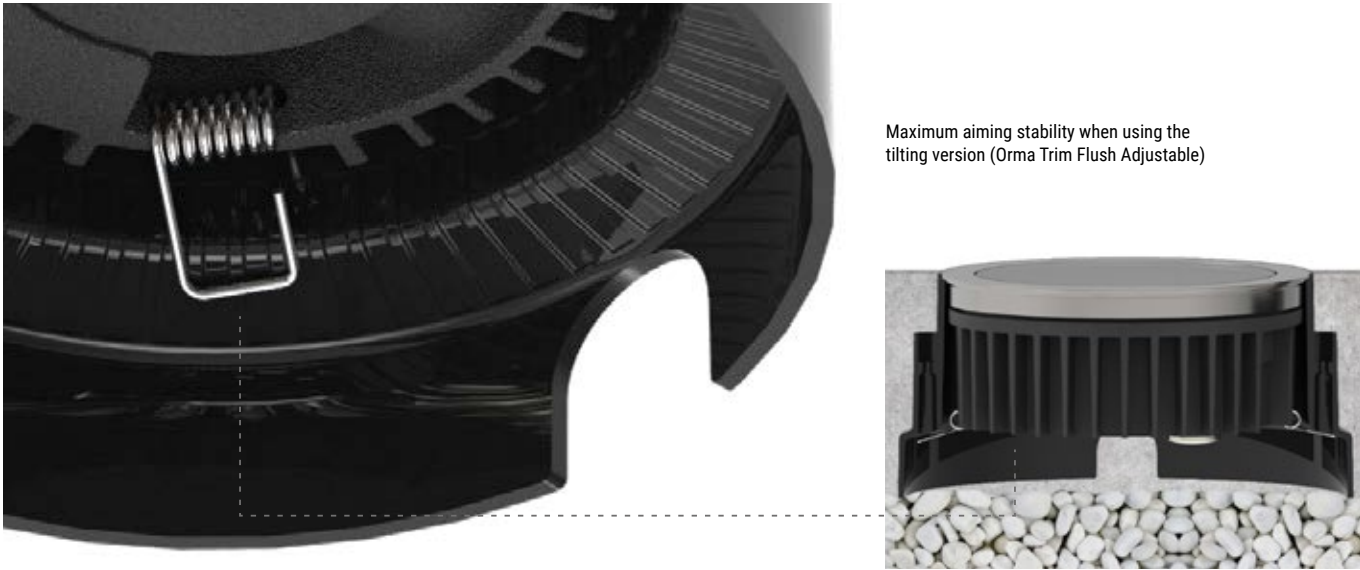

Maximum aiming stability when using the tilting version (Orma Trim Flush Adjustable)





orma

Materials
Aluminium body
AISI 316L stainless steel flange

Orma Trim Flush Wall Washer | Up-Light | powerLED



C.C. - 4W DC 350 mA	Cct	lm S - D	Optic
SteelAlu E83631	M 2700	490 - 129	07 Asymm. -
	W 3000	490 - 129	
	N 4000	529 - 140	

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

C.V. 24 V - 5W DC	Cct	lm S - D	Optic
SteelAlu E83633	M 2700	490 - 129	07 Asymm. -
	W 3000	490 - 129	
	N 4000	529 - 140	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location
E99650 Recessed casing PVC	E99560 Recessed casing PVC
E99855* Recessed casing PVC	E83203 Recessed casing PVC

Orma Trim Flush Wall Washer | Up-Light | arrayLED



C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
SteelAlu E83639	M 2700	1724 - 598	07 Asymm. -
	W 3000	1724 - 598	
	N 4000	1854 - 643	

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

Orma Trim Flush Wall Washer | Up-Light | arrayLED



C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
SteelAlu E83635	M 2700	1080 - 300	07 Asymm. -
	W 3000	1126 - 313	
	N 4000	1188 - 330	

Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

C.V. 24 V - 9W DC	Cct	lm S - D	Optic
SteelAlu E83637	M 2700	1193 - 333	07 Asymm. -
	W 3000	1244 - 347	
	N 4000	1313 - 366	



Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location
E99651 Recessed casing PVC	E99563 Recessed casing PVC
E99856* Recessed casing PVC	E83201 Recessed casing PVC

E99652 Recessed casing PVC	E99564 Recessed casing PVC
E99857* Recessed casing PVC	E83202 Recessed casing PVC

*NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush".
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Semi-Flush Wall Washer | Up-Light | powerLED



C.C. 4W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu E83630	M 2700	490 - 129	07 Asymm. -
Brass/Alu E84310	W 3000	490 - 129	
	N 4000	529 - 140	

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---


C.V. 24 V - 5W DC	Cct	lm S - D	Optic
Steel/Alu E83632	M 2700	490 - 129	07 Asymm. -
Brass/Alu E84311	W 3000	490 - 129	
	N 4000	529 - 140	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

E99650 Recessed casing PVC	Ø2.2	E83203 Recessed casing PVC	Ø2.2
--	------	--	------

Orma Trim Semi-Flush Wall Washer | Up-Light | arrayLED




C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu E83638	M 2700	1724 - 598	07 Asymm. -
Brass/Alu E84314	W 3000	1724 - 598	
	N 4000	1854 - 643	

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

Orma Trim Semi-Flush Wall Washer | Up-Light | arrayLED



C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
Steel/Alu E83634	M 2700	1080 - 300	07 Asymm. -
Brass/Alu E84312	W 3000	1126 - 313	
	N 4000	1188 - 330	

Power supply options (remote only)

ECO30W-220 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

C.V. 24 V - 9W DC	Cct	lm S - D	Optic
Steel/Alu E83636	M 2700	1193 - 333	07 Asymm. -
Brass/Alu E84313	W 3000	1244 - 347	
	N 4000	1313 - 366	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--


E99651 Recessed casing PVC	Ø3.4	E83201 Recessed casing PVC	Ø3.4
--	------	--	------

E99652 Recessed casing PVC	Ø5	E83202 Recessed casing PVC	Ø5
--	----	--	----


Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Wall Washer Optics

Optics conceived for wall and floor recessed installation, they allow the creation of perfectly marked and visible luminous paths. The particular Washer optics allow the luminous cone to be sectioned in favour of high visual comfort and to be easily directed so that the positioning is not restricted in the installation phase.

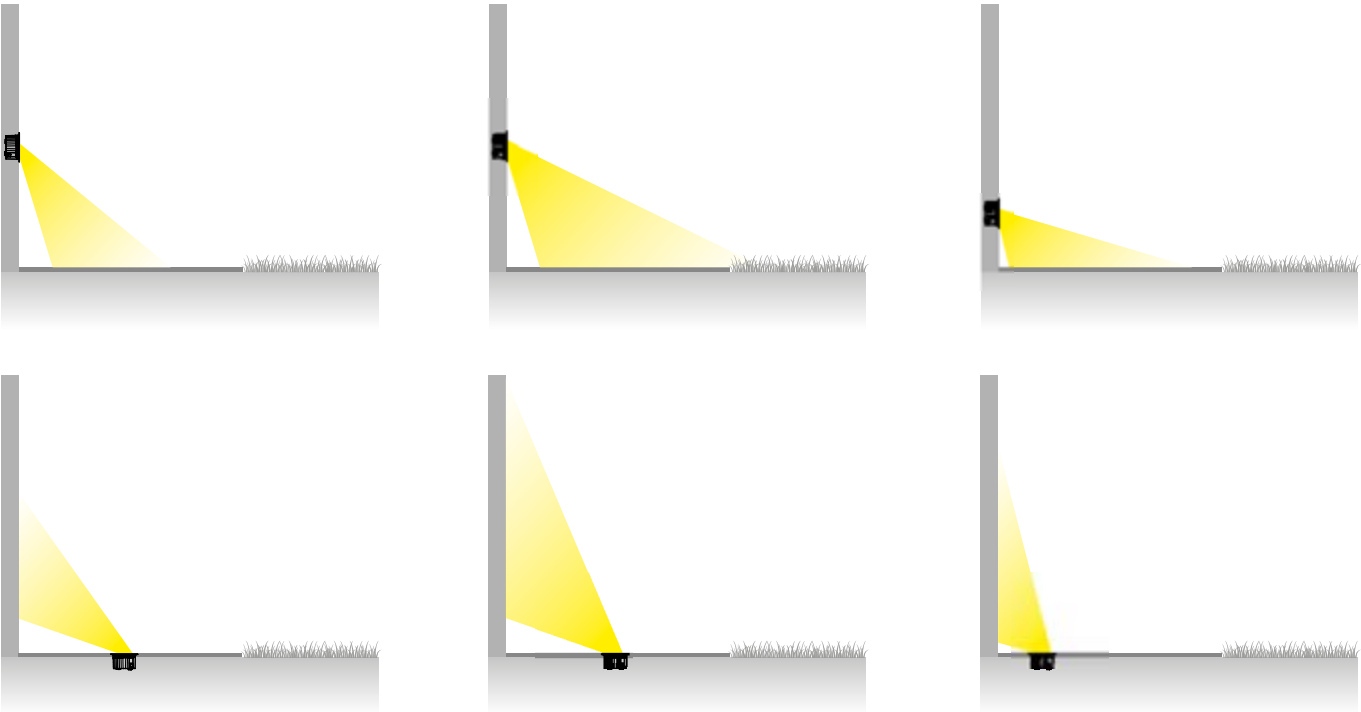

Thanks to the tilting system built into the optics compartment, Orma Wall Washer is able to adapt to different installation heights, defining the diffusion of the light up the 9.8 feet away from the source.

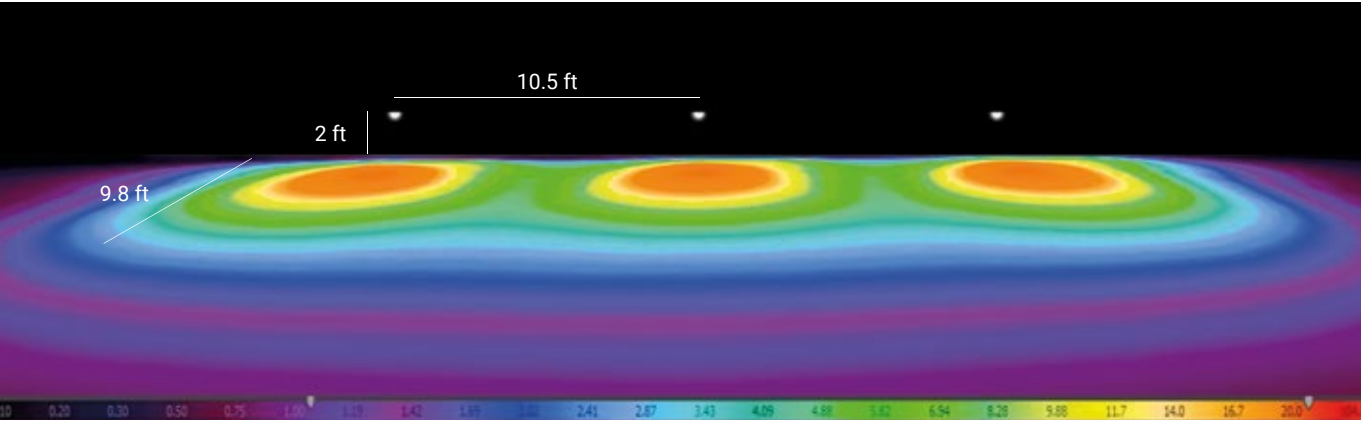


orma

Materials
Aluminum body
AISI 316L stainless steel flange



Orma Trim Flush Blade | Up-Light | powerLED



C.C. - 8W DC 630 mA	Cct	lm S - D	Optic
Steel Alu E83642	M 2700	1080 - 219	18 E.W.Flood -
	W 3000	1126 - 219	
	N 4000	1188 - 236	



Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures

C.V. 9W DC 24VDC	Cct	lm S - D	Optic
Steel Alu E83643	M 2700	1193 - 219	18 E.W.Flood -
	W 3000	1244 - 219	
	N 4000	1313 - 236	



Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

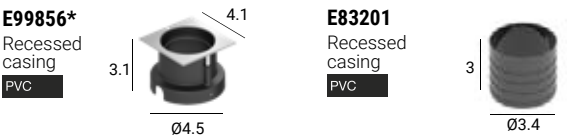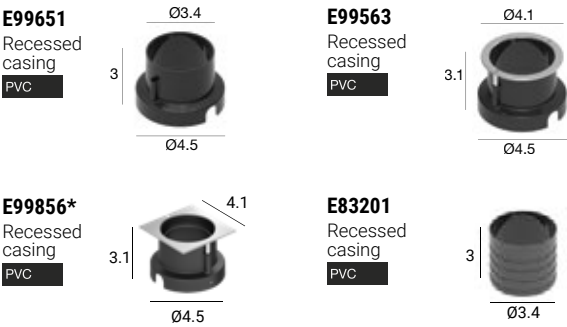

*NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush".
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Semi-Flush Blade | Up-Light | powerLED



C.C. - 8W DC 630 mA	Cct	lm S - D	Optic
Steel Alu E83644	M 2700	1080 - 219	18 E.W.Flood -
Brass Alu E84316	W 3000	1126 - 219	
	N 4000	1188 - 236	

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures

C.V. 9W DC 24VDC	Cct	lm S - D	Optic
Steel Alu E83645	M 2700	1193 - 219	18 E.W.Flood -
Brass Alu E84317	W 3000	1244 - 219	
	N 4000	1313 - 236	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location





Your Light | Future Proof