



# ProTools 60 Linear Wall Wash

## Recessed


inter•lux

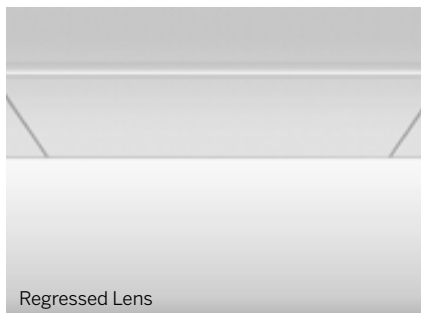

Regressed Lens

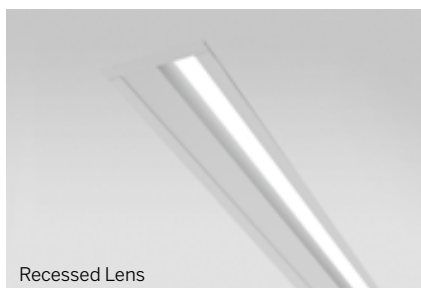

Recessed Lens



Recessed Lens  
+ Wall Wash  
(LML + WW)

### Ordering Information

Model	Fixation	Pattern	Length <sup>2</sup>	CRI/CCT	Optic	Beam	Power <sup>4</sup>	Driver <sup>5</sup>	Housing Finish <sup>6</sup>	Reflector Finish <sup>6</sup>	Options
WG-60PTLWW					LML	WW					
WG-60PTLWW	RPT RBT RG9 RG15 RGS	S P <sup>1</sup> PZ <sup>1</sup>	24 48 96 XX <sup>3</sup>	927 930 935 940 TW	LML	WW	P1 P2 P3 P4	E1 L1 A3 POE BT TQ DMX	W S F	W B S F	CP EM NYC TF

### Luminaire

- 2.4" aperture, integrated solution that is compatible with all ceiling types
- Standard and tailored run lengths, including corners
- Wash to 30' wall height
- Extreme brightness control and the elimination of disturbing glare
- Modularity of insert modules for ultimate design flexibility
- Consistent LED technology throughout the Whitegoods product range
- Evenly illuminate the wall from top to the bottom with smooth gradation
- Flexible design allows exact wall-to-wall dimensions
- Flicker-free full range dimming with standard driver (Eldoled)

### Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling
- RG9 = Recessed trim for 9/16" grid
- RG15 = Recessed trim for 15/16" grid
- RGS = Recessed trim for slot ceiling

### Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane<sup>1</sup>
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory<sup>1</sup>

### Length<sup>2</sup>

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"<sup>3</sup>

### CRI/CCT

- 90+ CRI
- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K

### Optic

- LML = Linear micro-prismatic lens

### Beam

- WW = Wall Wash

### Power<sup>4</sup>

- Static White
- P1 = 3W/ft (225 lm/ft)
- P2 = 6W/ft (420 lm/ft)
- P3 = 10W/ft (640 lm/ft)
- P4 = 15W/ft (950 lm/ft)

### Tuneable White

- P2 = 6W/ft
- P3 = 10W/ft

### Driver<sup>5</sup>

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- A3 = Advance 1% dimming, 0-10V (347V ONLY)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi
- TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)
- DMX = EldoLED 0.1% dimming DMX (120-277V)

### Housing Finish (Includes kick reflector)<sup>6</sup>

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

### Reflector Finish (Wall side only)<sup>6</sup>

- W = White, 15% gloss, Tiger Drylac 49/11350
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

### Options

- CP = Chicago Plenum Rated
- EM = Emergency (remote)
- NYC = 6' whip per run
- TF = Top feed

- 1 See pattern spec sheet.
- 2 Individual fixture lengths less than 2' may require remote driver.
- 3 Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 12" increments for continuous light. Louver supplied in 12" increments, balance of the run will have recessed blank covers on ends.
- 4 Values are approximate delivered lumens for 3000K LEDs; refer to product data sheet for additional details. For RLB/RLW, delivered lumens with 50 degree beam.
- 5 See power supply page for details.
- 6 See Tiger Drylac color chart: [inter-lux.com/tiger](http://inter-lux.com/tiger)