

## Linear - Constant Current driver information

Please refer to driver manufacturer's website for current data sheets and wiring guidelines.

### E1 = EldoLED 0.1% dimming, 0-10V (120-277V) [spec sheet](#) [30W](#) | [75W](#)


30W Wiring Diagram:




75W Wiring Diagram:



### L1 = Lutron 1% dimming, Ecosystem (120-277V) [spec sheet](#)

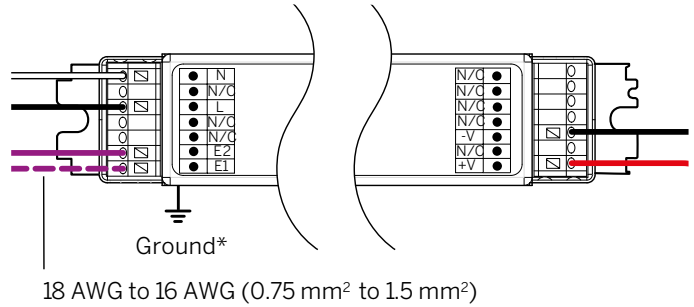


### TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable White Only) [spec sheet](#)

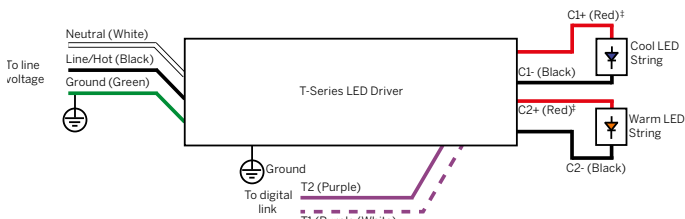


<sup>†</sup> C1+ and C2+ are electrically connected inside the driver. This supports the use of common anode loads.

### DALI = EldoLED Dali DT8 0.1% (120-277V) [spec sheet](#)

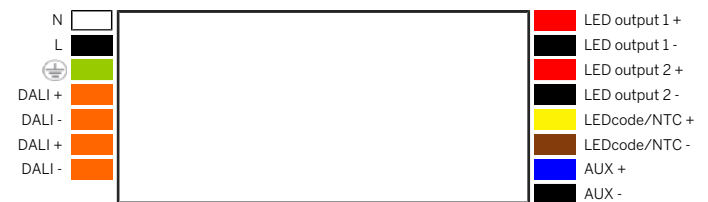

### BT = Wireless CAS – Casambi (Must be specified with E1 or DALI) [spec sheet](#)

BT + E1

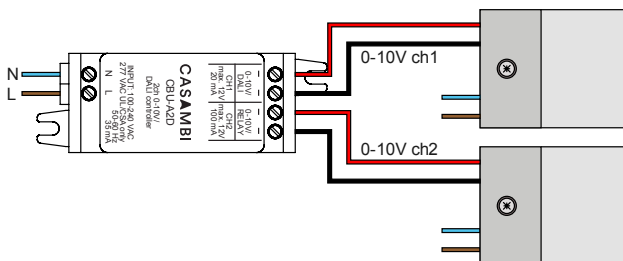

BT + DALI = TW

