

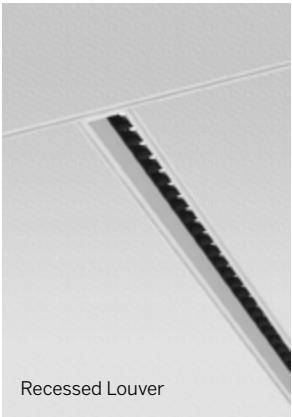



ProTools 60 Linear Downlight  
Recessed

- 2.4” aperture, integrated solution that is compatible with all ceiling types
- Standard and tailored run lengths, including corners
- Downlight inserts for spaces up to 30’ high
- Control and connectivity options
- Choice of beam spreads to accommodate all applications
- Extreme brightness control and the elimination of disturbing glare
- Modularity of insert modules for ultimate design flexibility
- Consistent LED technology throughout the Whitegoods product range
- Flexible design allows exact wall-to-wall dimensions
- Flicker-free full range dimming with standard driver (Eldoled)
- Manufactured in the USA


Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Perfect fit with inserts, louvers and lenses Standard and tailored lengths including corner configurations Recessed snap-in cover for non-illuminated section Finishes: white, black, silver and custom
Integration	Fixation into gypsum, hard ceilings and all grid ceiling types
Distribution	30, 35, 50, 80, 105 degree symmetrical downlight
LED	>90 CRI, 3-Step MacAdam, 2700-4000K static white 3W - 15W per foot, 180 nominal lumens per watt average RA 91-94 (2700-4000K) L70 (TM21 Projected 85C) Static White / Tunable White = 72,000 hours Tuneable white 2200-4000K, 80 nominal lumens per watt average
Optic	RML - recessed micro-prismatic lens   diffusion with maximum efficiency ROL - regressed opal acrylic lens   evenly illuminated line of light RLW/RLB - recessed louver white (W) or black (B)   extreme cutoff RNO - recessed narrow optic   narrow beam with maximum punch
Reflector	White: high efficiency (standard with RLW) Black: no brightness (standard with RLB) Silver: low brightness All 15% gloss Custom finish available
Driver	Compatible with quality constant current drivers
Connectivity	POE Wireless
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Chicago plenum
Voltages	120-277VAC

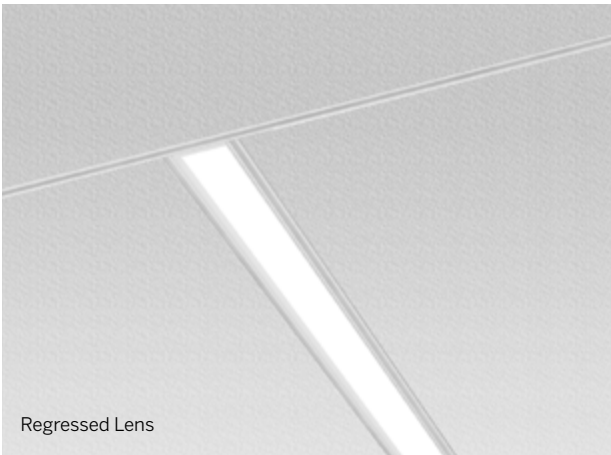


Recessed Micro-prismatic Lens (RML)



Recessed Louver (RLW, RLB)



Regressed Opal Lens (ROL)



Recessed Narrow Optic (RNO)

ProTools 60 Linear Downlight  
Recessed

Model	Fixation	Pattern	Length <sup>2</sup>	CRI/CCT	Optic <sup>3</sup>	Beam	Power <sup>5</sup>	Driver <sup>6</sup>	Housing Finish <sup>7</sup>	Reflector Finish <sup>7</sup>	Options
WG-60PTL	RPT RBT RGT9 RGT15 RGTS	S P <sup>1</sup> PZ <sup>1</sup>	24 48 96 XX <sup>3</sup>	927 930 935 940 TW <sup>4</sup>	RML ROL RLW RLB RNO	80 105 35 50 30	P1 P2 P3 P4	E1 L1 POE BT DALI TQ	W B S F	W B S F	CP EM NYC TF

- Model**
- WG-60PTL = ProTools 60 Linear Downlight

- Fixation**
- RPT = Recessed plaster trim
  - RBT = Recessed trim for hard ceiling
  - RGT9 = Recessed trim for 9/16” grid
  - RGT15 = Recessed trim for 15/16” grid
  - RGTS = Recessed trim for slot grid

- Pattern**
- S = Straight run
  - P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane<sup>1</sup>
  - PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory<sup>1</sup>

- Length<sup>2</sup>**
- 24 = 24”
  - 48 = 48”
  - 96 = 96”
  - XX = Specify inches to the nearest 0.25”<sup>3</sup>

- CRI/CCT (90+ CRI)**
- 927 = 2700K
  - 930 = 3000K
  - 935 = 3500K
  - 940 = 4000K
  - TW = Tuneable white 2200-4000K<sup>4</sup>

- Optic<sup>3</sup>**
- RML = Recessed micro-prismatic lens
  - ROL = Regressed opal lens
  - RLW = Recessed louver white (supplied with white reflectors standard)
  - RLB = Recessed louver black (supplied with black reflectors only)
  - RNO = Recessed narrow optic

- Beam**
- 80 = 80° (RML)
  - 105 = 105° (ROL)
  - 35 = 35° (RLW, RLB)
  - 50 = 50° (RLW, RLB)
  - 30 = 30° (RNO)


- Power<sup>5</sup>**
- P1 = 3W/ft
  - P2 = 6W/ft
  - P3 = 10W/ft
  - P4 = 15W/ft

- Driver<sup>6</sup>**
- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
  - L1 = Lutron 1% dimming, Ecosystem (120-277V)
  - PoE = Power over Ethernet
  - BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
  - DALI = EldoLED Dali DT8 0.1% (120-277V)
  - TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)


- Housing / Trim Finish<sup>7</sup>**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
  - B = Black, 15% gloss, Tiger Drylac 44/90053
  - S = Silver, 15% gloss, Tiger Drylac 49/90500
  - F = Custom finished trim, specify RAL

- Reflector Finish<sup>7</sup>**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard with RLW)
  - B = Black, 15% gloss, Tiger Drylac 44/90053 (standard with RLB)
  - S = Silver, 15% gloss, Tiger Drylac 49/90500
  - F = Custom finished trim, specify RAL


- Options**
- CP = Chicago Plenum Rated
  - EM = Emergency (remote)
  - NYC = 6’ whip per run
  - TF = Top feed




Plaster trim (RPT)




Recessed trim (RBT)



9/16” grid (RGT9)



15/16” grid (RGT15)



Slot (RGTS)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 See pattern spec sheet.
  - 2 Individual fixture lengths less than 2’ may require remote driver.
  - 3 Specify Lensed products to nearest 0.25”. Specify Louvered and Tuneable White products in 12” increments for continuous light. Louver supplied in 12” increments, balance of the run will have recessed blank covers on ends.
  - 4 TW only available with RML/ROL for P2 and P3.
  - 5 Refer to specsheet for delivered lumen data for all product configurations.
  - 6 See power supply page for details.
  - 7 See Tiger Drylac color chart: [inter-lux.com/tiger](http://inter-lux.com/tiger)

