



ProTools 60 Linear Downlight


Recessed

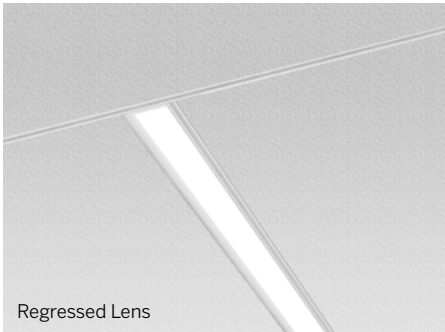


Regressed Lens




Recessed Louver




Recessed Lens




Recessed Micro-prismatic Lens (RML)



Recessed Louver (RLW, RLB)



Regressed Opal Lens (ROL)



Recessed Narrow Optic (RNO)

Plaster Trim Cutout
Width: 3" / Length: fixture length + 1/2"
Ex: 96" fixture = 96 1/2" cutout length

Bezel Trim Cutout
Width: 2 7/8" / Length: fixture length + 1/8"
Ex: 96" fixture = 96 1/8" cutout length

Ordering Information

Model	Fixation	Pattern	Length ²	CRI/CCT	Optic ³	Beam	Power ⁵	Driver ⁶	Housing Finish ⁷	Reflector Finish ⁷	Options
WG-60PTL											
WG-60PTL	RPT RBT RGT9 RGT15 RGTS	S P ¹ PPI ¹ PPO ¹ PZ ¹	24 48 96 XX ³	927 930 935 940 TW ⁴	RML ROL RLW RLB RNO	80 105 35 50 30	P1 P2 P3 P4	E1 L1 POE BT DALI TQ	W (std) B S F	W B S F	CP EM NYC TF WC

Luminaire

- 2.4" aperture, integrated solution compatible with all ceiling types.
- Standard and tailored run lengths, including corners.
- Downlight inserts for spaces up to 30' high.
- Extreme brightness control and the elimination of disturbing glare.
- Modularity of insert modules for ultimate design flexibility.
- Consistent LED technology throughout the Whitegoods product range.
- Flexible design allows exact wall-to-wall dimensions.
- Flicker-free full range dimming with standard driver (Eldoled).
- L70 (TM21 Projected 85C) 72,000 hours.
- ETL and ETL-C for dry and damp location.

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling
- RGT9 = Recessed trim for 9/16" grid
- RGT15 = Recessed trim for 15/16" grid
- RGTS = Recessed trim for slot grid

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PPI = Pattern, Plane to Plane, Inside. 2-3-4 sided pattern with inside corners¹
- PPO = Pattern, Plane to Plane, Outside. 2-3-4 sided pattern with outside corners¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length²

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"³

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K⁴

Optic³

- RML = Recessed micro-prismatic lens
- ROL = Regressed opal lens
- RLW = Recessed louver white (supplied with white reflectors standard)
- RLB = Recessed louver black (supplied with black reflectors only)
- RNO = Recessed narrow optic

Beam

- 80 = 80° (RML)
- 105 = 105° (ROL)
- 35 = 35° (RLW, RLB)
- 50 = 50° (RLW, RLB)
- 30 = 30° (RNO)

Power⁵

- P1 = 3W/ft
- P2 = 6W/ft
- P3 = 10W/ft
- P4 = 15W/ft

Driver⁶

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
- DALI = EldoLED Dali DT8 0.1% (120-277V)
- TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)

Housing / Trim Finish⁷

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 049/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Reflector Finish⁷

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard with RLW)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 44/90053 (standard with RLB, not offered with LML)
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Options

- CP = Chicago Plenum Rated
- EM = Emergency (remote)
- NYC = 6' whip per run
- TF = Top feed
- WC = Wood Ceiling (trimless - accessible ceilings only)

- See pattern spec sheet.
- Individual fixture lengths less than 2' may require remote driver.
- Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 6" increments for continuous light. Louver supplied in 6" increments, balance of the run will have recessed blank covers on ends.
- TW only available with RML/ROL for P2 and P3.
- See photometric data sheet for delivered lumens.
- See power supply page for details.
- See Tiger Drylac color chart: inter-lux.com/tiger