
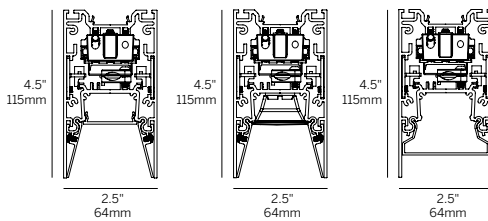
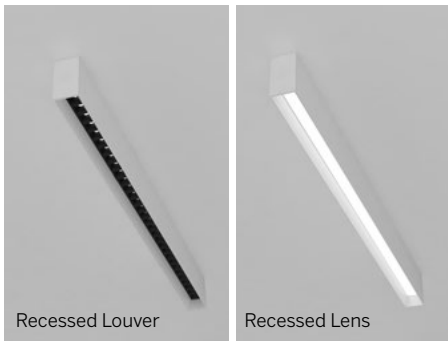


ProTools 60 Linear Downlight


Surface Mount

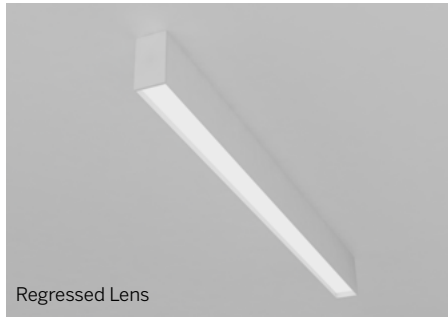

Recessed Micro-prismatic Lens (RML)

Recessed Louver (RLW, RLB)


Regressed Opal Lens (ROL)

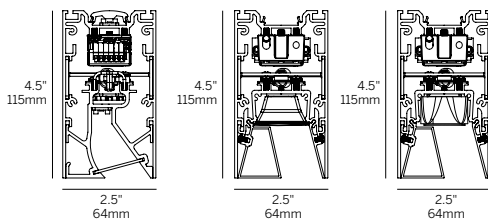

Recessed Lens + Wall Wash (LML + WW)

Recessed Louver + Wall Graze (RLW, RLB + WG)

Recessed Elliptical Optic + Wall Graze (REO + WG)



End Caps (2 included per run)

Ordering Information											
Model	Fixation	Pattern	Length ²	CRI/CCT	Optic ³	Beam	Power ⁵	Driver ⁶	Housing Finish ⁷	Reflector Finish ⁷	Options
WG-60PTL	SM	S	24	927	RML	80	P1	E1	W (std)	W	EM
		P ¹	48	930	ROL	105	P2	L1	B	B	EW
		PPI ¹	96	935	RLW	35	P3	POE	S	S	EWP
		PPO ¹	XX ³	940	RLB	50	P4	BT	F	F	
		PI ¹		TW ⁴	REO	WG		DALI			
		PO ¹			LML	WW		TQ			
		PZ ¹									

Luminaire

- 2.4" aperture, integrated solution compatible with all ceiling types.
- Standard and tailored run lengths, including corners.
- Downlight, Wall Wash and Wall Graze distribution for ceiling heights to 30'.
- Modularity of insert modules for ultimate flexibility.
- Extreme brightness control eliminates glare.
- Consistent LED technology throughout the Whitegoods product range.
- Flexible design allows exact wall-to-wall dimensions.
- Flicker-free full range dimming with standard driver (Eldoled).
- L70 (TM21 Projected 85C) 72,000 hours.
- ETL and ETL-C for dry and damp location.

Fixation

- SM = Surface Mount

Pattern

- S = Straight run
- P = Standard patterns 2, 3 or 4 sided with 90° corners on the same plane¹
- PPI = Pattern, Plane to Plane, Inside. 2-3-4 sided pattern with inside corners¹
- PPO = Pattern, Plane to Plane, Outside. 2-3-4 sided pattern with outside corners¹
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹
- PZ = Non-standard patterns and/or corners other than 90° on multiple planes, consult factory¹

Length²

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"³

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K⁴

Optic³

- RML = Recessed micro-prismatic lens
- ROL = Regressed opal lens
- RLW = Recessed louver white (supplied with white reflectors standard)
- RLB = Recessed louver black (supplied with black reflectors only)
- REO = Recessed elliptical optic
- LML = Linear micro-prismatic lens

Beam

- 80 = 80° (RML)
- 105 = 105° (ROL)
- 35 = 35° (RLW, RLB)
- 50 = 50° (RLW, RLB)
- WW = Wall Wash (LML)
- WG = Wall Graze (RLW, RLB, REO)

Power Direct⁵

- P1 = 3W/ft
- P2 = 6W/ft
- P3 = 10W/ft
- P4 = 15W/ft

Driver⁶

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
- DALI = EldoLED Dali DT8 0.1% (120-277V)
- TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)

Housing / Trim Finish⁷

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 049/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Reflector Finish⁷

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard with RLW)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 44/90053 (standard with RLB, not offered with LML)
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Options

- EM = Emergency (remote)
- EW = End wall bracket
- EWP = End wall power bracket

1 See pattern spec sheet.
 2 Individual fixture lengths less than 2' may require remote driver.
 3 Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 6" increments for continuous light. Louver supplied in 6" increments, balance of the run will have recessed blank covers on ends. REO only available with WG.
 4 TW only available with RML/ROL/LML for P2 and P3.
 5 See photometric data sheet for delivered lumens.
 6 See power supply page for details.
 7 See Tiger Drylac color chart: inter-lux.com/tiger