
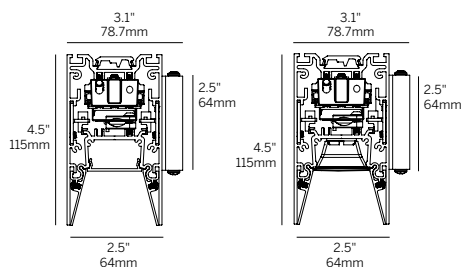



ProTools 60 Linear Downlight

Wall / Mullion Mount

inter•lux

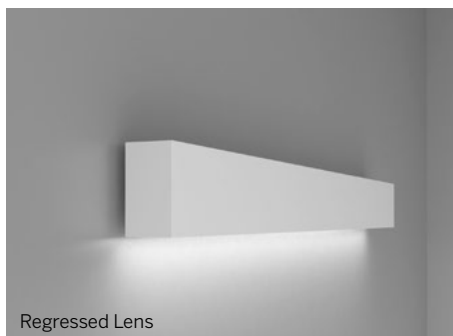


Recessed Micro-prismatic Lens (RML)

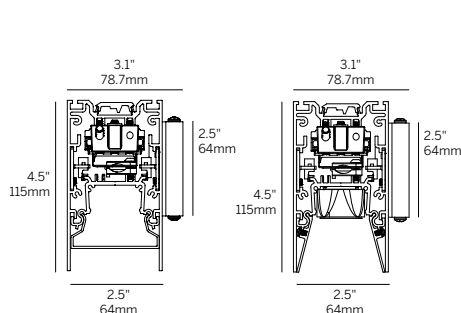

Regressed Opal Lens (ROL)

Recessed Elliptical Optic (REO)



End Caps
(2 included
per run)

Ordering Information

| WG-60PTL | | | | | | | | | | | |
|----------|-----------|---|-----------------------------------|---|---------------------------------|--------------------------------|----------------------|-------------------------------------|-----------------------------|-------------------------------|----------|
| Model | Fixation | Pattern | Length ² | CRI/CCT | Optic ³ | Beam | Power ⁵ | Driver ⁶ | Housing Finish ⁷ | Reflector Finish ⁷ | Options |
| WG-60PTL | SW SWM | S PI ¹ PO ¹ | 24 48 96 XX ³ | 927 930 935 940 TW ⁴ | RML ROL RLW RLB REO | 80 105 35 50 20x40 | P1 P2 P3 P4 | E1 L1 POE BT DALI TQ | W (std) B S F | W B S F | EM EW |

Luminaire

- 2.4" aperture, wall mount downlight with multiple distributions.
- Specialized mounting bracket to mount directly to 2.5" window mullion.
- Standard and tailored run lengths, including corners.
- Modularity of insert modules for ultimate design flexibility.
- Extreme brightness control eliminates disturbing glare.
- Consistent LED technology throughout the Whitegoods product range.
- Flexible design allows exact wall-to-wall dimensions.
- Flicker-free full range dimming with standard driver (EldoLED).
- L70 (TM21 Projected 85C) 72,000 hours.
- ETL and ETL-C for dry and damp location.

Fixation

- SW = Surface Wall Mount
- SWM = Surface Wall Mullion Mount

Pattern

- S = Straight run
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹

Length²

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"³

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K⁴

Optic³

- RML = Recessed micro-prismatic lens
- ROL = Regressed opal lens
- RLW = Recessed louver white (supplied with white reflectors standard)
- RLB = Recessed louver black (supplied with black reflectors only)
- REO = Recessed elliptical optic

Beam

- 80 = 80° (RML)
- 105 = 105° (ROL)
- 35 = 35° (RLW, RLB)
- 50 = 50° (RLW, RLB)
- 20x40 = 20x40° (REO)

Power⁵

- P1 = 3W/ft
- P2 = 6W/ft
- P3 = 10W/ft
- P4 = 15W/ft

Driver⁶

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
- DALI = EldoLED Dali DT8 0.1% (120-277V)
- TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)

Housing Finish⁷

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 049/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Reflector Finish⁷

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 049/11350 (standard with RLW)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053 (standard with RLB)
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Options

- EM = Emergency (remote)
- EW = End wall bracket

- See pattern spec sheet.
- Individual fixture lengths less than 2' may require remote driver.
- Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 6" increments for continuous light. Louver supplied in 6" increments, balance of the run will have recessed blank covers on ends.
- TW only available with RML/ROL for P2 and P3..
- See photometric data sheet for delivered lumens.
- See power supply page for details.
- See Tiger Drylac color chart: inter-lux.com/tiger