


# ProTools 60 Linear Perimeter Recessed




inter•lux

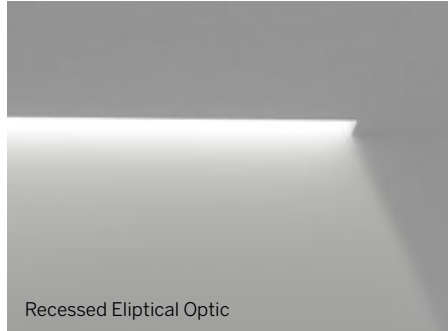

Recessed Elliptical Optic




Recessed Louver + Soft Graze

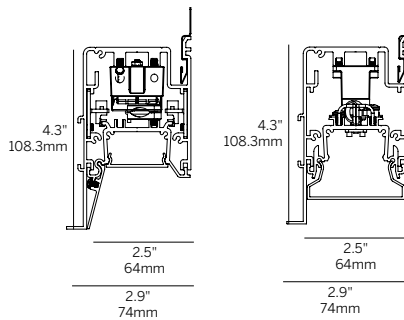


Recessed Micro-prismatic Lens (RML)

Regressed Opal Lens (ROL)

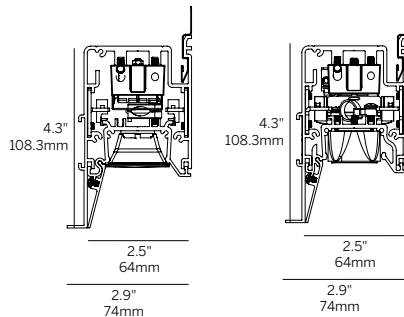

Recessed Louver (RLW, RLB)

Recessed Elliptical Optic (REO)



Soft Graze: 1" 2" 3" (SG1, SG2, SG3)

## Ordering Information

Model	Fixation	Pattern	Length <sup>2</sup>	CRI/CCT	Optic <sup>3</sup>	Beam	Power <sup>5</sup>	Driver <sup>6</sup>	Housing Finish	Reflector Finish	Options
WG-60PTLP	RPT	S	24	927	RML	80	P1	E1	W (std)	W	CP
WG-60PTLPSG1	RBT	PI <sup>1</sup>	48	930	ROL	110	P2	L1	B	B	EM
Soft Graze 1"	RGT9	PO <sup>1</sup>	96	935	RLW	35	P3	BT	S	S	NYC
WG-60PTLPSG2	RGT15		XX <sup>3</sup>	940	RLB	50	P4	DALI	F	F	TF
Soft Graze 2"				TW <sup>4</sup>	REO	20x40					
WG-60PTLPSG3											
Soft Graze 3"											

## Luminaire

- 2.4" aperture, integrated solution that is compatible with all ceiling types.
- Standard and tailored run lengths, including corners.
- Evenly illuminated perimeter lighting system.
- *Soft Graze* option to vary light center from the wall.
- Recessed optics minimizes brightness.
- Consistent LED technology throughout the Whitegoods product range.
- Easy to install housing allows the wall to continue above the finished ceiling.
- Flexible design allows exact wall-to-wall dimensions.
- Flicker-free full range dimming with standard driver (EldoLED)
- L70 (TM21 Projected 85C) 72,000 hours.
- ETL and ETL-C for dry and damp location.

## Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling
- RGT9 = Recessed trim for 9/16" grid
- RGT15 = Recessed trim for 15/16" grid

## Pattern

- S = Straight run
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane<sup>1</sup>
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane<sup>1</sup>

## Length<sup>2</sup>

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"<sup>3</sup>

## CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K<sup>4</sup>

## Optic<sup>3</sup>

- RML = Recessed micro-prismatic lens
- ROL = Regressed Opal Lens (NA with *Soft Graze*)
- RLW = Recessed louver white (supplied with white reflectors standard)
- RLB = Recessed louver black (supplied with black reflectors standard)
- REO = Recessed elliptical optic

## Beam

- 80 = 80° (RML)
- 110 = 110° (ROL)
- 35 = 35° (RLW, RLB)
- 50 = 50° (RLW, RLB)
- 20x40 = 20x40° (REO)

## Power<sup>6</sup>

- P1 = 3W/ft
- P2 = 6W/ft
- P3 = 10W/ft
- P4 = 15W/ft

## Driver<sup>6</sup>

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- DALI = EldoLED Dali DT8 0.1% (120-277V)
- BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)

## Housing / Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

## Reflector Finish

- W = White, 15% gloss, RAL 9003 (standard with RLW)
- B = Black, 15% gloss, RAL 9005 (standard with RLB)
- S = Silver, 15% gloss, RAL 9006
- F = Custom finished trim, specify RAL

## Options

- CP = Chicago Plenum Rated
- EM = Emergency (remote)
- NYC = 6' whip per run
- TF = Top feed

- 1 See pattern spec sheet.
- 2 Individual fixture lengths less than 2' may require remote driver.
- 3 Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 6" increments for continuous light. Louver supplied in 6" increments, balance of the run will have recessed blank covers on ends.
- 4 TW only available with RML for P2 and P3.
- 5 See photometric data sheet for delivered lumens.
- 6 See power supply page for details.

## Plaster Trim Cutout

Width: 3 1/8" / Length: fixture length + 1/2"  
Ex: 96" fixture = 96 1/2" cutout length

## Bezel Trim Cutout

Width: 2 11/16" / Length: fixture length + 1/8"  
Ex: 96" fixture = 96 1/8" cutout length

Add 1", 2" or 3" to cut out width if 60PTLPSG is specified.