


ProTools 60 Linear Downlight Suspended





PATTERN CORNER (P)

WG-60PTL-SXX-P-...-RML

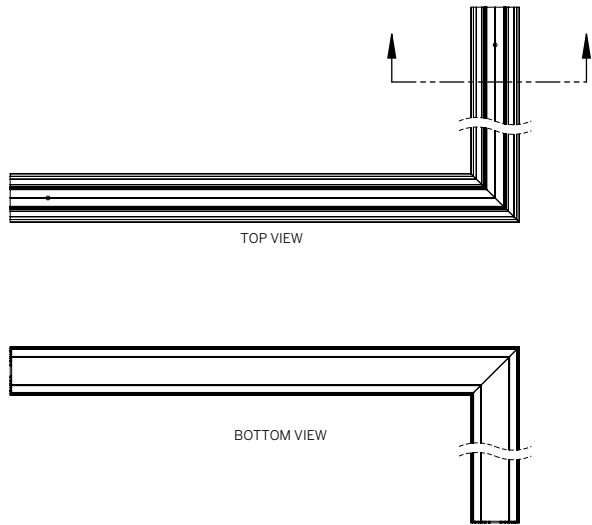


SECTION

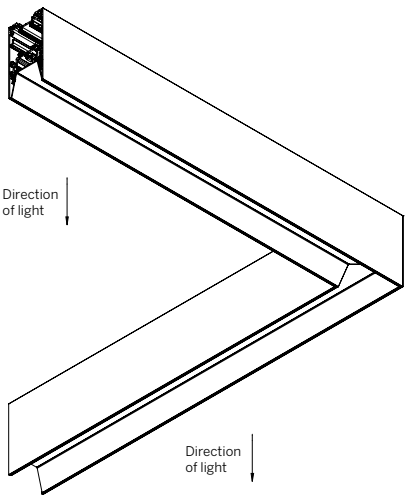



Minimum Angle 45°
Maximum Angle 180°

PATTERN CORNER (P)

WG-60PTL-SXX-P-...-ROL

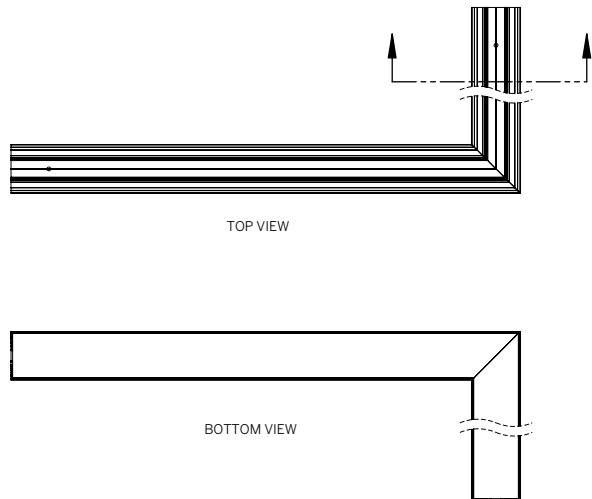

SECTION

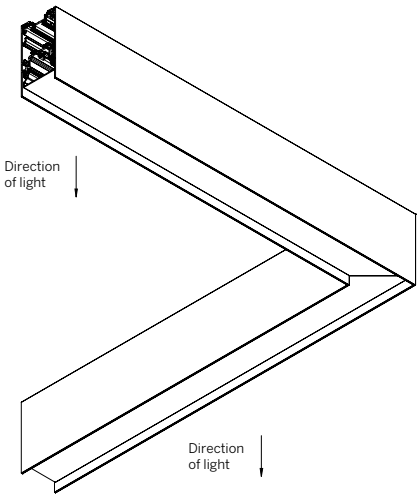


Minimum Angle 45°
Maximum Angle 180°

ProTools 60 Linear Downlight Suspended





PATTERN CORNER (P)

WG-60PTL-SXX-P-...-RLW/RLB

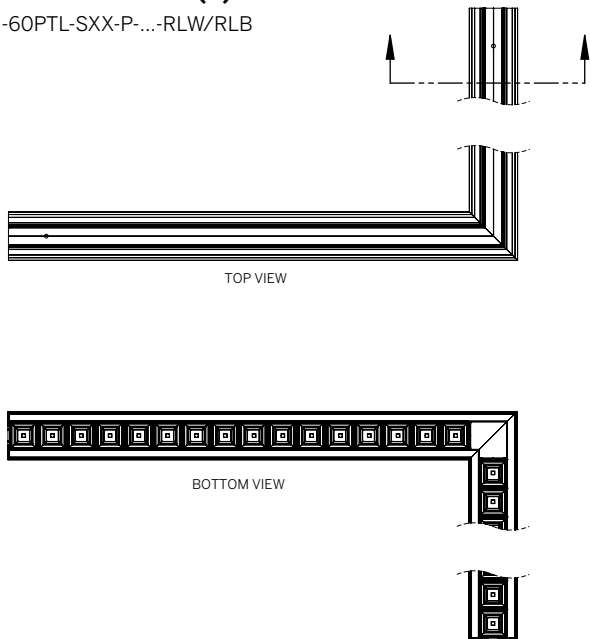


SECTION

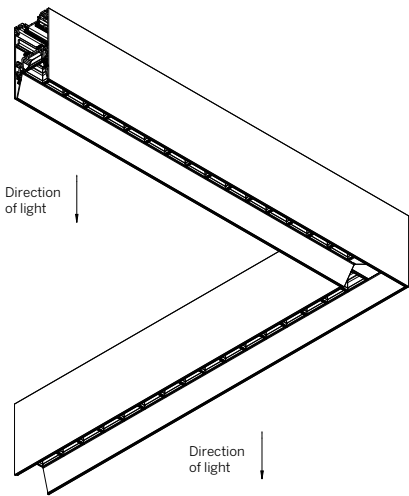



PATTERN CORNER (P)

WG-60PTL-SXX-P-...-REO



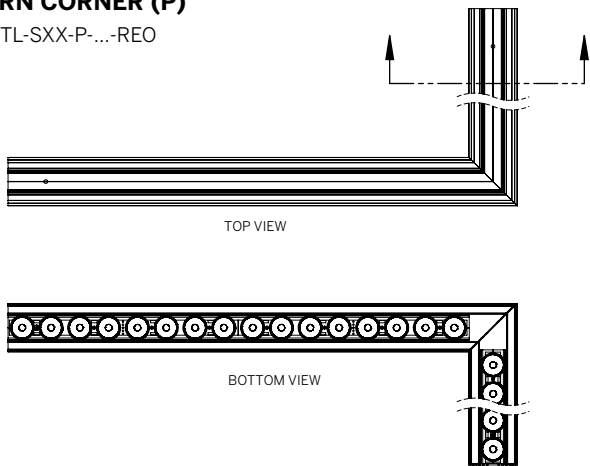


SECTION

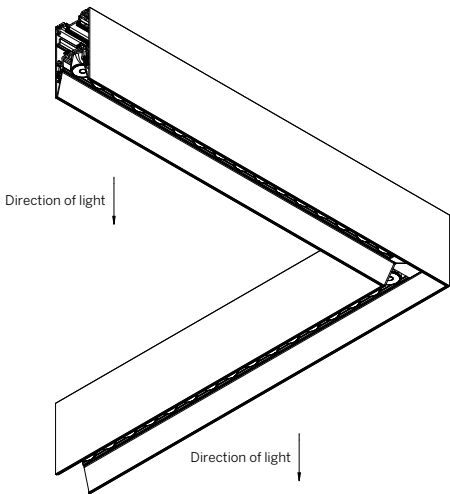




INSIDE CORNER (PI)

WG-60PTLWW-SXX-PI-...-LML-WW-

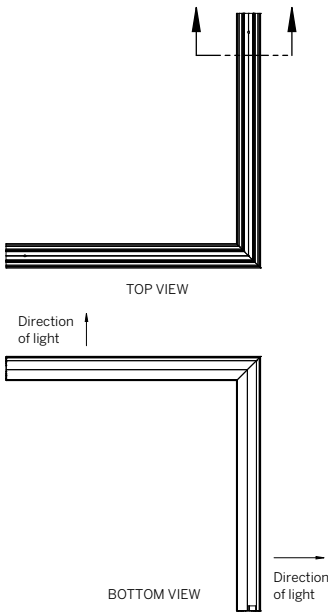


OUTSIDE CORNER (PO)

WG-60PTLWW-SXX-PO-...-LML-WW-

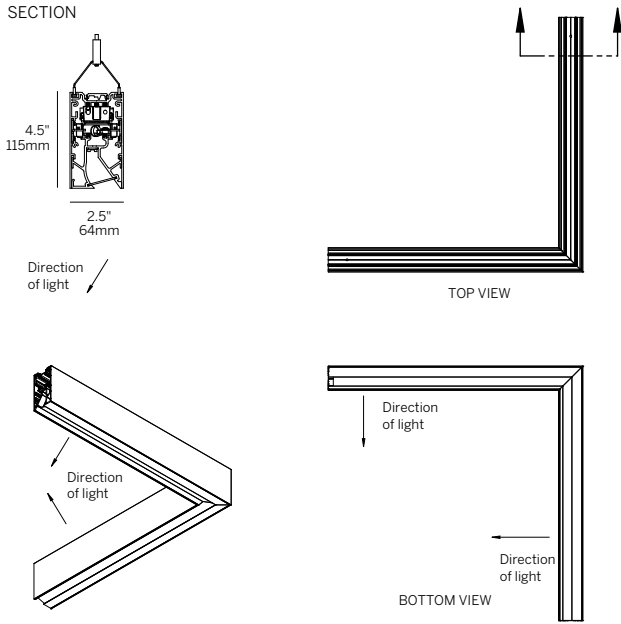


Minimum Angle 45°
Maximum Angle 180°

CORNER + STRAIGHT RUN CONNECTIONS

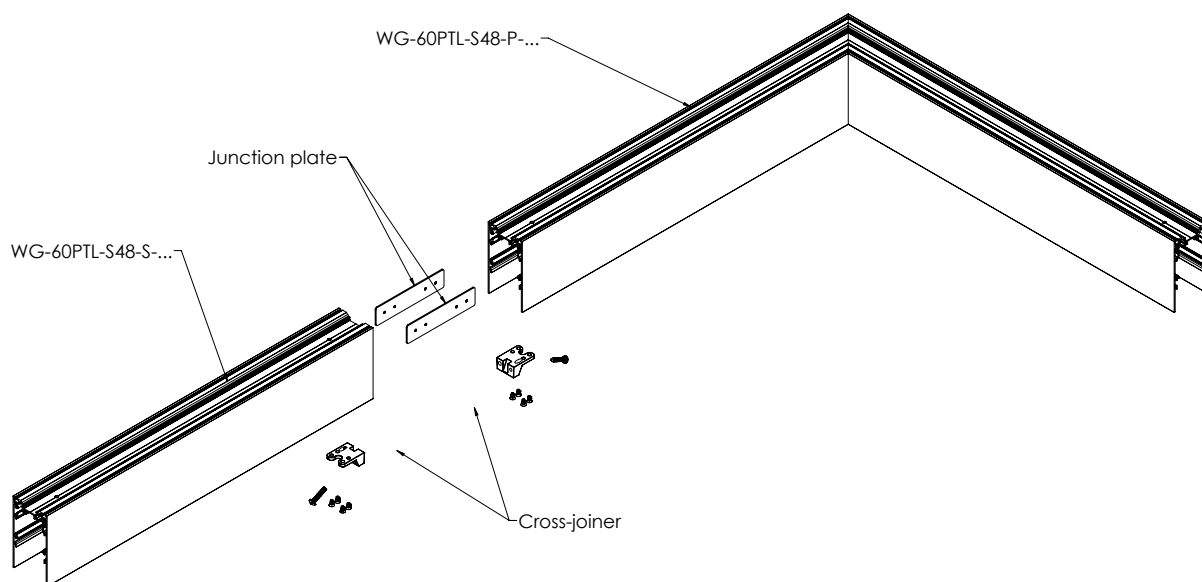


CROSS JOINER

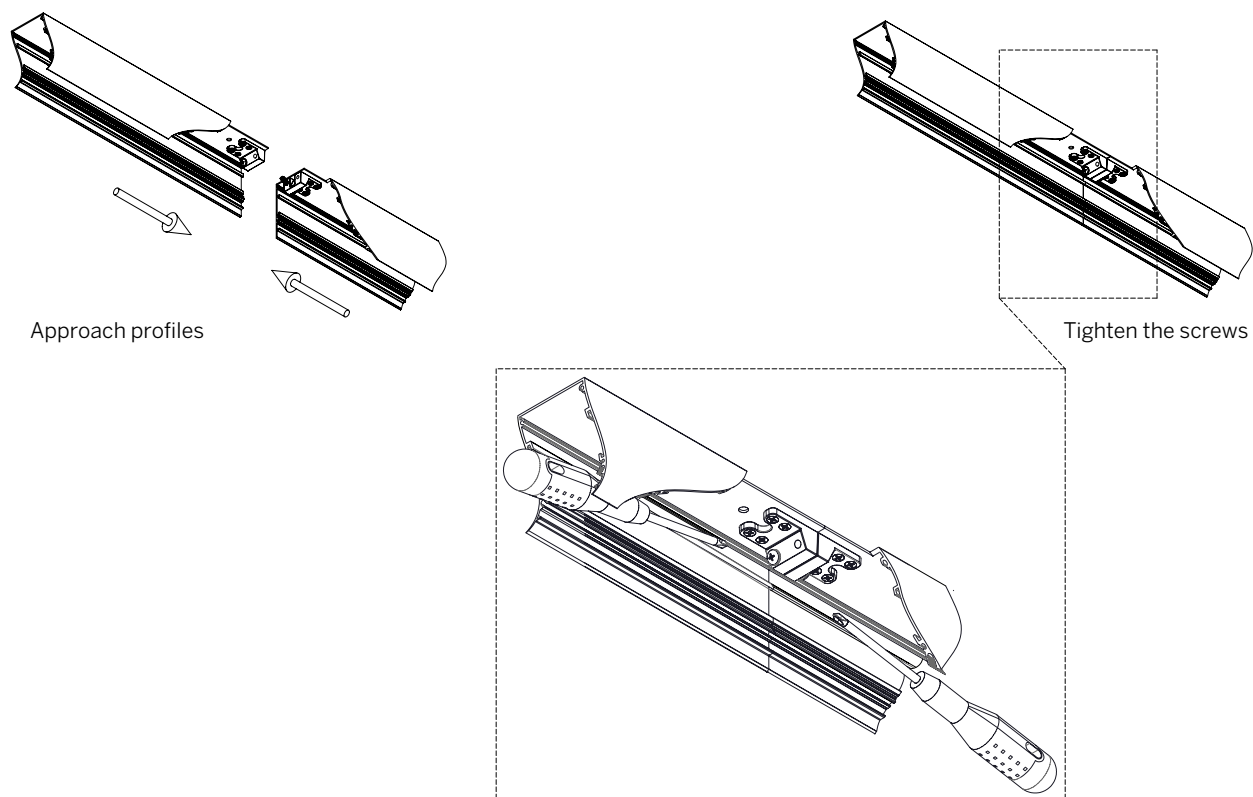


MOUNTING / CANOPIES


Power + Suspension Canopy Single Feed

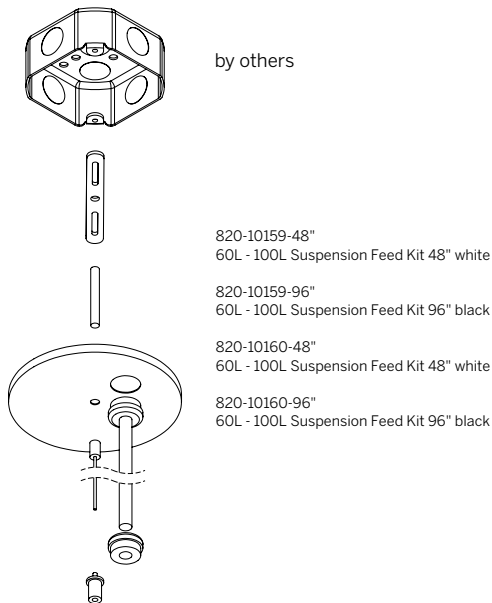



Power + Suspension Canopy Dual Feed

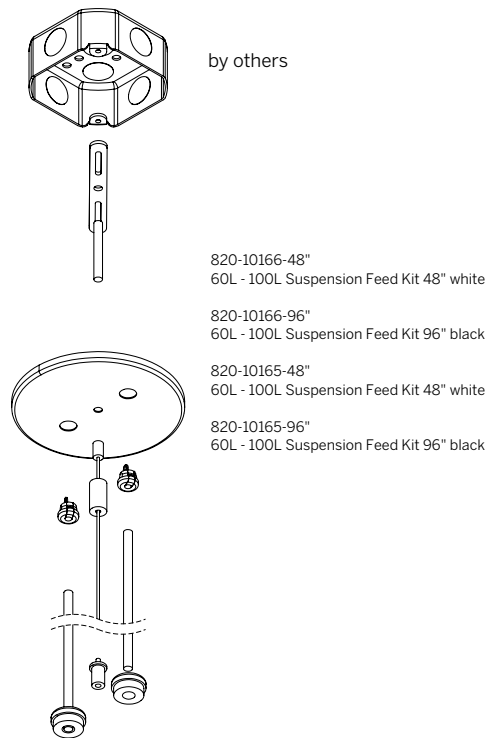


Suspension Canopy Non Feed

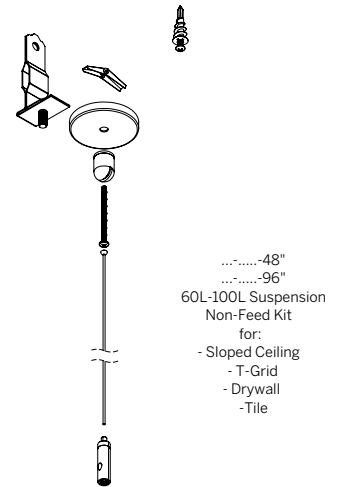


SUSPENSION / MOUNTING

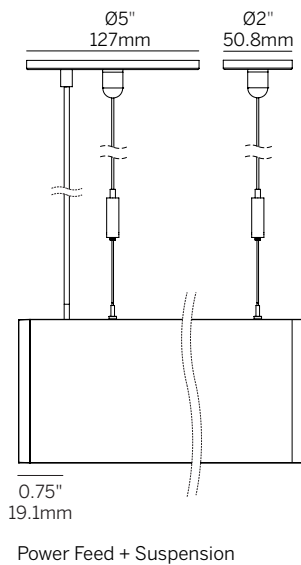


PROFILE DIMENSIONS

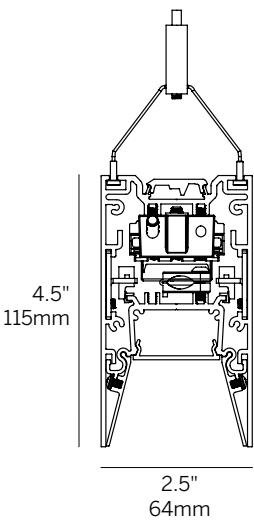


LENS / LOUVER DIMENSIONS

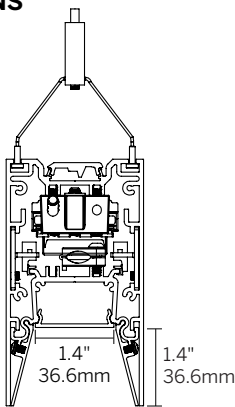


Recessed Micro-prismatic
Lens (RML)

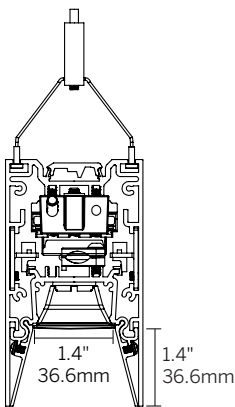


Recessed Louver
(RLW, RLB)

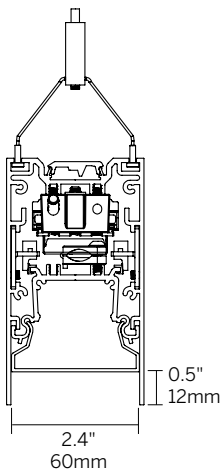

Regressed Opal Lens
(ROL)

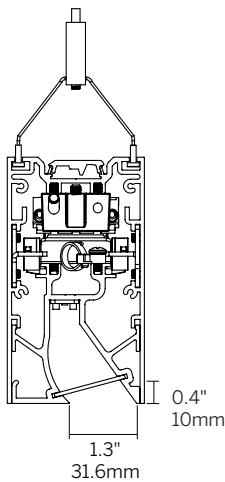


Recessed Lens + Wall Wash
(LML + WW)

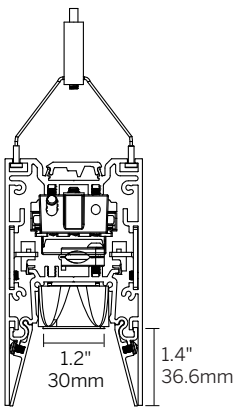

Recessed Narrow Optic
(RNO)


FILLER PLATE STRAIGHT RUN / LOUVER

- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate is recessed and finished to match the louver and minimize visual impact.

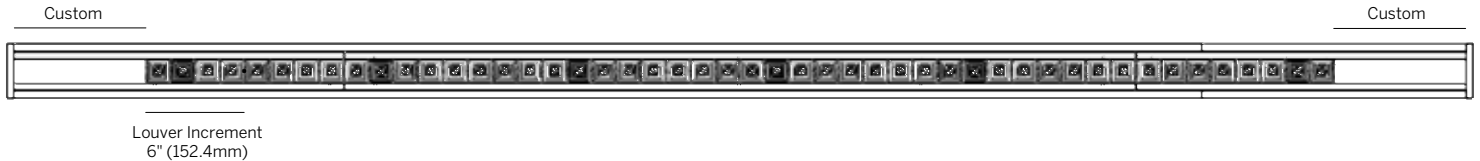


FILLER PLATE CORNER CONFIGURATION / LOUVER

- Corners will have a 2.5"x2.5" Corner Filler Plate, recessed and finished to match the louver.
- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate has a maximum length of 3" and is recessed and finished to match the louver and minimize visual impact.

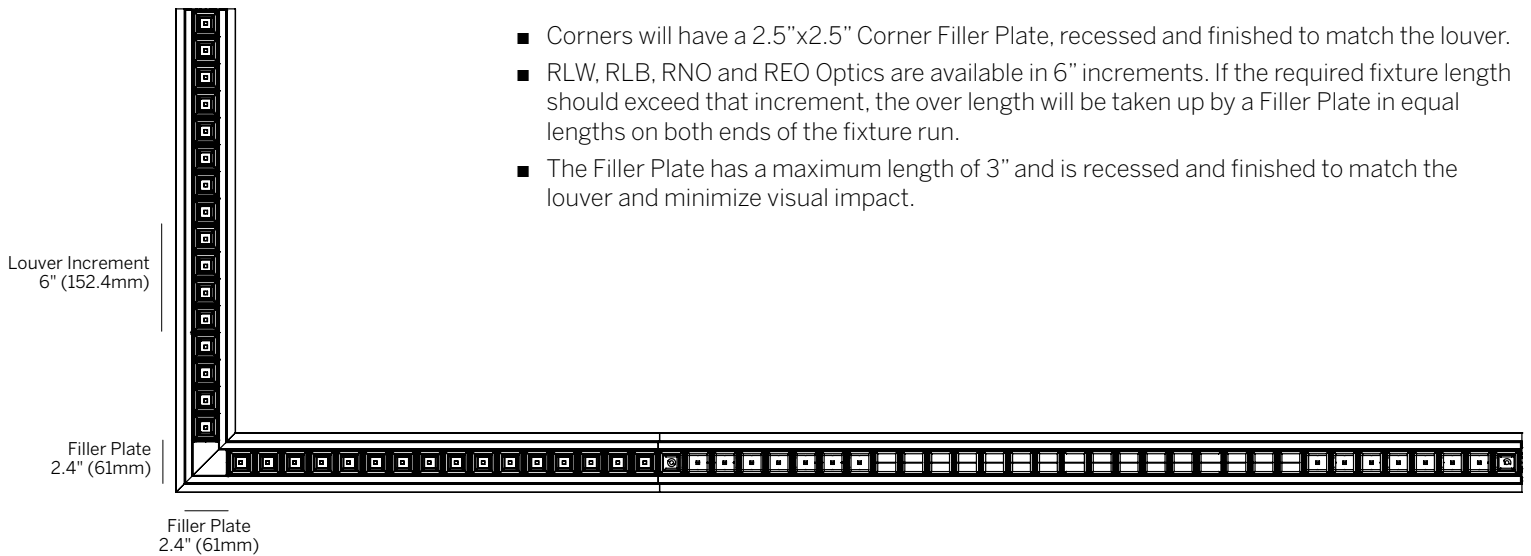

FILLER PLATE MULTI-CORNER / LOUVER

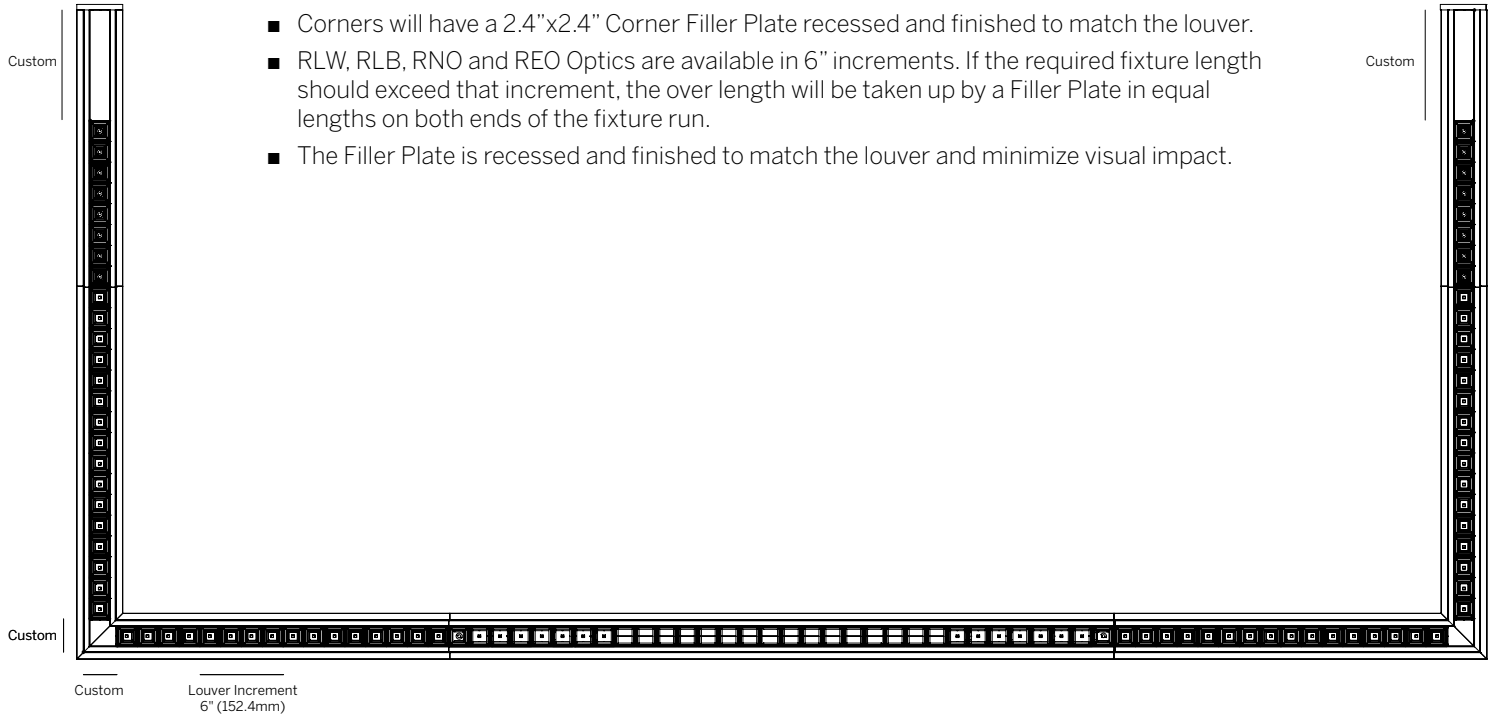

- Corners will have a 2.4"x2.4" Corner Filler Plate recessed and finished to match the louver.
- RLW, RLB, RNO and REO Optics are available in 6" increments. If the required fixture length should exceed that increment, the over length will be taken up by a Filler Plate in equal lengths on both ends of the fixture run.
- The Filler Plate is recessed and finished to match the louver and minimize visual impact.