

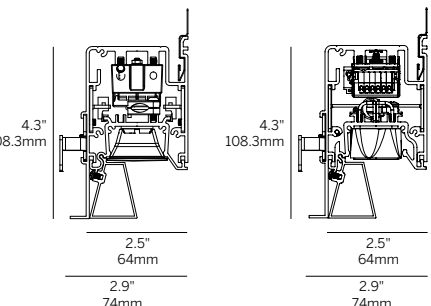



ProTools 60 Linear Wall Graze Recessed

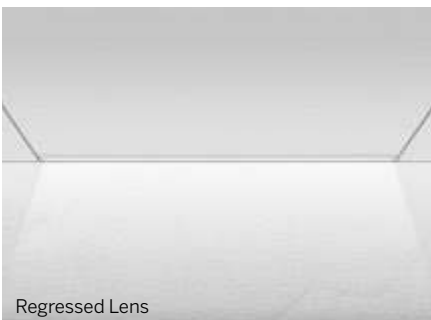

Recessed Louver
(RLW, RLB + WG)



Recessed Elliptical
Optic (REO + WG)

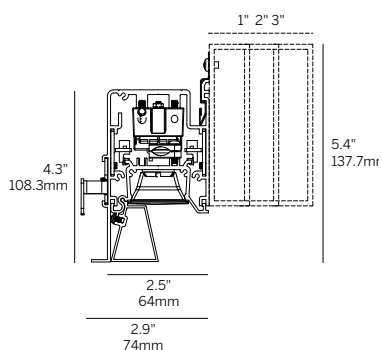

Recessed Louver
(SG1 + RLW, RLB)

Plaster Trim Cutout
Width: 3" / Length: fixture length + 1/2"
Ex: 96" fixture = 96 1/2" cutout length

Bezel Trim Cutout
Width: 3 1/8" / Length: fixture length + 1/8"
Ex: 96" fixture = 96 1/8" cutout length

Ordering Information

Model	Fixation	Pattern	Length ²	CRI/ CCT	Optic ³	Beam	Power ⁴	Driver ⁵	Housing Finish ⁶	Options
WG-60PTLWG	RPT	S	24	927	RLW	WG	P1	E1	W	CP
WG-60PTLSG1	RBT	PI ¹	48	930	RLB		P2	L1	B	EM
Soft Graze 1"	RGT9	PO ¹	96	935	REO		P3	POE	S	NYC
WG-60PTLSG2	RGT15		XX ³	940			P4	BT	F	TF
Soft Graze 2"	RGTS							DALI		
WG-60PTLSG3										
Soft Graze 3"										

Luminaire

- 2.4" aperture, integrated solution that is compatible with all ceiling types.
- Standard and tailored run lengths, including corners
- Graze to 30' wall height.
- Soft Graze versions to vary light center from the wall.
- Extreme brightness control and the elimination of disturbing glare.
- Consistent LED technology throughout the Whitegoods product range.
- Easy to install housing allows the wall to continue above the finished ceiling.
- Flexible design allows exact wall-to-wall dimensions.
- Flicker-free full range dimming with standard driver (Eldoled).
- L70 (TM21 Projected 85C) 72,000 hours.
- ETL and ETL-C for dry and damp location.

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling
- RGT9 = Recessed trim for 9/16" grid
- RGT15 = Recessed trim for 15/16" grid
- RGTS = Recessed trim for slot grid

Pattern

- S = Straight run
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane

Length²

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"³

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Optic

- RLW = Recessed louver white (supplied with white reflectors standard)³
- RLB = Recessed louver black (supplied with black reflectors only)³
- REO = Recessed elliptical optic

Beam

- WG = Wall Graze

Power⁴

- P1 = 3W/ft
- P2 = 6W/ft
- P3 = 10W/ft
- P4 = 15W/ft

Driver⁵

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
- DALI = EldoLED Dali DT8 0.1% (120-277V)

Housing / Trim Finish (Includes kick reflector)⁶

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, Tiger Drylac 44/90053
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL


Options

- CP = Chicago Plenum Rated
- EM = Emergency (remote)
- NYC = 6' whip per run
- TF = Top feed

- 1 See pattern spec sheet.
- 2 Individual fixture lengths less than 2' may require remote driver.
- 3 Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 12" increments for continuous light. Louver supplied in 12" increments, balance of the run will have recessed blank covers on ends.
- 4 See photometric data sheet for delivered lumens.
- 5 See power supply page for details.
- 6 See Tiger Drylac color chart: inter-lux.com/tiger

ProTools 60 Linear Wall Graze Recessed


WG-60PTLWG-...-RLW-WG-...-W Delivered Lumens Per Foot				
	Power			
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
CCT	927	356	659	994
	930	367	679	1025
	935	379	700	1055
	940	390	721	1086
Power Multiplier				
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
	0.25	0.46	0.70	1.00
CCT Multiplier				
	927	930	935	940
	0.97	1.00	1.03	1.06



BEAM ANGLE (0-180) = 38.5
BEAM ANGLE (90-270) = 52.5

ILLUMINANCE - 24" RLW-WG P4 3000K WG-60PTLWG-...-S-24-930-RLW-WG-P4-...-W*		
Mounting Height [ft]	Illuminance [fc at nadir]	Beam Width [ft]
3	610	2.1
6	152	4.2
9	68	6.3
12	38	8.4
15	24	10.5
18	17	12.6
21	12	14.7
24	10	16.7
27	8	18.8
30	6	20.9


WG-60PTLWG-...-RLB-WG-...-W Delivered Lumens Per Foot				
	Power			
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
CCT	927	210	388	586
	930	217	400	604
	935	223	413	622
	940	230	425	641
Power Multiplier				
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
	0.25	0.46	0.70	1.00
CCT Multiplier				
	927	930	935	940
	0.97	1.00	1.03	1.06



BEAM ANGLE (0-180) = 15
BEAM ANGLE (90-270) = 29

ILLUMINANCE - 24" RLB-WG P4 3000K WG-60PTLWG-...-S-24-930-RLB-WG-P4-...-W*		
Mounting Height [ft]	Illuminance [fc at nadir]	Beam Width [ft]
3	836	0.8
6	209	1.6
9	93	2.4
12	52	3.2
15	33	3.9
18	23	4.7
21	17	5.5
24	13	6.3
27	10	7.1
30	8	7.9

WG-60PTLWG-...-REO-WG-...-W-W Delivered Lumens Per Foot				
	Power			
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
CCT	927	282	521	786
	930	291	537	811
	935	299	554	835
	940	308	570	859
Power Multiplier				
	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	P4 [15 W/ft]
	0.25	0.46	0.70	1.00
CCT Multiplier				
	927	930	935	940
	0.97	1.00	1.03	1.06



BEAM ANGLE (0-180) = 15
BEAM ANGLE (90-270) = 26.7

ILLUMINANCE - 24" REO-WG P4 3000K WG-60PTLWG-...-S-24-930-REO-WG-P4-...-W*		
Mounting Height [ft]	Illuminance [fc at nadir]	Beam Width [ft]
3	849	0.8
6	212	1.6
9	94	2.4
12	53	3.2
15	34	3.9
18	24	4.7
21	17	5.5
24	13	6.3
27	10	7.1
30	8	7.9

PROTOOLS 60 LINEAR UGR + FIXTURE EFFICIENCY

		UGR**				FIXTURE EFFICIENCY	LUMENS PER WATT
		P1 [3W/ft]	P2 [6W/ft]	P3 [10W/ft]	P4 [15W/ft]		
OPTIC - BEAM	RLW-WG	22.1	24.3	24.4	27.1	70%	82
	RLB-WG	9.3	11.5	13.0	14.3	41%	50
	REO-WG	22.1	24.3	25.8	27.1	56%	67

*Polar Plot and Cone of Light are applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.

**UGR value noted is the maximum UGR (crosswise) with 930 LEDs at noted Power level.