



ProTools 60 Linear Wall Graze Recessed

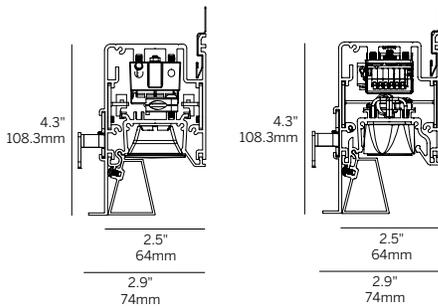

Recessed Louver (RLW, RLB + WG)

Recessed Elliptical Optic (REO + WG)

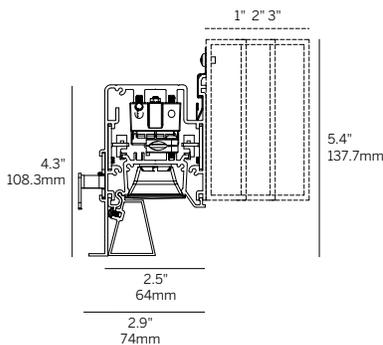

Recessed Louver (SG1 + RLW, RLB)

Plaster Trim Cutout
Width: 3 1/8" / Length: fixture length + 1/2"
Ex: 96" fixture = 96 1/2" cutout length

Bezel Trim Cutout
Width: 2 11/16" / Length: fixture length + 1/8"
Ex: 96" fixture = 96 1/8" cutout length

Add 1", 2" or 3" to cut out width if 60PTLSG is specified.

Ordering Information										
Model	Fixation	Pattern	Length ²	CRI/CCT	Optic ³	Beam	Power ⁴	Driver ⁵	Housing Finish ⁶	Options
WG-60PTLWG	RPT	S	24	927	RLW	WG	P1	E1	W	CP
WG-60PTLSG1 <i>Soft Graze 1"</i>	RBT	PI ¹	48	930	RLB		P2	L1	B	EM
WG-60PTLSG2 <i>Soft Graze 2"</i>	RGT9	PO ¹	96	935	REO		P3	POE	S	NYC
WG-60PTLSG3 <i>Soft Graze 3"</i>	RGT15		XX ³	940			P4	BT DALI	F	TF

Luminaire

- 2.4" aperture, integrated solution that is compatible with all ceiling types.
- Standard and tailored run lengths, including corners
- Graze to 30' wall height.
- *Soft Graze* versions to vary light center from the wall.
- Extreme brightness control and the elimination of disturbing glare.
- Consistent LED technology throughout the Whitegoods product range.
- Easy to install housing allows the wall to continue above the finished ceiling.
- Flexible design allows exact wall-to-wall dimensions.
- Flicker-free full range dimming with standard driver (Eldoled).
- L70 (TM21 Projected 85C) 72,000 hours.
- ETL and ETL-C for dry and damp location.

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling
- RGT9 = Recessed trim for 9/16" grid
- RGT15 = Recessed trim for 15/16" grid

Pattern

- S = Straight run
- PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
- PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane

Length²

- 24 = 24"
- 48 = 48"
- 96 = 96"
- XX = Specify inches to the nearest 0.25"³

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K

Optic

- RLW = Recessed louver white (supplied with white reflectors standard)³
- RLB = Recessed louver black (supplied with black reflectors only)³
- REO = Recessed elliptical optic

Beam

- WG = Wall Graze

Power⁴

- P1 = 3W/ft
- P2 = 6W/ft
- P3 = 10W/ft
- P4 = 15W/ft

Driver⁵

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
- DALI = EldoLED Dali DT8 0.1% (120-277V)

Housing / Trim Finish (Includes kick reflector)⁵

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 049/11350 (standard with RLW)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053 (standard with RLB)
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Options

- CP = Chicago Plenum Rated
- EM = Emergency (remote)
- NYC = 6' whip per run
- TF = Top feed

- 1 See pattern spec sheet.
- 2 Individual fixture lengths less than 2' may require remote driver.
- 3 Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 6" increments for continuous light. Louver supplied in 6" increments, balance of the run will have recessed blank covers on ends.
- 4 See photometric data sheet for delivered lumens.
- 5 See power supply page for details.
- 6 See Tiger Drylac color chart: inter-lux.com/tiger