


## 3" ProTools Accent Wall Wash Round Recessed

- Part of a complete family of 3" aperture matching downlights.
- Regressed lens gives a clean, finished appearance to this small aperture downlight.
- Wide asymmetric distribution for even wall illumination.
- High lumen output and excellent color rendition for all applications.
- Installs from below the ceiling for new and retrofit installations.
- Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
- Tunable White and Warm Dim.
- Quick-Snap feature for field-configurable multiple combinations.
- EZ-Click Cover installation makes installing or changing Covers easy in the field.
- Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.

<b>Housing</b>	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
<b>Covers</b>	Round Micro-prismatic Opal Cover
<b>LED</b>	92CRI, 98CRI, 90CRI and 95CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800 - 4000K Warm Dim from 1800 - 3000K
<b>Optics</b>	Angled, wide distribution spread lens angled to deliver maximum illumination to the wall
<b>Driver</b>	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
<b>Installation</b>	Not required when using the Driver Enclosure
<b>Housing</b>	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
<b>Warranty</b>	5-year Limited (see complete company warranty information)
<b>Certifications</b>	ETL and ETL-C for dry and damp location, CE, Wet Location rated

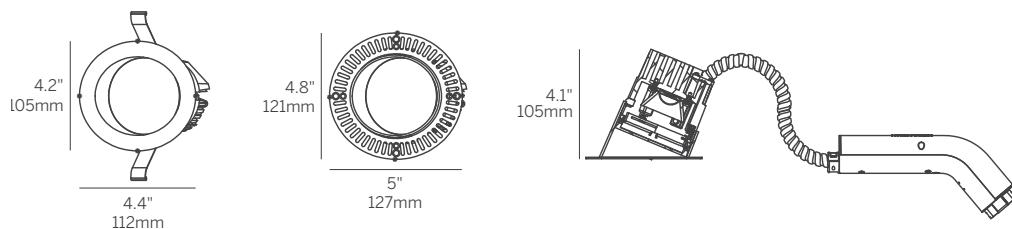

Bezel Trim (RBT)

Plaster Trim (RPT)

Minimum of 4.1" (105mm) ceiling void is required to install the integral driver from below the ceiling.



Accent Wall Wash (RAWW) / Bezel Trim (RBT)



Accent Wall Wash (RAWW) / Plaster Trim (RPT)

## 3" ProTools Accent Wall Wash Round Recessed

Model	Fixation	Power <sup>1</sup>	CRI	CCT <sup>2,3</sup>	Driver <sup>6</sup>	Cover	Beam	Trim Finish <sup>7</sup>	Cover Finish <sup>7</sup>	Options
WG-75RPTAWW	RBT RPT	L M H  TW WD	92 98  90 95	27 30 35 40  TW <sup>4</sup> WD <sup>5</sup>	S S010 SPH PEQ0 RD010 RPEQ0 DALI <sup>4</sup>	RAWW	WW	W (std) S F	W (std)	CP IC NC LP WL

### Model

- WG-75RPTAWW = 3" ProTools Accent Wall Wash Round Recessed

### Fixation

- RBT = Recessed Bezel Trim
- RPT = Recessed Plaster Trim

### Power<sup>1</sup>

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA
- TW = 9W @500mA
- WD = 11.8W @ 350mA

### CRI

- 92 = 92 CRI
- 98 = 98 CRI
- 90 = 90 CRI (TW only)
- 95 = 95 CRI (WD only)

### CCT<sup>2,3</sup>

- (Low/Mid/High Power)
- 27 = 2700K, (727/989/1306 lm)
  - 30 = 3000K, (782/1064/1405 lm)
  - 35 = 3500K, (782/1064/1405 lm)
  - 40 = 4000K, (837/1139/1505 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)<sup>4</sup>
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)<sup>5</sup>

### Integral Driver<sup>6</sup>

- S = Standard non-dim driver, 120-277V
- S010 = Standard 10% 0-10V dimming, 120-277V
- SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V

### Remote Driver<sup>6</sup>

- RD010 = EldoLED, 1% 0-10V dimming, 120-277V
- RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V
- DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V<sup>4</sup>

### Cover

- RAWW = Round Accent Wall Wash

### Beam

- WW = Wall Wash

### Trim Finish<sup>7</sup>

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

### Cover Finish<sup>7</sup>

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)

### Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- WL = Wet Location

### Emergency Remote Only

- Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.

### Notes

- Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- Other lumen packages available, consult factory.
- Source lumens shown, see IES files for delivered lumens.
- Available with NC, IC or CP Housing in accessible ceiling or remote driver only.
- WD available with PEQ0 integral driver, and RD010, RPEQ0 remote drivers.
- See power supply page for details.
- See Tiger Drylac color chart: [inter-lux.com/tiger](http://inter-lux.com/tiger)