


3" ProTools Accent Wall Wash

Round Recessed


WG-75RPTAWW-...-RAWW-WW-W						
Delivered Lumens						
CRI-CCT ¹	POWER					WD [11.8W]
	L [5.7W]	M [8.4W]	H [12.0W]	TW [9.1W]	WD [11.8W]	
	92-27	217	300	398	-	
92-30	234	323	429	-	-	
92-35	234	323	429	-	-	
92-40	250	346	459	-	-	
90-TW	-	-	-	318	-	
95-WD	-	-	-	-	-	329

UGR ²		
L [5.7W]	M [8.4W]	H [12.0W]
30.0	31.1	32.1

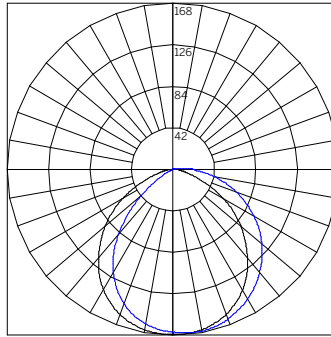

Beam Angle (0-180) = 128.9
 Beam Angle (90-270) = 103.1

ISOILLUMINANCE DIAGRAM - HIGH POWER 3500K
 RAWW WW³
 WG-75RPTAWW-...-H-92-35-...-RAWW-WW-W⁴

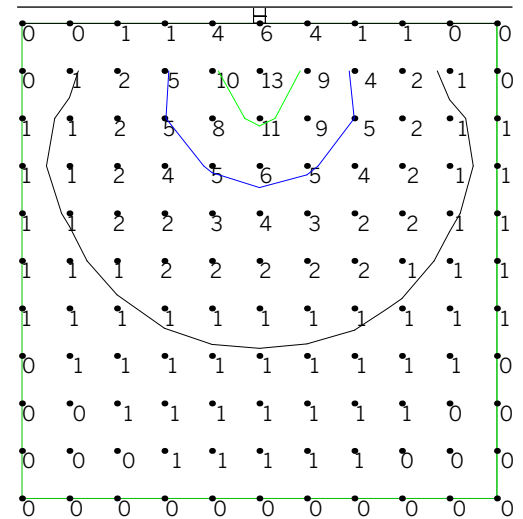

Value [Fc]	Color	Value [Fc]	Color
1	Black	20	Red
5	Blue	25	Magenta
10	Green	30	Dark Blue
15	Cyan	35	Dark Green

CRI-CCT MULTIPLIER					
92-27	92-30	92-35	92-40	90-TW	95-WD
0.93	1.00	1.00	1.07	0.74	0.77

POWER MULTIPLIER		
L [5.7W]	M [8.4W]	H [12.0W]
0.55	0.75	1.00

1 98CRI LEDs provide approximately 20% less lumens than 92CRI LED values noted in Delivered Lumens chart.
 2 UGR value noted is the maximum UGR (crosswise) with 92-35 LEDs at noted Power level.
 3 Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.
 4 Fixture is offset 2'-0" from the illuminated surface.