


3" ProTools Accent Wall Wash Square Recessed

- Part of a complete family of 3" aperture matching downlights.
- Regressed lens gives a clean, finished appearance to this small aperture downlight.
- Wide asymmetric distribution for even wall illumination.
- High lumen output and excellent color rendition for all applications.
- Installs from below the ceiling for new and retrofit installations.
- Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
- Tunable White and Warm Dim.
- Quick-Snap feature for field-configurable multiple combinations.
- EZ-Click Cover installation makes installing or changing Covers easy in the field.
- Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round Micro-prismatic Opal Cover
LED	92CRI, 98CRI, 90CRI and 95CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800 - 4000K Warm Dim from 1800 - 3000K
Optics	Angled, wide distribution spread lens angled to deliver maximum illumination to the wall
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

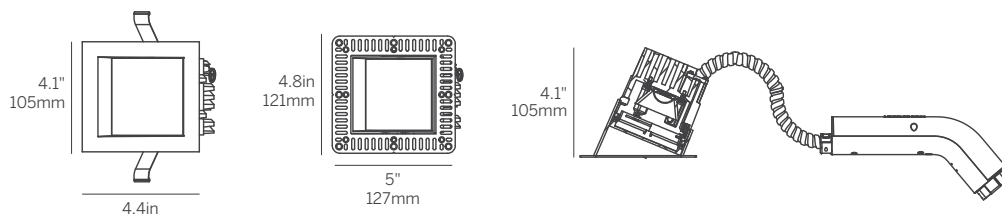


Bezel Trim (RBT)

Plaster Trim (RPT)

Minimum of 4.1" (105mm) ceiling void is required to install the integral driver from below the ceiling.

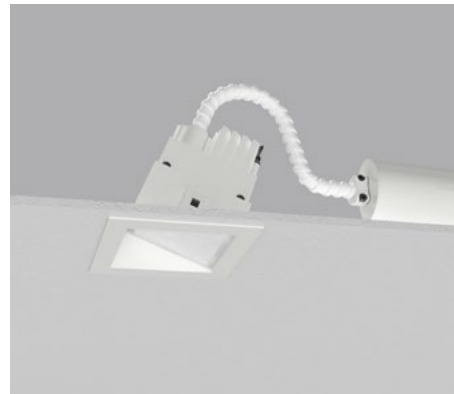

Accent Wall Wash (SAWW) / Bezel Trim (RBT)

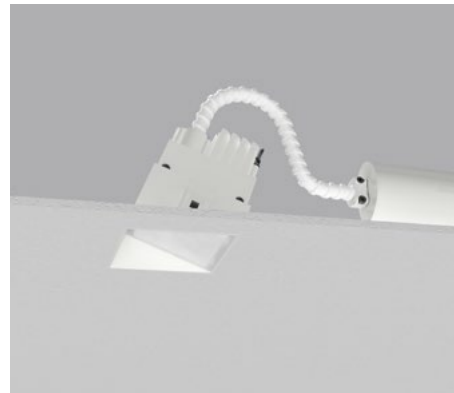

Accent Wall Wash (SAWW) / Plaster Trim (RPT)

3" ProTools Accent Wall Wash Square Recessed

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁶	Cover	Beam	Trim Finish ⁷	Cover Finish ⁷	Options
WG-75SPTAWW	RBT RPT	L M H TW WD	92 98 90 95	27 30 35 40 TW ⁴ WD ⁵	S S010 SPH PEQO RD010 RPEQO DALI ⁴	SAWW	WW	W (std) S F	W (std)	CP IC NC LP WL

Model

- WG-75SPTAWW = 3" ProTools Accent Wall Wash Square Recessed

Fixation

- RBT = Recessed Bezel Trim
- RPT = Recessed Plaster Trim

Power¹

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA
- TW = 9W @500mA
- WD = 11.8W @ 350mA

CRI

- 92 = 92 CRI
- 98 = 98 CRI
- 90 = 90 CRI (TW only)
- 95 = 95 CRI (WD only)

CCT^{2,3}

- (Low/Mid/High Power)
- 27 = 2700K, (727/989/1306 lm)
 - 30 = 3000K, (782/1064/1405 lm)
 - 35 = 3500K, (782/1064/1405 lm)
 - 40 = 4000K, (837/1139/1505 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)⁴
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)⁵

Integral Driver⁶

- S = Standard non-dim driver, 120-277V
- S010 = Standard 10% 0-10V dimming, 120-277V
- SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
- PEQO = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V

Remote Driver⁶

- RD010 = EldoLED, 1% 0-10V dimming, 120-277V
- RPEQO = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V
- DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V⁴

Cover

- SAWW = Square Accent Wall Wash

Beam

- WW = Wall Wash

Trim Finish⁷

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Cover Finish⁷

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)

Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- WL = Wet Location

Emergency Remote Only

- Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.

Notes

- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 2 Other lumen packages available, consult factory.
- 3 Source lumens shown, see IES files for delivered lumens.
- 4 Available with NC, IC or CP Housing in accessible ceiling or remote driver only.
- 5 WD available with PEQO integral driver, and RD010, RPEQO remote drivers.
- 6 See power supply page for details.
- 7 See Tiger Drylac color chart: inter-lux.com/tiger