


3" ProTools Adjustable Round Recessed

- Part of a complete family of 3" aperture matching downlights.
- Multiple beam spreads to accommodate all applications.
- High lumen output and excellent color rendition for all applications.
- Installs from below the ceiling for new and retrofit installations.
- Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
- 40 degree adjustability with 361 degree rotation.
- Quick-Snap feature for field-configurable multiple combinations.
- EZ-Click Cover installation makes installing or changing Covers easy in the field.
- Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Recessed Cone for low brightness, wide distribution Flush pinhole for maximum cut-off
LED	92CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Optics	25 and 36 degree beam spreads optional regressed diffused lens
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

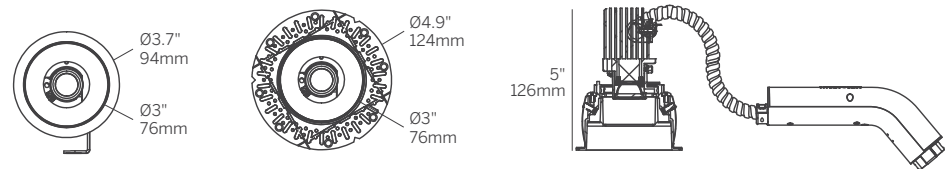

Bezel Trim (RBT)

Plaster Trim (RPT)

Minimum of 5" (126mm) ceiling void is required to install the integral driver from below the ceiling.



Recessed Cone (RRC) / Bezel Trim (RBT)



Recessed Cone (RRC) / Plaster Trim (RPT)



Flush Pinhole (RRPH) / Bezel Trim (RBT)



Flush Pinhole (RRPH) / Plaster Trim (RPT)

3" ProTools Adjustable Round Recessed

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁴	Cover	Beam	Trim Finish ⁵	Cover Finish ⁵	Options
WG-75RPTA	RBT RPT	L M H	92	27 30 35 40	S S010 SPH PEQ0 RD010 RPEQ0	RRC RRPH	25 36	W (std) S F	W (std) S F	CP IC NC LP WL RDL

Model

- WG-75RPTA = 3" ProTools Adjustable Round Recessed

Fixation

- RBT = Recessed Bezel Trim
- RPT = Recessed Plaster Trim

Power¹

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.4W @ 500mA
- H = High Power, 12W @ 700mA

CRI

- 92 = 92 CRI

CCT^{2,3}

(Low/Mid/High Power)

- 27 = 2700K, (727/989/1306 lm)
- 30 = 3000K, (782/1064/1405 lm)
- 35 = 3500K, (782/1064/1405 lm)
- 40 = 4000K, (837/1139/1505 lm)

Integral Driver¹

- S = Standard non-dim driver, 120-277V
- S010 = 0-10V >10% dimming, 120-277V
- SPH = Standard Phase Dimming, 120VAC (available in low and mid power only)
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V

Remote Driver¹

- RD010 = EldoLED, 1%, 0-10V dimming, 120-277V
- RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V

Cover

- RRC = Round Recessed Cone
- RRPH = Round Regressed Pinhole (available as 25° only)

Beam

- 25 = 25° Beam Angle
- 36 = 36° Beam Angle

Trim Finish⁵

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Cover Finish⁵

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- WL = Wet Location (only available with RRC)
- RDL = Regressed Diffused Lens

Emergency Remote Only

- Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.

Notes

- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 2 Other lumen packages available, consult factory.
- 3 Source lumens shown, see IES files for delivered lumens.
- 4 See power supply page for details.
- 5 See Tiger Drylac color chart: inter-lux.com/tiger