


3" ProTools Adjustable Round Recessed



Recessed Cone (RRC) / Plaster Trim (RPT)




Round Regressed Pinhole (RRPH) / Bezel Trim (RBT)

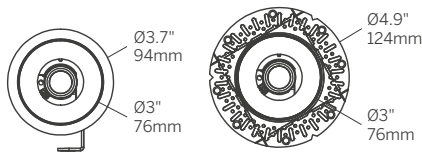


Bezel Trim (RBT)

Plaster Trim (RPT)

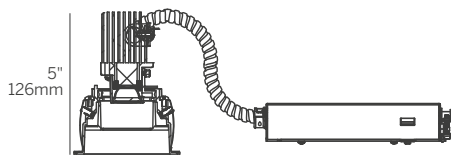

Minimum of 5" (126mm) ceiling void is required to install the integral driver from below the ceiling.



Multiple luminaire configurations for plaster trim. See Multiple Luminaire configuration sheet for details.

Ordering Information												
Model	Fixation	Power ¹	CRI	CCT ²	Driver ³	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing ⁴	Options
WG-75RPTA			92									
WG-75RPTA	RPT RBT	L M H	92	27 30 35 40	S010 D010 SPH PEQ0 D2S RS010 RD010 RD2S X	RRC RRPH	OA RSC	12 25 36	W B S F	W B S F	LP NC IC CP X	WL MLC AS ASL HL EM AWNRF

Luminaire

- Part of a complete family of 3" aperture matching downlights.
- 3" round aperture recessed adjustable downlight with 1.6" diameter regressed light aperture.
- Tilt 40°, rotation 360° (continuous).
- Efficacy up to 68 lumens per watt (delivered).
- CREE 2-step MacAdam LEDs (12° Beam 3-step).
- CRI 92+ standard.
- L70 (TM21 Projected 85°C) Static White 66,500 hours (12° Beam 109,000 hours).
- ETL and ETL-C for dry and damp locations, Wet location optional.
- Luminaire installed and maintained from below the ceiling. Maximum ceiling thickness 1".
- Housings available (see housings page).
- Multiple luminaire configurations for plaster trim (see detail page).
- 5-year warranty.

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power¹

- L = Low Power, 5.6W @ 350mA (3.9W for 12° Beam)
- M = Mid Power, 8.1W @ 500mA (5.8W for 12° Beam)
- H = High Power, 11.5W @ 700mA (8.3W for 12° Beam)

CRI

- 92 = 92 CRI

CCT³

- 27 = 2700K
- 30 = 3000K
- 35 = 3500K
- 40 = 4000K

Integral Driver³

- S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)
- D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)
- SPH = Phase (2-wire) 3% dimming, 120V only (20W)
- PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)
- D2S = DALI-2 for Static White 0.1% dimming, 120-277V (22W)

Remote Driver³

- RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)
- RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)
- RD2S = Remote DALI-2 for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)
- X = No Driver

Cover

- RRC = Round Recessed Cone
- RRPH = Round Regressed Pinhole (N/A with 36° Beam)

Lens

- OA = Open Aperture
- RSC = Recessed Satin Clear Lens

Beam

- 12 = 12° Beam Angle
- 25 = 25° Beam Angle
- 36 = 36° Beam Angle

Trim Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Cover Finish

- W = White, 15% gloss, RAL 9003 (standard)
- B = Black, 15% gloss, RAL 9005
- S = Silver, 15% gloss, RAL 9006
- F = Custom finish, specify RAL code

Housing (Optional)⁴

- LP = Landing Pan
- NC = New Construction Housing
- IC = Insulated Ceiling Housing
- CP = Chicago Plenum Housing
- X = No Housing

Options

- WL = Wet Location (only available with RRC)
- MLC = Multiple Luminaire Configurations (RPT only - see detail page)
- AS = Aim Stick
- ASL = Aim Stick w/ Laser
- HL = Honeycomb Louver (specify with OA)
- EM = Emergency (remote only)
- AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S drivers only)

1. Wattage shown does not include power supplies/drivers.
 2. Refer to photometric data sheet for delivered lumens.
 3. See driver information for details.
 4. See housings pages for details