

## 3" ProTools Wall Wash Round Recessed

- Part of a complete family of 3" aperture matching downlights.
- Wall Wash with flush aperture and room side cut-off.
- High lumen output and excellent color rendition for all applications.
- Installs from below the ceiling for new and retrofit installations.
- Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
- Tunable White and Warm Dim.Quick-Snap feature for field-configurable multiple combinations.
- EZ-Click Cover installation makes installing or changing Covers easy in the field.
- Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.


|                       |  |
|-----------------------|--|
| <b>Housing</b>        | Die-caste aluminum for precision fit and heat dissipation<br>Mounting hardware for all ceiling types; trim and trimless<br>Quick-screw mounting mechanism<br>EZ-Click Cover installation<br>Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings |
| <b>Covers</b>         | Flush aperture with room-side cutoff and wall wash distribution  |
| <b>LED</b>            | 92CRI, 98CRI, 90CRI and 95CRI, 100+ lumens per watt<br>Low/Mid/High output choices<br>2700K, 3000K, 3500K, 4000K<br>Tunable White from 1800 - 4000K<br>Warm Dim from 1800 - 3000K  |
| <b>Optics</b>         | Satin spread lens optic  |
| <b>Driver</b>         | Integral and remote drivers for all dimming and non-dimming applications<br>Through-wire integral driver enclosure installed from below without the need for bulky housing<br>POE driver compatibility   |
| <b>Installation</b>   | Not required when using the Driver Enclosure   |
| <b>Housing</b>        | Optional: IC and Chicago plenum<br>Optional: New construction (with j-box and driver attached)<br>Optional: Landing pan for use with Driver Enclosure to locate cut-out locations  |
| <b>Warranty</b>       | 5-year Limited (see complete company warranty information)   |
| <b>Certifications</b> | ETL and ETL-C for dry and damp location, CE, Wet Location rated  |



Wall Wash (RWW) / Bezel Trim (RBT)



Wall Wash (RWW) / Plaster Trim (RPT)

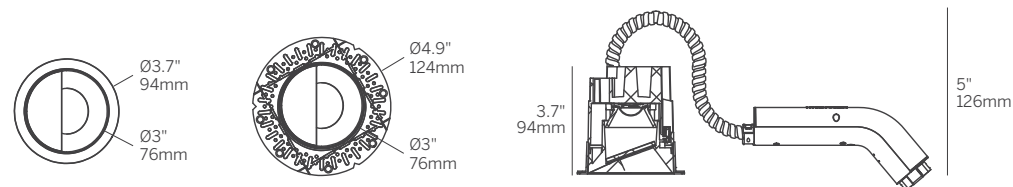

Bezel Trim (RBT)

Plaster Trim (RPT)

Minimum of 5" (126mm) ceiling void is required to install the integral driver from below the ceiling.

## 3" ProTools Wall Wash Round Recessed

| Model      | Fixation   | Power <sup>1</sup>          | CRI                          | CCT <sup>2,3</sup>   | Driver <sup>6</sup>   | Cover | Beam | Trim Finish <sup>7</sup> | Cover Finish <sup>7</sup> | Options                    |
|------------|------------|-----------------------------|------------------------------|--|---|-------|------|--------------------------|---------------------------|----------------------------|
| WG-75RPTWW | RBT<br>RPT | L<br>M<br>H<br><br>TW<br>WD | 92<br>98<br><br><br>90<br>95 | 27<br>30<br>35<br>40<br><br>TW <sup>4</sup><br>WD <sup>5</sup> | S<br>S010<br>SPH<br>PEQ0<br>RD010<br>RPEQ0<br>DALI <sup>4</sup> | RWW   | WW   | W (std)<br>S<br>F        | W (std)<br>S<br>F         | CP<br>IC<br>NC<br>LP<br>WL |

### Model

- WG-75RPTWW = 3" ProTools Wall Wash Round Recessed

### Fixation

- RBT = Recessed Bezel Trim
- RPT = Recessed Plaster Trim

### Power<sup>1</sup>

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA
- TW = 9W @500mA
- WD = 11.8W @ 350mA

### CRI

- 92 = 92 CRI
- 98 = 98 CRI
- 90 = 90 CRI (TW only)
- 95 = 95 CRI (WD only)

### CCT<sup>2,3</sup>

- (Low/Mid/High Power)
- 27 = 2700K, (727/989/1306 lm)
  - 30 = 3000K, (782/1064/1405 lm)
  - 35 = 3500K, (782/1064/1405 lm)
  - 40 = 4000K, (837/1139/1505 lm)
  - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)<sup>4</sup>
  - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)<sup>5</sup>

### Integral Driver<sup>6</sup>

- S = Standard non-dim driver, 120-277V
- S010 = Standard 10% 0-10V dimming, 120-277V
- SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V

### Remote Driver<sup>6</sup>

- RD010 = EldoLED, 1% 0-10V dimming, 120-277V
- RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, SoftOn/FadeToBlack, 120-277V
- DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V<sup>4</sup>

### Cover

- RWW = Round Wall Wash

### Beam

- WW = Wall Wash

### Trim Finish<sup>7</sup>

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

### Cover Finish<sup>7</sup>

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

### Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- WL = Wet Location

### Emergency Remote Only

- Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.

### Notes

- Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- Other lumen packages available, consult factory.
- Source lumens shown, see IES files for delivered lumens.
- Available with NC, IC or CP Housing in accessible ceiling or remote driver only.
- WD available with PEQ0 integral driver, and RD010, RPEQ0 remote drivers.
- See power supply page for details.
- See Tiger Drylac color chart: [inter-lux.com/tiger](http://inter-lux.com/tiger)

