


# 3" ProTools Wall Wash Square Recessed



Recessed Cone (SRC) / Bezel Trim (RBT)




Micro-prismatic Opal (SMPO) / Bezel Trim (RBT)

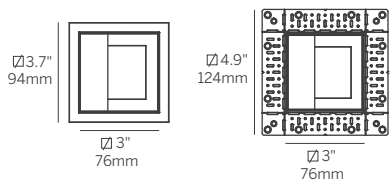


Bezel Trim (RBT)

Plaster Trim (RPT)

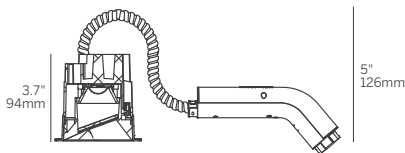

Minimum of 5" (126mm) ceiling void is required to install the integral driver from below the ceiling.



Multiple luminaire configurations for plaster trim. See Multiple Luminaire specsheet for details.

Ordering Information										
Model	Fixation	Power <sup>1,2</sup>	CRI	CCT <sup>3</sup>	Driver <sup>6</sup>	Cover	Beam	Trim Finish <sup>7</sup>	Cover Finish <sup>7</sup>	Options
WG-75SPTWW						SWW	WW			
WG-75SPTWW	RBT RPT	L M H  TW WD	92 98  90 95	27 30 35 40 TW <sup>4</sup> WD <sup>5</sup>	S S010 SPH PEQ0 RD010 RDFPN RPEQ0 DALI <sup>4</sup>	SWW	WW	W (std) S F	W (std) S F	CP IC NC LP WL

### Luminaire

- Part of a complete family of 3" aperture matching downlights.
- Wall Wash with flush aperture and room side cut-off.
- High lumen output and excellent color rendition for all applications.
- Installs from below the ceiling for new and retrofit installations.
- Very shallow ceiling depth required for both integral and remote drivers.
- Multiple luminaire configurations for plaster trim. See Multiple Luminaire specsheet for details.

### Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

### Power<sup>1,2</sup>

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA
- TW = 9W @ 500mA
- WD = 11.8W @ 350mA

### CRI

- 92 = 92 CRI
- 98 = 98 CRI
- 90 = 90 CRI (TW only)
- 95 = 95 CRI (WD only)

### CCT (Low/Mid/High Power)<sup>2,3</sup>

- 27 = 2700K, (727/989/1306 lm)
- 30 = 3000K, (782/1064/1405 lm)
- 35 = 3500K, (782/1064/1405 lm)
- 40 = 4000K, (837/1139/1505 lm)
- TW = Tunable White 1800 - 4000K, (610 - 1060 lm)<sup>4</sup>
- WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)<sup>5</sup>

### Integral Driver<sup>6</sup>

- S = Standard non-dim driver, 120-277V
- S010 = Standard 10% 0-10V dimming, 120-277V
- SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V

### Remote Driver<sup>6</sup>

- RD010 = EldoLED, 1% 0-10V dimming, 120-277V
- RDFPN = Lutron Forward Phase 1%, 120V only
- RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V<sup>4</sup>

### Cover

- SWW = Square Wall Wash

### Beam

- WW = Wall Wash

### Trim Finish<sup>7</sup>

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

### Cone Finish<sup>7</sup>

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

### Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- WL = Wet Location

### Emergency Remote Only

- Emergency LED battery backup available, order separately

1. Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
2. Other lumen packages available, consult factory.
3. Source lumens shown, see IES files for delivered lumens.
4. Available with NC, IC or CP Housing in accessible ceiling for remote driver only.
5. WD available with PEQ0 integral driver, and RD010, RDFPN, RPEQ0 remote drivers.
6. See power supply page for details.
7. See Tiger Drylac color chart: [inter-lux.com/tiger](http://inter-lux.com/tiger)