


3" ProTools Wall Wash Square Recessed



3" square recessed wall washer with rectangular regressed light aperture with flush kick reflector.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Multiple Luminaire Configurations feature allows endless multiple combinations without specialized housings
Covers	SWW - Square Wall Wash with flush room-side cutoff and wall wash spread lens
LED	Constant Current, 92+ CRI (standard), 98 CRI / 95 CRI WD (optional), 2-Step MacAdam Low/Mid/High output choices (delivers up to 57 lumens per watt) 2700K, 3000K, 3500K, 4000K Tunable White (1800 - 4000K) Warm Dim (1800 - 3000K) L70 (TM21 Projected 85° C) Static White = 55,400 hours TW + WD = 55,000 hours
Beam	WW - Wall wash provided with Satin spread lens
Driver	Integral and remote drivers for all dimming and non-dimming applications Non-Dim, 0-10V, Phase, Lutron and DALI driver options Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation Housing	Not required when using the Driver Enclosure LP - Landing Pan NC - New Construction IC - Insulated Ceiling CP - Chicago Plenum
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location (WL Wet Location optional), CE

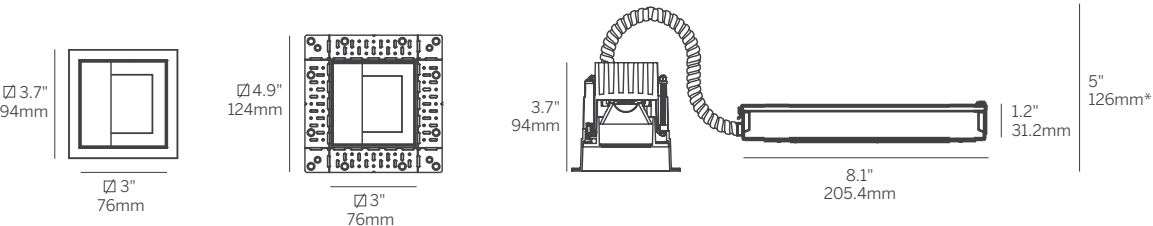

RBT / RWW
RPT / RWW

90 Whitegoods Downlights



RBT / SWW / WWL



RPT / SWW / WWL

3" ProTools Wall Wash Square Recessed

Model	Fixation	Power ¹	CRI	CCT ²	Driver ³	Cover	Lens	Beam	Trim Finish	Cover Finish	Housing ⁴	Options
WG-75SPTWW	RBT RPT	L M H TW WD	92 98 92 95	27 30 35 40 TW WD	S010 D010 SPH PEQ0 D2S RS010 RD010 RD2S RD2T X	SWW	WWL	WW	W S F	W S F	LP NC IC CP X	WL MLC EM AWNRF

Model <ul style="list-style-type: none">WG-75SPTWW = 3" ProTools Wall Wash Square Recessed	Cover <ul style="list-style-type: none">SWW = Square Wall Wash
Fixation <ul style="list-style-type: none">RBT = Recessed Bezel TrimRPT = Recessed Plaster Trim	Lens <ul style="list-style-type: none">WWL = Wall Wash Spread Lens
Power¹ <ul style="list-style-type: none">L = Low Power, 5.7W @ 350mAM = Mid Power, 8.4W @ 500mAH = High Power, 12W @ 700mATW = 9W @ 500mAWD = 11.8W @ 350mA	Beam <ul style="list-style-type: none">WW = Wall Wash
CRI <ul style="list-style-type: none">92 = 92 CRI (Static White, TW only)98 = 98 CRI (Static White)95 = 95 CRI (WD only)	Trim Finish <ul style="list-style-type: none">W = White, 15% gloss, RAL 9003 (standard)S = Silver, 15% gloss, RAL 9006F = Custom finish, specify RAL code
CCT² <ul style="list-style-type: none">27 = 2700K30 = 3000K35 = 3500K40 = 4000KTW = Tunable White 1800 - 4000KWD = Warm Dimming 1800 - 3000K	Cover Finish <ul style="list-style-type: none">W = White, 15% gloss, RAL 9003 (standard)S = Silver, 15% gloss, RAL 9006F = Custom finish, specify RAL code
Integral Driver³ <ul style="list-style-type: none">S010 = eldoLED 0-10V 1% dimming, 120-277V (22W)D010 = eldoLED 0-10V 0.1% dimming, 120-277V (22W)SPH = Phase (2-wire) 3% dimming, 120V only (20W)PEQ0 = Lutron Hi-Lume Premier 0.1% EcoSystem dimming, 120-277V (20W)D2S = DALI-2 (DT6) for Static White 0.1% dimming, 120-277V (22W)	Housing (optional)⁴ <ul style="list-style-type: none">LP = Landing PanNC = New Construction HousingIC = Insulated Ceiling HousingCP = Chicago Plenum HousingX = No Housing
Remote Driver³ <ul style="list-style-type: none">RS010 = Remote eldoLED 0-10V 1% dimming, 120-277V (22W, 50W or 100W)RD010 = Remote eldoLED 0-10V 0.1% dimming, 120-277V (22W, 50W or 100W)RD2S = Remote DALI-2 (DT6) for Static White 0.1% dimming, 120-277V (22W, 50W or 100W)RD2T = Remote DALI-2 (DT8) for Tunable White 0.1% dimming, 120-277V (30W, 50W or 75W)X = No Driver	Options <ul style="list-style-type: none">WL = Wet LocationMLC = Multiple Luminaire Configurations (RPT only - see detail page)EM = Emergency (remote only)AWNRF = Lutron Athena Wireless Node RF (RS010, RD010, RD2S, RD2T drivers only)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- Wattage shown does not include power supplies/drivers.
 - See photometric data sheet for delivered lumens.
 - See driver information for details.
 - See housings pages for details.

