


3" ProTools Wall Wash Square Recessed


WG-75SPTWW-...-SWW-WW-W-W						
Delivered Lumens						
CRI-CCT ¹	POWER					
	L [5.7W]	M [8.4W]	H [12.0W]	TW [9.1W]	WD [11.8W]	
	92-27	354	489	649	-	-
92-30	381	526	698	-	-	
92-35	381	526	698	-	-	
92-40	408	563	747	-	-	
90-TW	-	-	-	518	-	
95-WD	-	-	-	-	536	

UGR ²		
L [5.7W]	M [8.4W]	H [12.0W]
31.2	32.3	33.3



Beam Angle (0-180) = 39.6
Beam Angle (90-270) = 49.3

ISOILLUMINANCE DIAGRAM - HIGH POWER 3500K
SWW WW³
WG-75SPTWW-...-H-92-35-...-SWW-WW-W-W⁴

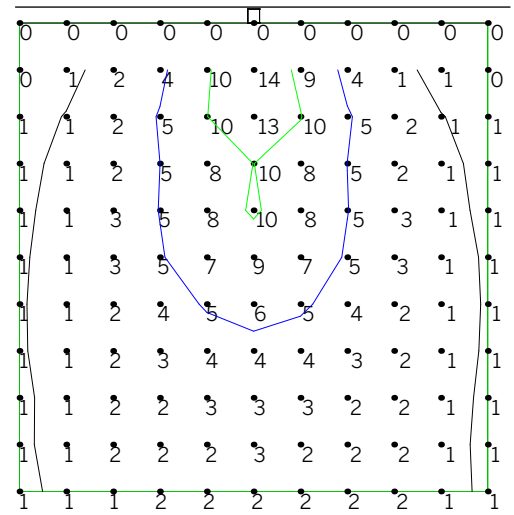

Value [Fc]	Color	Value [Fc]	Color
1	Black	20	Red
5	Blue	25	Magenta
10	Green	30	Dark Blue
15	Cyan	35	Dark Green

CRI-CCT MULTIPLIER					
92-27	92-30	92-35	92-40	90-TW	95-WD
0.93	1.00	1.00	1.07	0.74	0.77

POWER MULTIPLIER		
L [5.7W]	M [8.4W]	H [12.0W]
0.55	0.75	1.00

1 98CRI LEDs provide approximately 20% less lumens than 92CRI LED values noted in Delivered Lumens chart.
2 UGR value noted is the maximum UGR (crosswise) with 92-35 LEDs at noted Power level.
3 Illuminance values in foot-candles for the fixture part number noted. Illuminance points spaced 1'-0" on center.
4 Fixture is offset 2'-0" from the illuminated surface.