


# 20 Linear Mini Edgeless Cove

## WG-20MEC-...-SD-W

Delivered Lumens Per Foot

	Power						
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] <sup>2</sup>	H [8.0 W/ft]
CCT 927	226	437	821	1262	-	-	-
930	236	455	855	1315	-	-	-
935	244	471	886	1362	-	-	-
940	247	484	909	1399	-	-	-
TW <sup>1</sup>	131	237	425	645	-	-	-
WD <sup>1</sup>	-	-	-	-	190	394	569
RGBW <sup>2</sup>	-	-	-	-	-	322	-




Beam Angle (0-180) = 80.2  
Beam Angle (90-270) = 100.7

## WG-20MEC-...-OD-W

Delivered Lumens Per Foot

	Power						
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] <sup>2</sup>	H [8.0 W/ft]
CCT 927	160	311	584	898	-	-	-
930	168	324	608	935	-	-	-
935	174	335	630	969	-	-	-
940	175	344	647	995	-	-	-
TW <sup>1</sup>	93	169	302	458	-	-	-
WD <sup>1</sup>	-	-	-	-	135	280	405
RGBW <sup>2</sup>	-	-	-	-	-	229	-



Beam Angle (0-180) = 110.1  
Beam Angle (90-270) = 110.1

	Power Multiplier						
	P0 [1.5 W/ft]	P1 [3 W/ft]	P2 [6 W/ft]	P3 [10 W/ft]	L [2.7 W/ft]	M [5.5 W/ft] <sup>2</sup>	H [8.0 W/ft]
9XX	0.18	0.35	0.65	1.00	-	-	-
TW	0.10	0.17	0.31	0.47	-	-	-
WD	-	-	-	-	0.14	0.29	0.42
RGBW	-	-	-	-	-	0.24	-


CCT Multiplier			
927	930	935	940
0.93	0.97	1.00	1.03

- 1 TW lumen data at maximum output (4000K). WD lumen data at maximum output (3000K).
- 2 RGBW lumen data at maximum output with 3000K White LED. M-RGBW power level wattage is 7.6W/ft.
- 3 Polar Plot and Isofootcandle diagram are applicable to part number noted; use Multiplier table(s) to approximate other Power / CCT options.


# 20 Linear Mini Edgeless Cove

## Isoilluminance


**WG-20MEC-...-S-...-P1-935-SD-W**  
**10'-0" ceiling height**  
 Satin clear diffuser

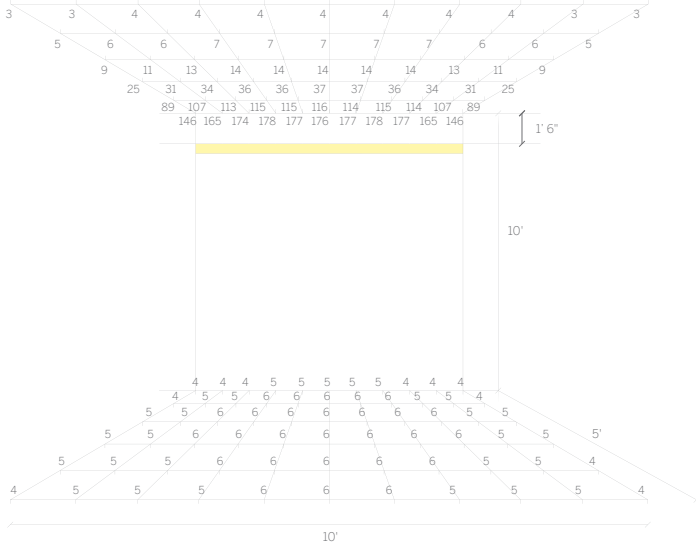


**WG-20MEC-...-S-...-P1-935-OD-W -- ISO**  
**10'-0" ceiling height**  
 Satin opal diffuser

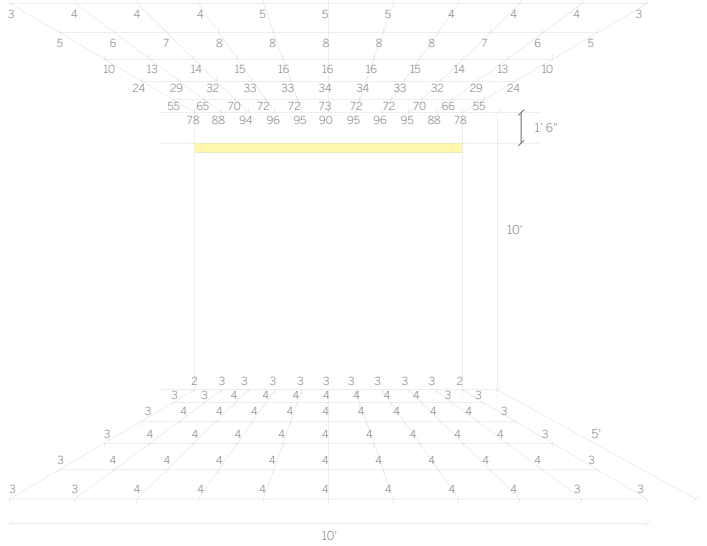

**WG-20MEC-...-S-...-P3-935-SD-W**  
**20'-0" ceiling height**  
 Satin clear diffuser

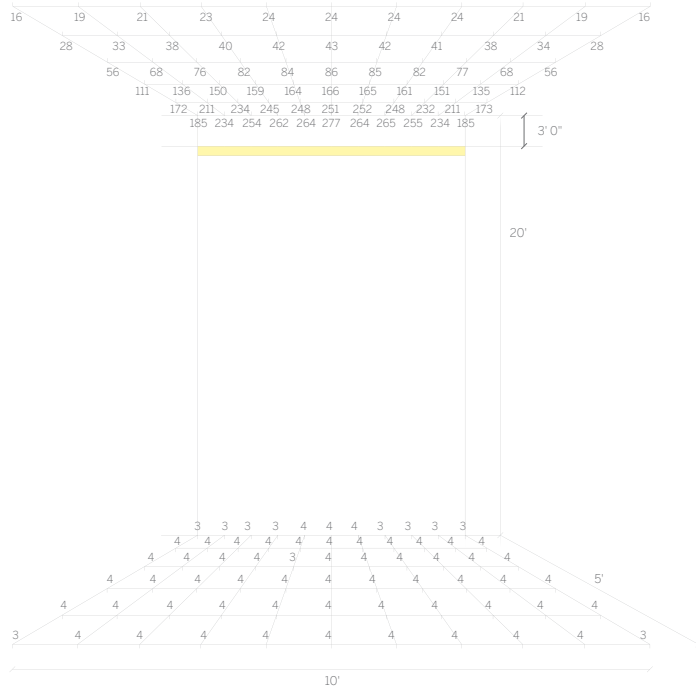

**WG-20MEC-...-S-...-P3-935-OD-W**  
**20'-0" ceiling height**  
 Satin opal diffuser

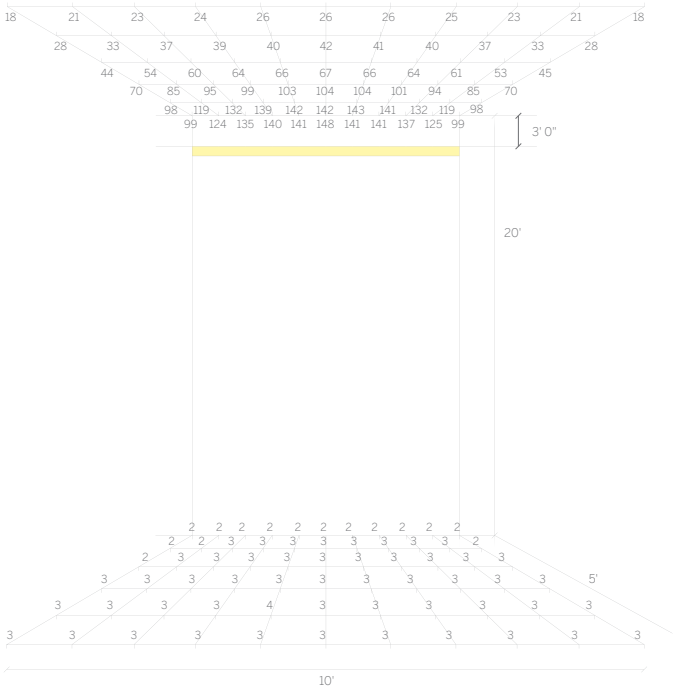

Surface reflectances:

80% Ceiling

50% Wall

20% Floor

Illuminance points are spaced 1'-0" on center.

Illuminance values are shown in units of foot-candles.