


Constant Voltage drivers

Wiring Key Points

1. This product shall be installed by a qualified electrician.
2. Make sure the main power supply to the driver is turned off when wiring either the LEDs or driver.
3. LEDs shall be wired in parallel as shown in wiring diagram. CAUTION: incorrect wiring may damage LEDs.
4. Wire shall be #18AWG stranded minimum. Large gauge wire shall be used to limit voltage drop in order to maintain the proper operating voltage. Take every precaution to avoid interference from other electrical circuits and equipment.
5. Dimming circuits are more sensitive to voltage drop and electrical interference from other electrical sources.
6. Isolating LED wiring by dedicated circuit for each control zone is recommended.
7. Contractor shall verify the fixture quantities connected to the driver are compatible with the driver's specifications prior to energizing the circuit.
8. All Class II power cable remote wiring by others.

LED's can be permanently damaged if these points are not followed

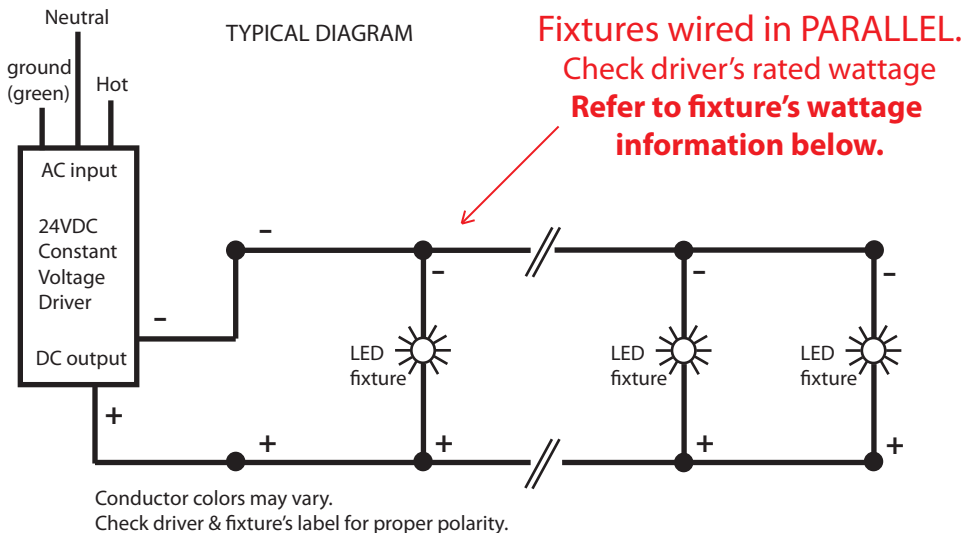

Fixture

Nominal Length

Watts/fixture

**PLEASE NOTE: THIS DRIVER REQUIRES A
MINIMUM LOAD OF 2 WATTS**

inter•lux

Project:

Type:

Date:

Manufacturer: LINEALIGHT

Fixture:

Page:


1 OF 10

Hi-lume Premier 0.1% EcoSystem/3-wire Constant Voltage 24 V $\overline{=}$ LED Driver with Soft-on, Fade-to-Black

The Hi-lume Premier 0.1% Constant Voltage Driver (L3D0) is a high-performance LED driver capable of controlling up to 96 W of 24 V $\overline{=}$ constant voltage loads. This driver provides smooth and continuous dimming down to 0.1% low-end. It is ideal for use with strip lighting in applications such as coves, under or over cabinet lighting and pathway lighting. The driver is UL \circ Listed with an integrated wiring compartment and can be mounted up to 150 ft (45 m) away from the load.

Features

- Continuous, flicker-free dimming from 100% to 0.1%¹.
- Soft-on, Fade-to-Black operation for EcoSystem controls: fades smoothly between 0% and 0.1% when turned on and off for an incandescent like experience.²
- PWM dimming meets IEEE1789 over the entire dimming range.
- UL \circ Listed for United States and Canada (cULus \circ).
- NOM certified for Mexico.
- Field Adjustment Knob offers customer low-end light output tuning for better fixture-to-fixture matching.
- Guaranteed dimming performance when used with Lutron controls:
 - HomeWorks QS, Energi Savr Node units with EcoSystem controls, GRAFIK Eye QS with EcoSystem controls, PowPak with EcoSystem dimming modules, PowPak with EcoSystem wireless fixture controls, and Quantum systems, allowing for integration into a planned or existing EcoSystem lighting control solution.
 - Lutron 3-wire controls and interfaces.
- Protected from miswires of input power, up to 277 V \sim , to EcoSystem control inputs.
- Rated lifetime of 50,000 hours at 40 °C (104 °F) ambient temperature and maximum loading.
- FCC Part 15
 - Class A (277 V \sim)
 - Class B (120 V \sim)
- Inrush limiting allows full loading of circuit breakers without nuisance tripping.
- 100% end-of-line performance tested at a Lutron factory.
- RoHS compliant.
- Restores all settings after power failure.
- Barrier provided for Class 2 separation in the wiring compartment.
- Redundant connections on line and control terminals for easy daisy chain wiring.
- Redundant connections on output terminals allow for easy wiring of two LED load home runs.
- Class 2 output designed to withstand hot swap.
- For more information please visit: www.lutron.com

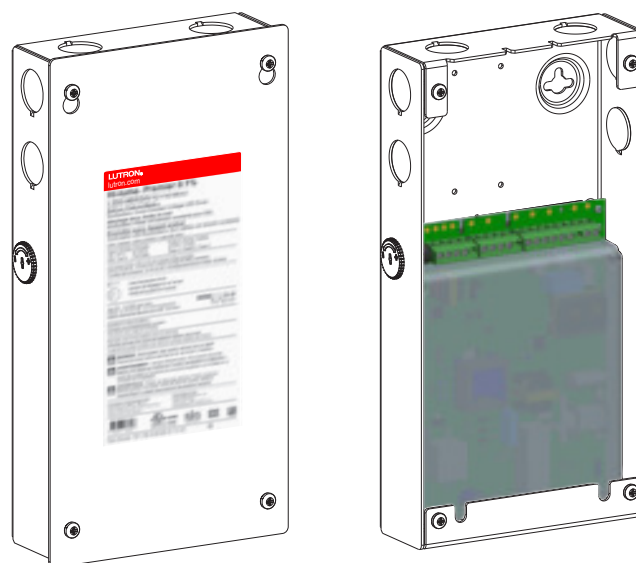

Hi-lume Premier 0.1% Constant Voltage Driver (L3D0)
5.5 in (140 mm) W x 2.0 in (51 mm) H x 10.5 in (267 mm) L

¹ Light output at 0.1% depends on installation and light engine efficacy.

² Soft-on, Fade-to-Black dimming technology is not available for 3-wire controls.

| | | |
|----------------------|----------------------|----------------------|
| Job Name: | Model Numbers: | |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number: | <input type="text"/> | <input type="text"/> |

Specifications

Regulatory Approvals and Compliance

- Lutron Quality Systems registered to ISO 9001.2015
- Manufacturing facilities employ ESD reduction practices that comply with the requirements of ANSI/ESD S20.20
- Meets ANSI C62.41 category A surge protection standards up to and including 4 kV
- FCC Part 15
 - Class A (277 V~)
 - Class B (120 V~)
- CAN ICES-005 (A) (277 V~)
- CAN ICES-005 (B) (120 V~)
- LED drivers need to meet certain performance criteria in order for the completed luminaires to comply with the ENERGY STAR® Luminaires V2.0 Specification. All models meet these performance criteria throughout their entire load compatibility regions. Consult Application Note #599 “ENERGY STAR® Luminaires V2.0 and Lutron Drivers” for availability dates of compliant products.
- LED drivers need to meet certain performance criteria in order for the completed luminaires to comply with Title 24 requirements as detailed in CEC-400-2015-037-CMF. All models meet both commercial (at 120 V~/277 V~) and residential (at 120 V~) performance criteria throughout their entire load operating regions. Consult CEC-400-2015-032-CMF Section 6.2.7 for important information on meeting start-up time requirements with fade-in lighting.
- Meets UL® 8750/CSA C22.2 No. 250.13-14, “Light Emitting Diode (LED) Equipment For Use in Lighting Products”
- NOM certified
- Class 2 output; meets UL® 1310/CSA C22.2 No. 223-M91

Performance

- Dimming Range: 100% to 0.1%¹
- LED lighting turns on to any dimmed level without flashing to full brightness
- Operating Voltage: 120 V~ to 277 V~ at 50/60 Hz
- Rated lifetime of 50,000 hours at 40 °C (104 °F) ambient temperature and maximum loading
- For rated warranty, ambient temperature (ta) not to exceed 40 °C (104 °F) (maximum rated temperature)^{2,3}
- Patented thermal fold back protection
- Non-volatile memory restores all driver settings after power failure
- Typical standby power consumption: 0.25 W at 120 V~ and 0.4 W at 277 V~
- Open-circuit protected output
- Short-circuit and overload-protected output
- Output: 24 V== constant voltage at high-end
- Output Load Range: 2 W to 96 W at high-end
- PWM dimming frequency: meets IEEE1789 at all dim levels
- Power Factor: > 0.90 at maximum power
- Total Harmonic Distortion (THD): < 20% at maximum power
- NEMA 410 – 2011 compliant
- Inrush Current Limiting Circuitry: decreases circuit breaker tripping, switch arcing and relay failure; allows full loading of switch leg
- Inrush Current: < 2 A
- Device turn-on time: < 100 ms from electronic off and, < 500 ms from power off
- L3D0-96W24V-U driver is programmed by Lutron manufacturing and is NOT configurable by the Lutron QwikFig configuration system
- NOM Thermal Classification: Class B

¹ Light output at 0.1% depends on installation and light engine efficacy.

² To maintain warranty, installer is responsible for ensuring that the driver ambient temperature does not exceed 40 °C (104 °F).

³ Where ta is the temperature of the air directly surrounding the driver.

| | | |
|--|---|----------------------|
| Job Name: <input type="text"/> | Model Numbers: <input type="text"/> | |
| Job Number: <input type="text"/> | <input type="text"/> | <input type="text"/> |

Specifications *(continued)*

Environmental

- Sound rated: Class A inaudible in 24 dBA ambient
- Relative Humidity: maximum 90% non-condensing
- Minimum Operating Ambient Temperature: $t_a = 0^\circ\text{C}$ (32°F)¹
- Indoor use only
- Rated for dry and damp locations
- Meets NEC® requirements for installation in “other space used for environmental air”²
- Meets the Canadian National Building Code Plenum Requirements for a concealed space used as a plenum within a floor or roof assembly
- Maximum heat output of module: 46 BTU/hour

Driver Wiring and Mounting

For best installation practices, please refer to Application Note #591 at www.lutron.com.

- Mount the driver in a position where it can be easily located and accessed if service or troubleshooting is necessary.
- Driver is grounded by terminal connection
- Terminal blocks on the driver accept solid or stranded wire per terminal from 20 AWG to 12 AWG (0.50 mm^2 to 2.5 mm^2).
- Maximum wire length between the LED driver and the start of the linear strip for different wire sizes is listed below. The table below can be used independently of the line voltage that is powering the LED Driver.


| Wire Gauge | Maximum Lead Length |
|--|---------------------|
| 24 AWG (0.20 mm^2) ³ | 6 ft (1.8 m) |
| 22 AWG (0.34 mm^2) ³ | 10 ft (3.0 m) |
| 20 AWG (0.50 mm^2) | 15 ft (4.5 m) |
| 18 AWG (0.75 mm^2) | 25 ft (7.62 m) |
| 16 AWG (1.0 mm^2) | 40 ft (12.2 m) |
| 14 AWG (1.5 mm^2) | 60 ft (18.3 m) |
| 12 AWG (2.5 mm^2) | 100 ft (30.5 m) |
| 10 AWG (4.0 mm^2) ³ | 150 ft (45.7 m) |

¹ Where t_a is the temperature of the air directly surrounding the driver.

² Additional considerations may be required based on state and local codes and standards.

³ To use wire gauge larger or smaller than terminal blocks' rated gauge of 20 AWG to 12 AWG (0.50 mm^2 to 2.5 mm^2), connect 1 ft (0.3 m) or less of rated wire from terminal and connect with larger or smaller wire.

Terminal Block Details

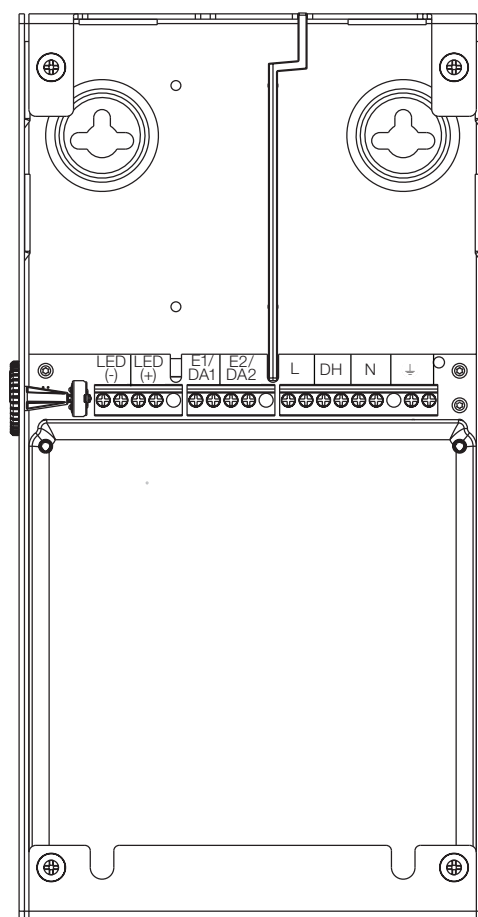

| | | |
|--|---|----------------------|
| Job Name: <input type="text"/> | Model Numbers: <input type="text"/> | |
| Job Number: <input type="text"/> | <input type="text"/> | <input type="text"/> |


Models Available

| | | Model | Input Voltage (V~) | Input Current ¹ (A) | Typical Power Factor ¹ | Typical THD ¹ (%) | Output Power (W) | Output Voltage ¹ (V=) |
|--|--------------------------------------|---------------|--------------------|--------------------------------|-----------------------------------|------------------------------|------------------|----------------------------------|
| 3-Wire or EcoSystem Control ² | For 24 V= Constant Voltage LED Loads | L3D0-96W24V-U | 120 | 0.92 | 0.99 | 8 | 2-96 | 24 |
| | | | 277 | 0.40 | 0.94 | 13 | 2-96 | 24 |


¹ At maximum output power.

² For wiring options, see *Wiring* section, pages 9-11.


Efficiency vs. Output Power

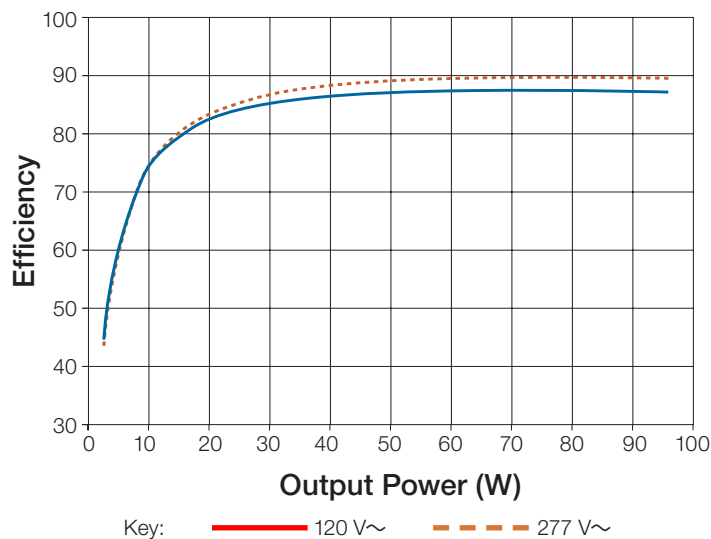

THD vs. Output Power

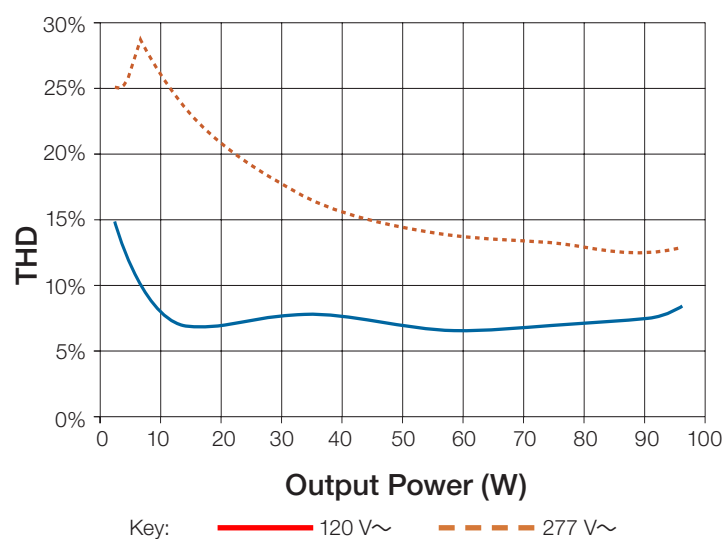


Power Factor vs. Output Power

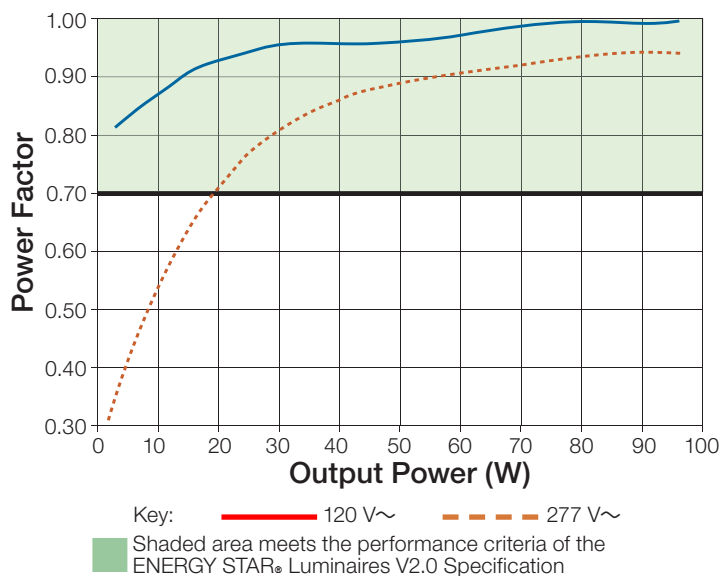

NOTE: Specifications are subject to change without notice.


Output Voltage vs. Output Power

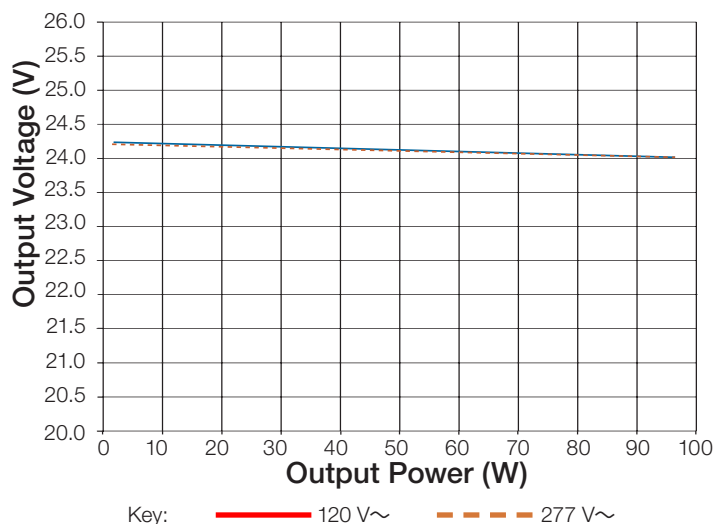

| | | |
|----------------------|----------------------|----------------------|
| Job Name: | Model Numbers: | |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number: | <input type="text"/> | <input type="text"/> |

Enclosure Dimensions


Measurements are shown as: in (mm)

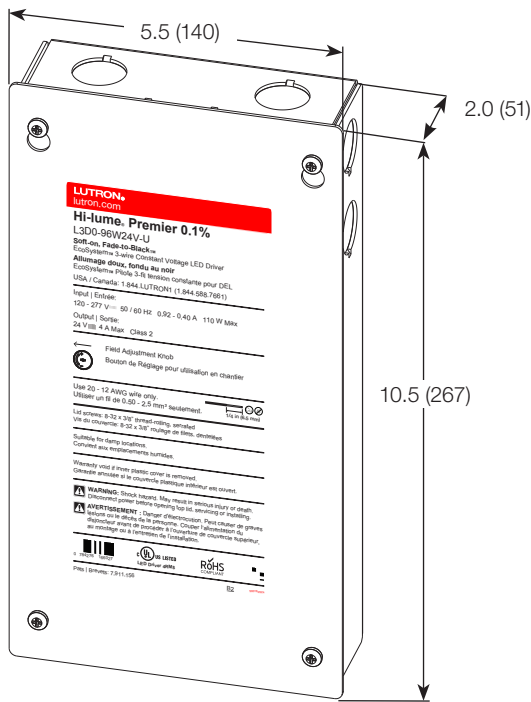

Knockouts

- Sides
 - 4 locations: 1/2 in or 21 mm trade size
- Top
 - 2 locations: 1/2 in or 21 mm trade size

Mounting Options^{1,2}

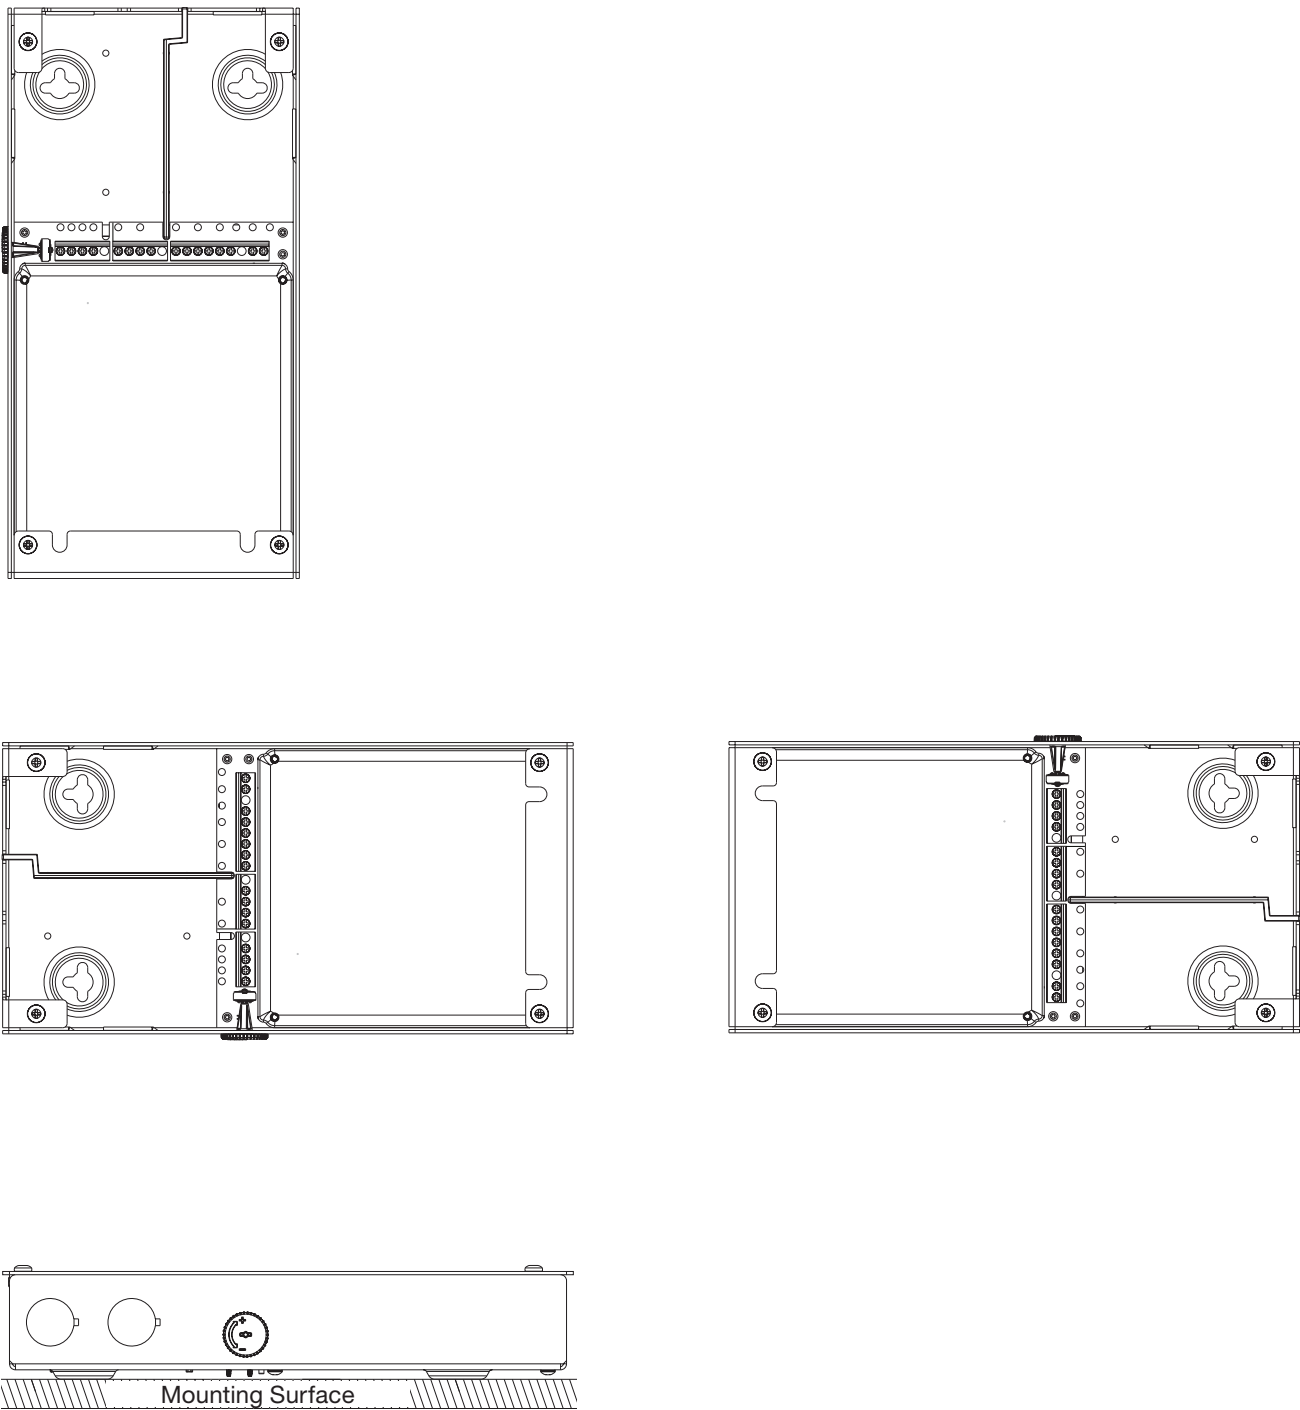


¹ Any other mounting configuration will require additional mechanical support. Improper installation may result in hazards to personnel or property.

² Mount the driver in a position where it can be easily located and accessed if service or troubleshooting is necessary.


Barrier Installation and Driver Spacing Requirements

Measurements are shown as: in (mm)


Option 1

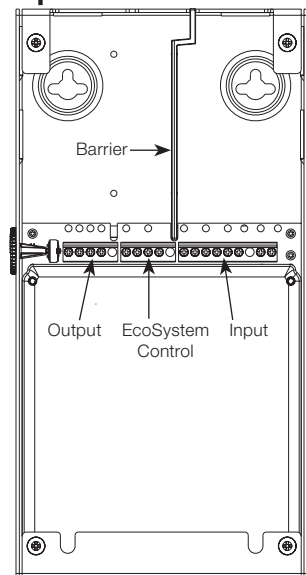

Option 2

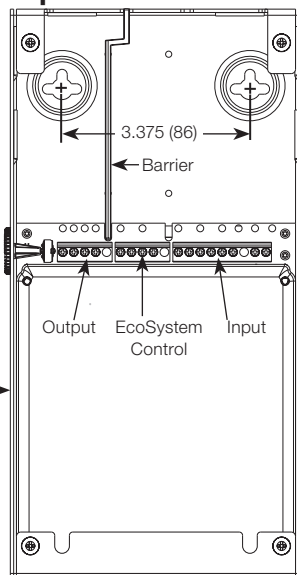

- Optional barrier can be placed either between the input and EcoSystem control terminals (**Option 1**) when the EcoSystem links are wired as Class 2 or between the EcoSystem control and output terminals (**Option 2**) when the EcoSystem links are wired as Class 1.
- For 3-wire control, barrier could be placed in either location.
- The EcoSystem digital link may be wired as Class 1 or Class 2. Please refer to Application Note #142 at www.lutron.com.
- Maintain a minimum of 3.0 in (76 mm) between any two Hi-lume Premier 0.1% drivers.

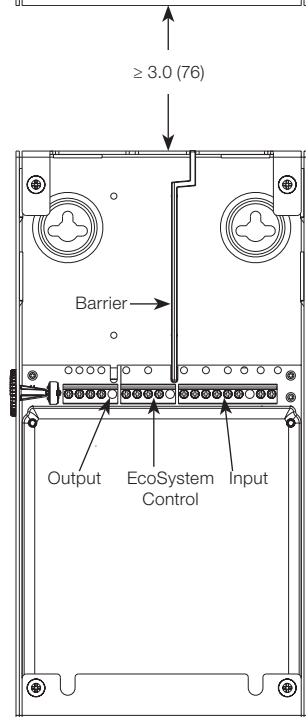

Job Name:



Model Numbers:

Job Number:

Control Mounting Options *(continued)*

A PowPak Wireless Fixture Control can be mounted on the driver using the driver's available knockouts. Additional considerations may be required based on state and local codes and standards.

PowPak Dimming Module
Model RMJ-ECO32-DV-B
OR
PowPak Fixture Control¹
Model FCJ-ECO, FCJS-ECO

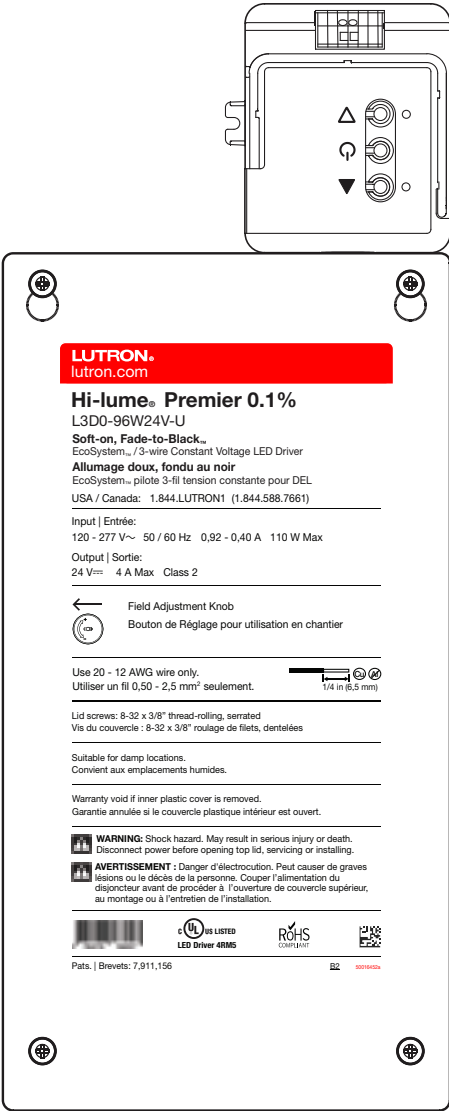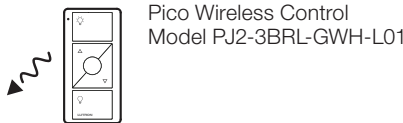

Hi-lume Premier 0.1% Constant Voltage Driver
Model L3D0-96W24V-U


¹ The wireless fixture control will need to have its low-end level reprogrammed to dim to 0.1% output. For more detail on adjusting the low-end light level, refer to Application Note #556 at www.lutron.com, call 1.877.346.5338 (U.S.A. and Canada only), or email LEDs@lutron.com

| | | | |
|--------------------------------|--|----------------|--------|
| LUTRON SPECIFICATION SUBMITTAL | | | Page 8 |
| Job Name: | | | |
| Job Number: | | Model Numbers: | |

Wiring

L3D Models: 3-Wire Controls (third wire required for control signal)

Wiring Diagram

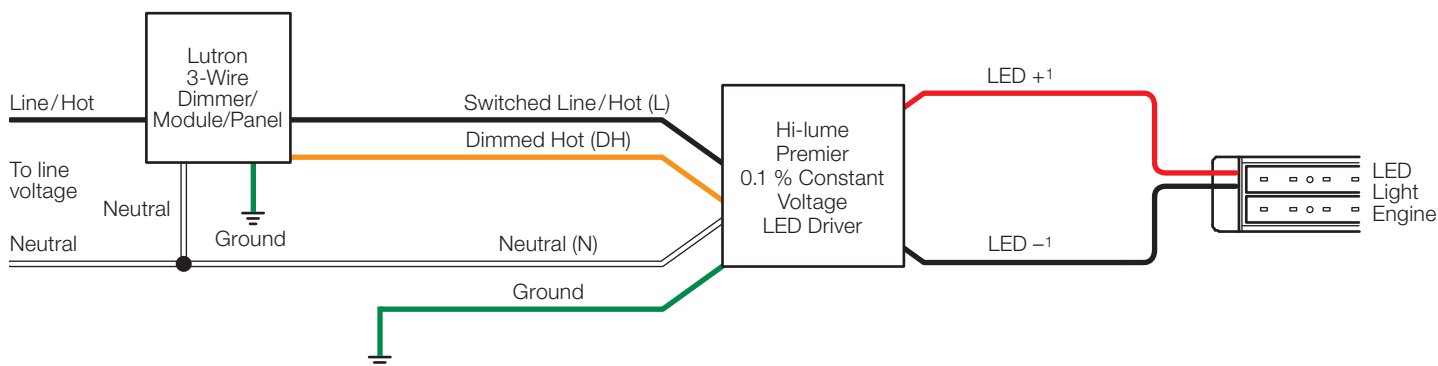

Compatible Controls without Soft-on, Fade-to-Black dimming technology: Lutron 3-Wire Controls⁵

Guaranteed performance specifications with the controls listed in the chart below.

For assistance selecting controls, contact our LED Center of Excellence at **1.877.346.5338** (U.S.A. and Canada only) or **LEDs@lutron.com**

| Product | Model Number | | Drivers per Control ² | | Load Type | Low-end Trim Setting |
|-------------------------|---------------|-----------------|----------------------------------|--------|-------------------------------|----------------------|
| | 120 V~ | 277 V~ | 120 V~ | 277 V~ | | |
| Nova T★ dimmer | NTF-10- | NTF-10-277- | 1-16 | 1-19 | — | — |
| | NTF-103P- | NTF-103P-277- | 1-8 | 1-14 | — | — |
| Nova dimmer | NF-10- | NF-10-277- | 1-16 | 1-19 | — | — |
| | NF-103P- | NF-103P-277- | 1-8 | 1-14 | — | — |
| Skylark dimmer | SF-10P- | SF-12P-277- | 1-8 | 1-14 | — | — |
| | SF-103P- | SF-12P-277-3- | 1-8 | 1-14 | — | — |
| Diva dimmer | DVF-103P- | DVF-103P-277- | 1-8 | 1-14 | — | — |
| | DVSCF-103P- | DVSCF-103P-277- | 1-8 | 1-14 | — | — |
| Ariadni dimmer | AYF-103P- | AYF-103P-277- | 1-8 | 1-14 | — | — |
| Maestro dimmer | MAF-6AM- | MAF-6AM-277- | 1-6 | 1-14 | — | — |
| | MSCF-6AM- | MSCF-6AM-277- | 1-6 | 1-14 | — | — |
| Maestro Wireless dimmer | MRF2-F6AN-DV- | | 1-6 | 1-14 | — | — |
| RadioRA 2 dimmer | RRD-F6AN-DV- | | 1-6 | 1-14 | Dual voltage 3-wire dimmer | 21% ⁴ |
| HomeWorks QS dimmer | HQRD-F6AN-DV- | | 1-6 | 1-14 | Fluorescent 3-wire LED 3-wire | 21% ⁴ |
| Interfaces ³ | PHPM-3F-120- | — | 1-16 | — | — | — |
| | PHPM-3F-DV- | | 1-16 | 1-38 | — | — |
| | | | 1-16 | 1-38 | — | — |
| | BCI-0-10 | | 1-16 | 1-38 | — | — |
| GP dimming panels | Various | | 1-16 | 1-38 | 2-1 | — |

¹ For the maximum wire length between the LED driver and the start of the linear strip, see charts in the **Driver Wiring and Mounting** section.

² No derating required in multi-gang applications provided that the fixture-count does not exceed the quantity listed.

³ Please refer to interface specification sheet for compatible system list.

⁴ Trim level allows the ability to get to 0.1% but might result in dead travel for 1%—4% on user interface for some installations. In this instance, 22% trim level could be used to avoid dead travel but might result in >0.1% dim level.


⁵ Soft-on, Fade-to-Black dimming technology is not available for 3-wire controls.

Note: For information about Legacy product use in existing control applications, contact LEDs@lutron.com

| | | |
|--|---|----------------------|
| Job Name: <input type="text"/> | Model Numbers: <input type="text"/> | |
| Job Number: <input type="text"/> | <input type="text"/> | <input type="text"/> |

Wiring (continued)

L3D Models: EcoSystem Digital Controls

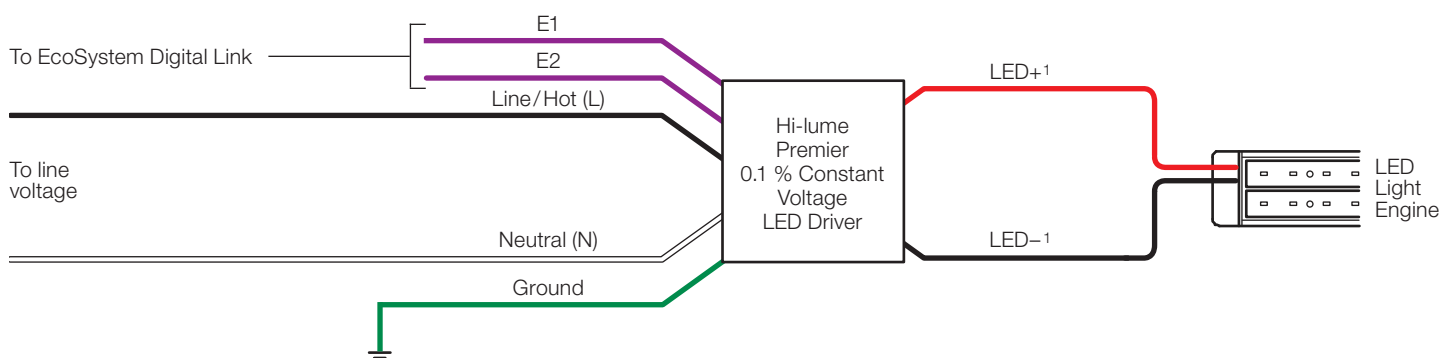

Compatible Controls with Soft-on, Fade-to-Black dimming technology: Lutron EcoSystem Digital Controls

Guaranteed performance specifications with the controls listed in the chart below.

For assistance selecting controls, contact our LED Center of Excellence at **1.877.346.5338** (U.S.A. and Canada only) or **LEDs@lutron.com**

| Product | Model Number | | Recommended System Version ³ | Drivers per Control |
|---|--|--------|---|-----------------------|
| | 120 V~ | 277 V~ | | |
| PowPak Dimming Module with EcoSystem | RMJ-ECO32-DV-B URMJ-ECO32-DVB | | 5.9 or higher | 32 per EcoSystem link |
| PowPak Wireless Fixture Control with EcoSystem ² | FCJ-ECO FCJS-ECO | | 0796554 or higher | 3 per EcoSystem link |
| Energi Savr Node unit with EcoSystem | QSN-1ECO-S, QSN-2ECO-S QSN-2ECO-PS120 UQSN-1ECO-S, UQSN-2ECO-S | | 9.027 or higher | 64 per EcoSystem link |
| GRAFIK Eye QS unit with EcoSystem | QSGRJ-_E QSGR-_E | — | 9.009 or higher | 64 per EcoSystem link |
| Quantum Light Management Hub | QP2-_P_C | — | 3.2 or higher ⁴ | 64 per EcoSystem link |
| HomeWorks QS with EcoSystem | LQSE-2ECO-D QSGRJ-_E QSGR-_E | — | 10 or higher ⁵ | 64 per EcoSystem link |

¹ For the maximum wire length between the LED driver and the start of the linear strip, see charts in the **Driver Wiring and Mounting** section.

² All devices connected to one PowPak Wireless Fixture Control will be controlled together. Devices will dim to the same level as the result of a control command. The wireless fixture control will need to have its low-end level reprogrammed to dim to 0.1% output. For more detail on adjusting low-end light level, refer to Application Note #556 at www.lutron.com.

³ For lower system versions, please visit www.lutron.com/LEDsystemcheck to check if your system requires changes.


⁴ Version 3.1 (or later) is required to dim lower than 1%.

⁵ Version 7.0 (or higher) is required to dim lower than 1%.


| | | |
|----------------------|----------------------|----------------------|
| Job Name: | Model Numbers: | |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number: | <input type="text"/> | <input type="text"/> |

Wiring (continued)**Continuous LED Light Run**

In a continuous LED light run, it is best to connect the load wires in the middle of the LED light run. Please consult load manufacturer best practices for any additional consideration in load installation.

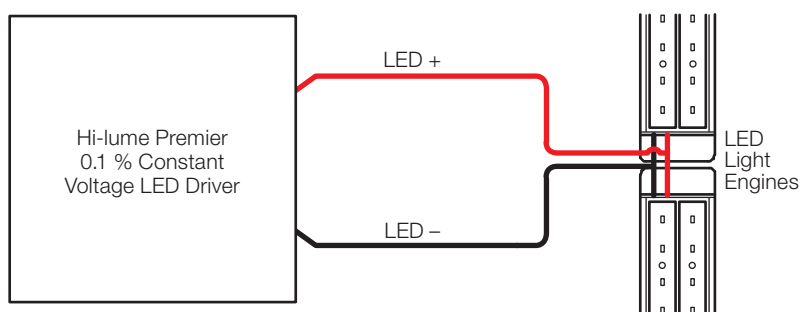

When connecting several LED light homeruns, ensure that the wire lengths and wattages match as closely as possible for best performance.

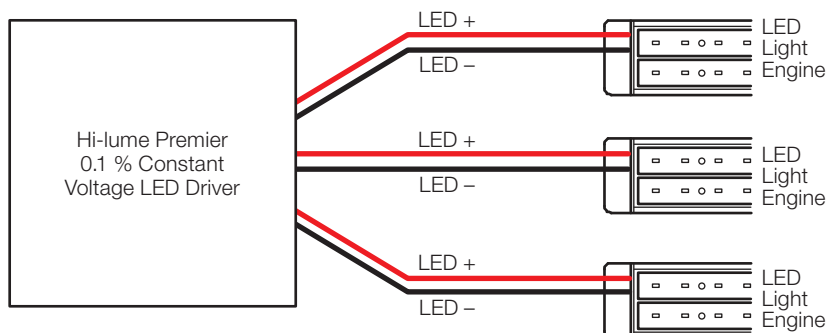

For installation best practices, please refer to Application Note #591 at www.lutron.com

| | | |
|--|---|----------------------|
| Job Name: <input type="text"/> | Model Numbers: <input type="text"/> | |
| Job Number: <input type="text"/> | <input type="text"/> | <input type="text"/> |


EcoSystem Wiring

EcoSystem Digital Link Overview

- The EcoSystem Digital Link wiring (E1 and E2) connects the digital ballasts and drivers together to form a lighting control system.
- Sensors do not connect directly to drivers. Sensors are integrated through the EcoSystem controller.
- E1 and E2 (EcoSystem Digital Link wires) are polarity-insensitive and can be wired in any topology.
- Power is supplied to the EcoSystem Digital Link from the control system.
- Protected from miswires of input power, up to 277 V~, to EcoSystem control inputs.

EcoSystem Digital Link Wiring

- EcoSystem Digital Link terminals accept 20 AWG to 12 AWG (0.50 mm² to 2.5 mm²) solid or stranded copper wire per terminal.
- Make sure that the supply breaker to the drivers and EcoSystem Digital Link Supply is OFF when wiring.
- E1 and E2 terminals of the drivers can be daisy chained as shown to the right.
- Using two different colors for E1 and E2 will reduce confusion when wiring several drivers together.
- The EcoSystem Link may be wired Class 1 or Class 2 (See Lutron Application Note #142 at www.lutron.com for more details). Consult applicable electrical codes for proper wiring practices. Ensure that the barrier placement is consistent with this wiring choice.
- For emergency wiring, please refer to Lutron Application Note #106 at www.lutron.com.

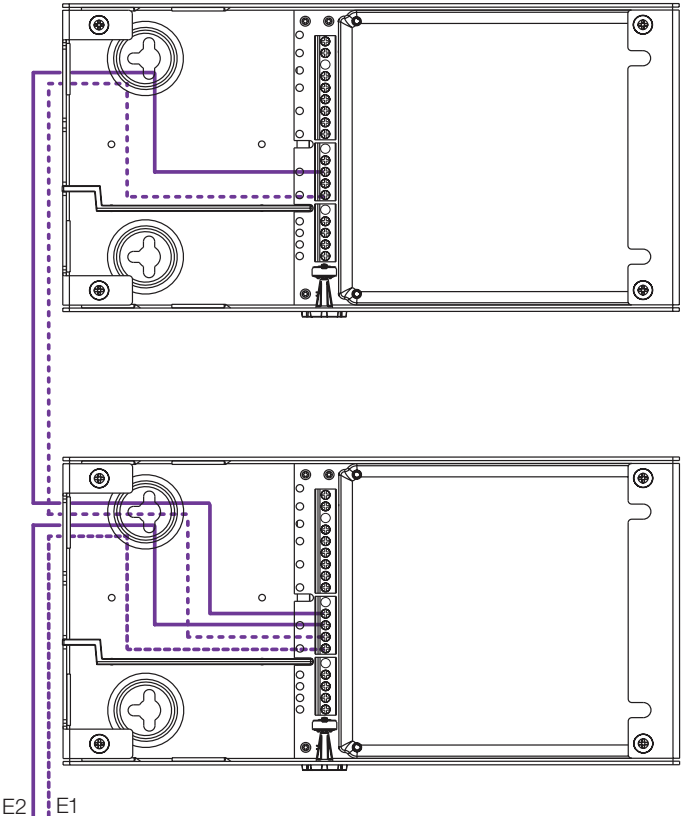

Notes

- The EcoSystem Digital Link Supply does not have to be located at the end of the Digital Link.
- EcoSystem Digital Link length is limited by the wire gauge used for E1 and E2 as follows:

| Wire Gauge | Digital Link Length (max) |
|------------|---------------------------|
| 12 AWG | 2200 ft |
| 14 AWG | 1400 ft |
| 16 AWG | 900 ft |
| 18 AWG | 550 ft |
| 20 AWG | 352 ft |

| Wire Size | Digital Link Length (max) |
|-----------|---------------------------|
| 2.5 mm² | 828 m |
| 1.5 mm² | 517 m |
| 1.0 mm² | 310 m |
| 0.75 mm² | 207 m |
| 0.50 mm² | 155 m |

Field Adjustment Knob

The Field Adjustment Knob is located on the side of the Hi-lume Premier 0.1% Constant Voltage Driver (L3D0) enclosure. This feature enables the customer to tune the lowest light output achieved during normal operation. An example of this scenario is shown in the image below. Adjusting the Field Adjustment Knob of the lower light output driver minimizes the light output difference and sets the low-end light level at 0.1%. This feature **only needs** to be used in cases of mismatched loads that are separately controlled by 2 or more units.

Figure 1: Cove Lighting with Mismatched Light Output at Low-End Due to Installation Variability


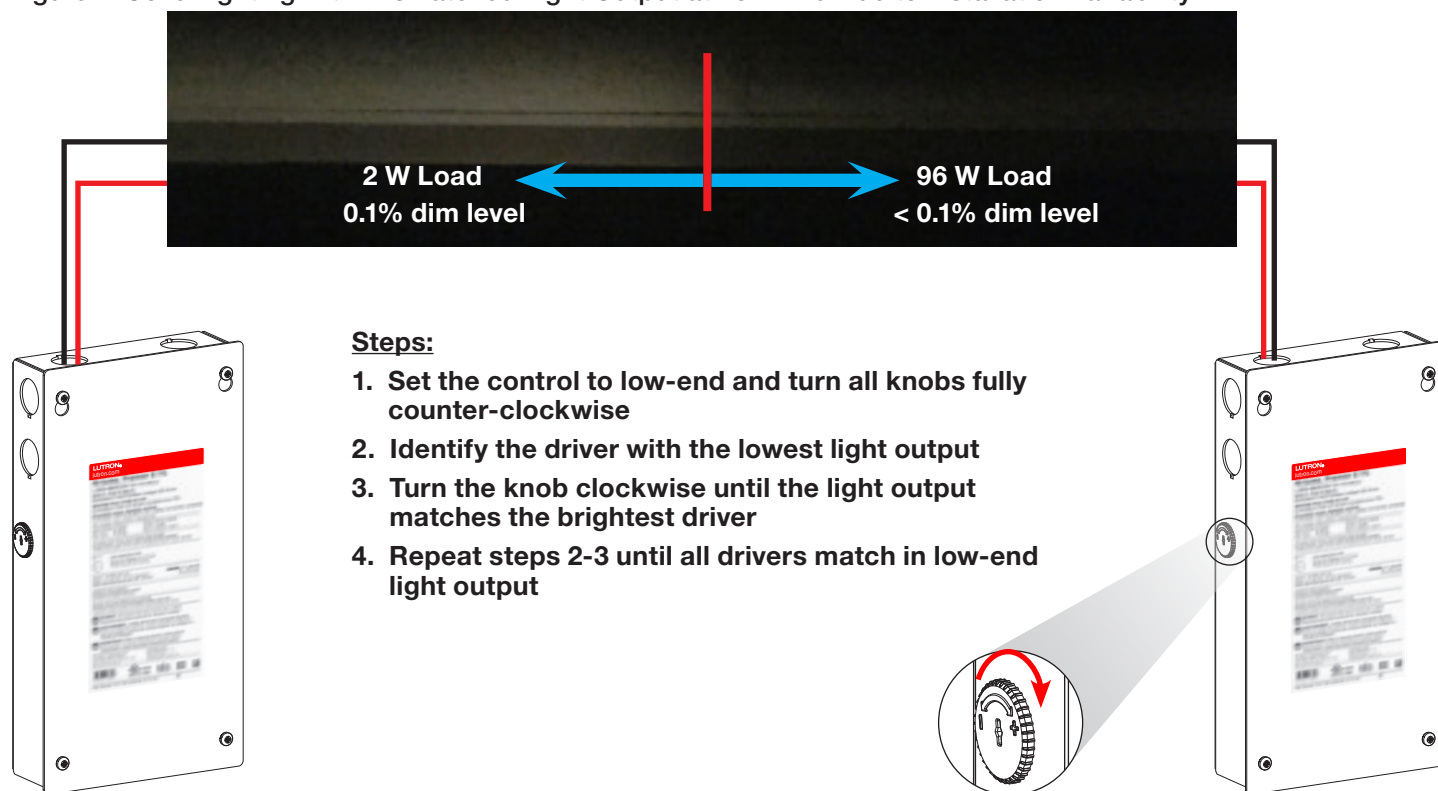


Figure 2: Cove Lighting After the Use of the Field Adjustment Knob Eliminates Mismatch without Costly Re-wiring

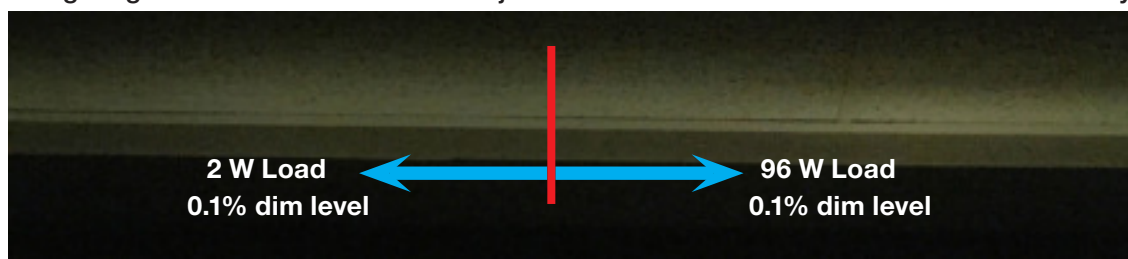

The Field Adjustment Knob cannot fix light level mismatch among loads on the same driver. For example, two homeruns of different wattage. For increasing the minimum light output of all the drivers in a space, please use the control's low-end trim feature. Using the Field Adjustment Knob for this purpose will degrade On/Off transition performance.

| | | |
|----------------------|----------------------|----------------------|
| Job Name: | Model Numbers: | |
| <input type="text"/> | <input type="text"/> | <input type="text"/> |
| Job Number: | <input type="text"/> | <input type="text"/> |

Facilities Manager

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

277 V~ NOTE: This equipment has been tested at 277 V~ and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

120 V~ NOTE: This equipment has been tested at 120 V~ and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Service

Driver Warranty


For warranty information, please visit www.lutron.com/driverwarranty

Replacement Parts

When ordering Lutron replacement parts, please provide the full model number. Consult Lutron if you have any questions.

Further Information

For further information, please visit us at www.lutron.com or contact our LED Control Center of Excellence at **1.877.346.5338** (U.S.A. and Canada only) or **LEDs@lutron.com**

 Lutron, Lutron, Hi-lume, GRAFIK Eye, PowPak, Quantum, HomeWorks, Pico, Nova T★, Nova, Skylark, Diva, Ariadni, Maestro, Maestro Wireless, RadioRA, and EcoSystem are trademarks of Lutron Electronics Co., Inc. registered in the U.S. and other countries.

Soft-on, Fade-to-Black, Energi Savr Node, and QwigFig are trademarks of Lutron Electronics Co., Inc.

ENERGY STAR is a registered trademark of the U.S. Environmental Protection Agency

| | | |
|--|---|----------------------|
| Job Name: <input type="text"/> | Model Numbers: <input type="text"/> | |
| Job Number: <input type="text"/> | <input type="text"/> | <input type="text"/> |

Hi-lume Premier 0.1% EcoSystem/3-Wire Voltage LED Driver Installation

English

041648 Rev. A
02/2018

L3D0-96W24V-U UL® Listed Driver

Output: 2–96 W 24 V \equiv Input: 120–277 V \sim 50/60 Hz, Max 110 W


Important Notes: Please read before installing.

- For installation by a qualified electrician in accordance with all local and national electrical codes.
- Use copper conductors only.
- For indoor use only.
- For 277 V \sim applications, a suitable barrier may be required between the non-Class 2 and Class 2 wiring, per local and national electrical wiring codes. For your convenience, the driver includes an optional barrier.
- Check to see that the driver type and rating are suitable for the application.
- DO NOT install if product has any visible damage.
- If moisture or condensation is evident, allow the product to dry completely before installation.
- Operate between 32 °F (0 °C) and 104 °F (40 °C) ambient.
- 0% to 90% humidity, non-condensing.
- Four 8-32 \times 3/8 in (9.5 mm), serrated lid screws provided.
- For best practices, please refer to Application Note #591 (P/N 048591) at www.lutron.com


Required Components

For each system, ensure that you have:


One Compatible
Lutron Control^{1,2}

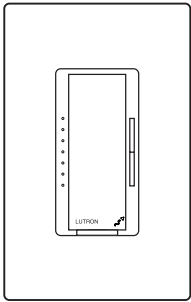

At least one Hi-lume
Premier 0.1% Driver

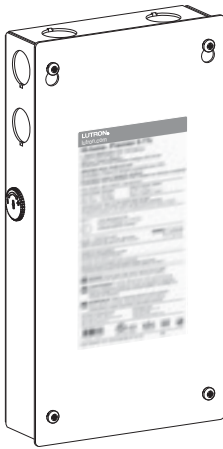

At least one compatible
LED Load (light engine)³

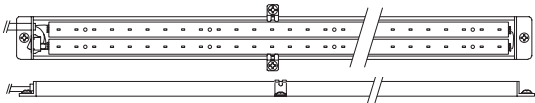

¹ See list of compatible controls on the reverse side.

² Please refer to the control installation sheet for wiring instructions.

³ Refer to LED load manufacturer instructions for proper installation practices. Load ratings must match driver output ratings.

Need Help? Please visit the Hi-lume Premier 0.1% page at www.lutron.com or call Lutron Customer Assistance at **1.844.LUTRON1 (1.844.588.7661)**

Mounting (mount as shown on the right)

- Remove top cover to access multi-sided mounting key holes.
- Mount driver per the options shown to the right.

Notes

- Minimum of 3 in (76 mm) required between any two LED drivers.
- Install in accordance with all national and local electrical codes.
- Mount driver in a position where it can be easily located and accessed if service or troubleshooting is necessary.
- Any other mounting configuration will require additional mechanical support. Improper installation may result in hazards to personnel or property.

Wiring (wire as shown below)




WARNING: Shock Hazard. May result in serious injury or death.

Turn off power at circuit breaker before installing the unit.


- Remove top cover to access the terminal blocks.
- Open necessary knockouts to pass wires into the wiring compartment.
- Connect the necessary wires according to the illustration below. For E1/E2 wiring, please refer to Application Note #142. Terminals accept 12 AWG to 20 AWG (0.50 mm² to 2.5 mm²).
- Optional** - An AC line cord may be used for a 120 V \sim application. The line cord must include a grounded plug to be a valid installation as shown to the right. 277 V \sim applications cannot use a line cord, they must be hard-wired.
- Optional** - Add barrier between non-Class 2 and Class 2 wires (e.g., EcoSystem wiring shown below has E1/E2 as Class 2, therefore barrier is placed between input and control terminal block).
- Rotate Field Adjustment Knob to full counter-clockwise position.
- Ensure compatible dimmer and load are installed and restore power to the circuit. See reverse side for Compatible Controls.

A barrier (included) in the wiring compartment separates non-Class 2 and Class 2 wires. Barrier can be placed between control and output terminals (Option 1) or between input and control terminals (Option 2).



Option 1

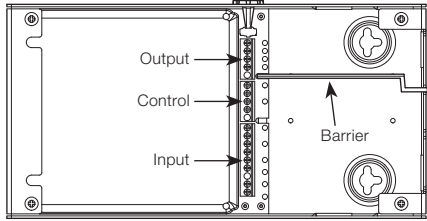


Option 2

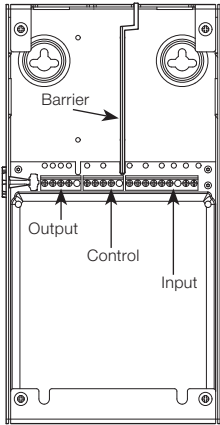


Option 3

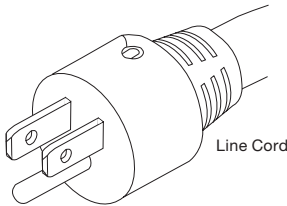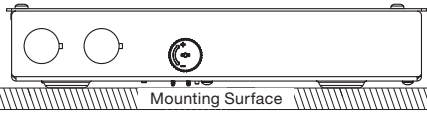


3-Wire Controls

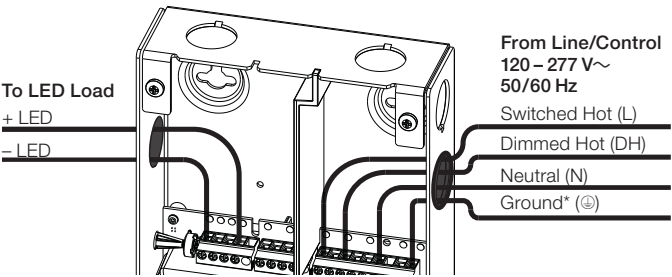


3-Wire Wiring Diagram

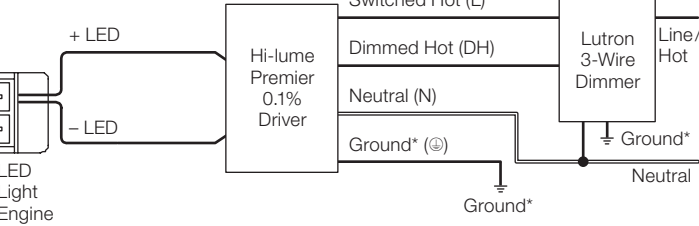

EcoSystem Controls

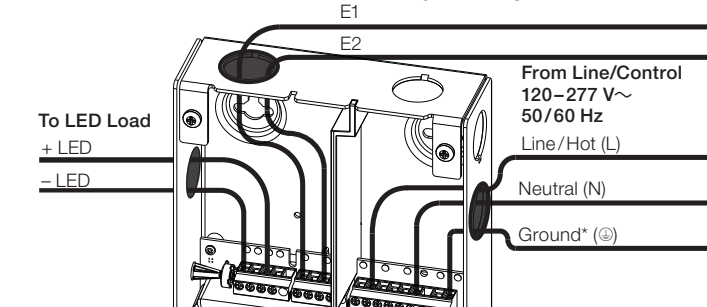

EcoSystem Wiring Diagram

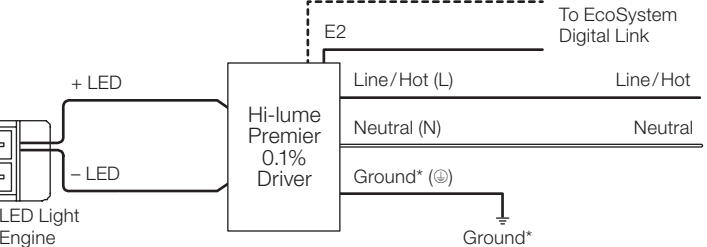

* Driver and control must be grounded in accordance with local and national electrical codes.



Hi-lume Premier 0.1% EcoSystem/3-wire Voltage LED Driver

Compatible Controls

Compatible Controls

- 3-Wire Controls
- EcoSystem Controls

Consult individual component installation guides for more details.

Driver Leads

Maximum wire length between LED driver and start of the light engine:

| Wire Gauge* | Maximum Lead Length |
|---------------------------------|---------------------|
| 24 AWG (0.20 mm ²)* | 6 ft (1.8 m) |
| 22 AWG (0.75 mm ²)* | 10 ft (3.0 m) |
| 20 AWG (0.50 mm ²) | 15 ft (4.5 m) |
| 18 AWG (0.75 mm ²) | 25 ft (7.62 m) |
| 16 AWG (1.0 mm ²) | 40 ft (12.2 m) |
| 14 AWG (1.5 mm ²) | 60 ft (18.3 m) |
| 12 AWG (2.5 mm ²) | 100 ft (30.5 m) |
| 10 AWG (4.0 mm ²)* | 150 ft (45.7 m) |

* To use wire gauges larger or smaller than terminal blocks' rated gauge of 20 AWG to 12 AWG (0.50 mm² to 2.50 mm²), connect 12 in (30 cm) or less of rated wire from terminal and connect with larger or smaller wire.

Field Adjustment Knob

Adjusting knob on the outside of the enclosure changes the minimum light level that is reached during normal operation. This feature enables the user to address light output mismatch between two or more drivers at low-end dim level. Driver is initially defaulted to the minimum light output when at low-end. For more information, please refer to Application Note #591 (P/N 048591) at www.lutron.com

1. Ensure knobs on all drivers are in the full counter-clockwise position.
2. Set control to get lowest light level.
3. Turn knob clockwise to adjust light output to match the brightest driver.
4. Repeat steps 2-3 for the remaining drivers.



Compatible Controls

For assistance in selecting controls, contact our LED Center of Excellence.

For a complete list of compatible controls, see www.lutron.com/hilumepremiervoltagecontrols

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference
- (2) This device must accept any interference received, including interference that may cause undesired operation.

277 V~ NOTE: This equipment has been tested at 277 V~ and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at their own expense.

120 V~ NOTE: This equipment has been tested at 120 V~ and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

L3D0-96W24V-U Troubleshooting

| Problem | Possible Solution |
|--|---|
| LED does not illuminate at high-end | <ul style="list-style-type: none">• Verify that the system is wired correctly according to wiring diagram and powered.• Verify that the LED load is wired correctly; +LED to positive, -LED to negative.• Verify that the LED load is for “constant-voltage” applications with PWM dimming.• Verify that the LED load is compatible with the specified voltage output of the driver.• Lutron drivers are not for use with MR16 LED lamps. |
| LED does not illuminate at low-end | <ul style="list-style-type: none">• Verify that the low-end trim on the control is set properly.• Turn Field Adjustment Knob clockwise until desired low-end operation is obtained. |
| LED does not dim | <ul style="list-style-type: none">• Verify that Switched Hot and Dimmed Hot are connected to the proper terminals for 3-wire control.• Verify EcoSystem control wiring (E1 and E2) is wired according to the instructions for digital control. |
| LED turns on/off abruptly without Soft-on, Fade-to-Black feature | <ul style="list-style-type: none">• Turn Field Adjustment Knob counter-clockwise until desired low-end operation is obtained.• 3-wire control does not have Soft-on, Fade-to-Black dimming technology. |
| LED is flashing, flickering, dropping out, or has poor dimming performance | <ul style="list-style-type: none">• Verify that a compatible dimmer is being used to control the driver.• Verify that the input voltage is within the rated limits.• Verify that Switched Hot and Dimmed Hot are connected to the proper terminals.• Verify that the LED load is for “constant-voltage” with PWM dimming applications.• Verify that the length of wires between driver and LED does not exceed specification.• Verify that the rated voltage is present at the driver.• Certain types of LED loads may be incompatible.* Verify that the LED load is within the specified wattage range of 2 W to 96 W.• Lutron drivers are not for use with MR16 LED lamps. |
| LED is flashing slowly (6 to 8 second interval) | <ul style="list-style-type: none">• Verify that the LED load does not exceed the maximum specified power rating of the driver (96 W).• Verify that the LED load matches the specified voltage output of the driver.• Verify that the length of wire between driver and LED does not exceed specification.• Certain types of LED loads may be incompatible.* |
| LED output appears dim at high-end | <ul style="list-style-type: none">• Verify that rated line voltage is present at the terminal.• Verify that the driver is operating in an environment within its ambient temperature rating.• Verify that the driver is not located adjacent to other heat producing devices. Verify that space between drivers is greater than 3 in (76 mm).• Verify that the maximum lead length is not exceeded per Lutron recommendation.• Verify that the LED load is installed per manufacturer's instructions.• Verify that the LED load is compatible with the specified voltage output of the driver. |
| Not all LED strips/fixtures illuminate | <ul style="list-style-type: none">• Verify that multiple LEDs connected to a single driver are properly wired.• Verify that the LED load is installed per manufacturer's instructions. |
| Not all LEDs on the same strip are evenly lit | <ul style="list-style-type: none">• Verify that the length of wire between the driver and LED does not exceed specifications.• Verify that the LED load is for “constant-voltage” with PWM dimming applications.• Verify that the LED load is installed per manufacturer's instructions. |
| LED is brighter/hotter than expected | <ul style="list-style-type: none">• Verify that the LED load is compatible with the specified voltage output of the driver. |

* Certain constant-voltage loads may have added capacitance. Contact the Lutron LED Center of Excellence at 1.877.346.5338 or LEDs@lutron.com for more information about these loads.

Warranty

For warranty information, please visit: www.lutron.com/DriverWarranty

⌚Lutron, Lutron, Hi-lume, and EcoSystem are trademarks of Lutron Electronics Co., Inc. registered in the U.S. and other countries.

©2015–2018 Lutron Electronics Co., Inc.