

Complete Downlight Range



whitegoods



whitegoods

Whitegoods has developed a complete range of Downlights which utilize the form factor of LED to reduce even further their visual impact, and of course they all hold true to our constant principles.

Our Philosophy

- Reduction of detail
- Seamless architectural integration
- Logical, modular systems and families of products
- Ease of specification, installation and maintenance

Downlights

Whitegoods offers a comprehensive range of downlights with functionality and performance characteristics to suit all applications and budgets.

Nonetheless, all our luminaires are designed and manufactured to the highest possible standards, incorporating many unique features and utilizing the best available materials and components. We are constantly seeking to deliver the best possible quality of light with our luminaires, so you can be sure that the light engines we select are as good as it gets: market leading performance across the range.

Made in the USA and in stock in Maryland.

ProTools 4"	30
ProTools 3"	110
GDL 2.4"	140



Introduction

Application Guide

Whitegoods products are extremely versatile and can be integrated in a multitude of ways. Within this section of the book, you will find examples of a range of luminaires used in varying applications, including examples of the detailing used to achieve them.

Product Details

Within this section, you will find detailed information for all Whitegoods products, including key features, selectable options, critical dimensions, mounting possibilities and aesthetic choices. The information you need to help select the perfect luminaire for your application, without the clutter of every last technical detail. But, we also know that ultimately you and your team will need all the technical details, so we have developed a unique way to access and share detailed product specifications. Have a look at the section below, which explains how it works. It's simple and quick.

Design Guide

We have provided performance data and characteristics for Whitegoods luminaires, as well as providing expected light levels and typical scenarios based on set parameters. The results are intended as a handy reference to help the specifier plan a project quickly, efficiently and with confidence.

The 4" ProTools downlight family offers trimless and trim, round or square, ambient light, adjustable and wall washers with ultimate performance, superb glare control, lens options and the Whitegoods attention to integration with surrounding materials.

- D
 - Shallow Ceiling Downlight
 - Open Downlight
 - Flush Lens Downlight
- DL
 - Full Range
 - Downlights
 - Wallwash
 - Adjustables
 - Wet Location
- DLX
 - Fully Featured
 - Adjustable Downlight




The 3" ProTools downlights family offers trimless and trim, round or square, ambient light, or adjustable, wall washers, ultimate performance, superb glare control, lens options and the Whitegoods attention to integration with surrounding materials.

- Downlight
- Wall Wash
- Adjustable
- Wet Location



The 2.4" General Downlights (GDL) family offers round flush, regressed and wall washers for indoor and outdoor applications with a bezel trim requiring very minimal ceiling depth while delivering low brightness illumination.

- Downlight
- Wall Wash
- Wet Location

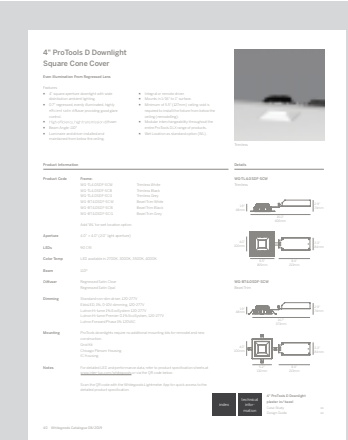

Accessing and Sharing Product Specifications

Whitegoods has developed a unique and innovative way to access and share product specifications, design guides and photometric files of the products you select.

Simply click the technical information button and you will be taken to the product page, where you can view and download technical information.

Made in the USA and in stock in Maryland.


ProTools Modularity

The ProTools range of professional lighting tools has been developed as a flexible and adaptable system.


One unified range can meet the demands of all spaces within a project, from the simplest requirements to the most demanding, all with a genuinely matching aesthetic appearance.

By designing interchangeability into the range, inventory can be efficiently controlled to minimize costs and lead times.


Frame

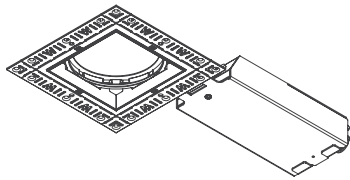


Square
Plaster Trim



Square
Bezel Trim



Round
Plaster Trim




Round
Bezel Trim

The Frame installs into the ceiling and accepts any Insert and Driver option. Available in round or square, the Frame will install seamlessly into drywall, ACT and hard ceilings. The Frames are stocked at the factory to meet delivery requirements.

Select from Plaster Trim or Bezel Once the mounting frame is fitted, it can accept any insert within the range, all of which can be installed and accessed from below.

The same is true for their driver box.


Insert



Wall Wash




Adjustable



Full Feature
Adjustable



Shallow
Downlight




Fixed
Downlight

The Insert is available in various light distributions, lumen output and color temperatures suited to the project.


All Inserts fit the selected Frame and are installed after the Frame is in place.

- Choose the insert to suit your needs:
- Simple ambient light from the D insert.
 - Various beam angles from fixed or adjustable.
 - Ultimate performance, superb glare control, lens options and a unique void shielding system with the DLX insert.


Cover




Wall Wash



Flush
Pinhole



Asymmetric
Adjustable



Cone



Flush
Lens



Cone

A variety of Covers fit the Inserts for optical control, light distribution options and glare control. The Covers are also stocked for timely delivery to the site when needed.

- Complete with your choice of cover:
- Flush Satin Opal
 - Recessed Cone
 - Wall Wash
 - Regressed Pinhole
 - Asymmetric
 - Wet Location



Aim Stick & Aim Stick Laser


"Hot aiming" has been a buzzword in the lighting industry for decades. However, these days, it is something of a misnomer, as luminaires with LED technology run much cooler than their predecessors. Moreover, the traditional requirement for "lockable" fixtures related to the fact that their carefully aimed position would inevitably be disturbed during re-lamping every few thousand hours. The locking mechanism was there to minimize this. As LEDs will now more than likely outlast the serviceable life of an installation, this requirement is redundant. Market leading COB LEDs mean that, once set, the luminaire is unlikely to need servicing.

Instead, we have ensured that the position of our adjustable downlights is "fixed as set" by default. The 365 degree rotation is incrementally defined by a spring-loaded ratchet system, ensuring that the position achieved is fixed the moment it is set. The aiming angle is likewise held fast by four, factory torque set, friction points.


Whitegoods products are designed with input from lighting designers who have years of real life, first hand experience of specifying and using luminaires of all kinds. We know that construction sites can be difficult places to work. Focusing a project when the BMS or lighting control system is also being commissioned can mean wasted hours waiting for the lights to come on. With ProTools the designer can focus the project with lights on or off, utilizing the unique aiming stick with laser sight, allowing total confidence that the luminaire will hit its target.

If you don't have one on hand, don't worry. A long thin screwdriver can be used to do the same job, albeit without the laser aiming of course.


Available on ProTools 3" and 4"

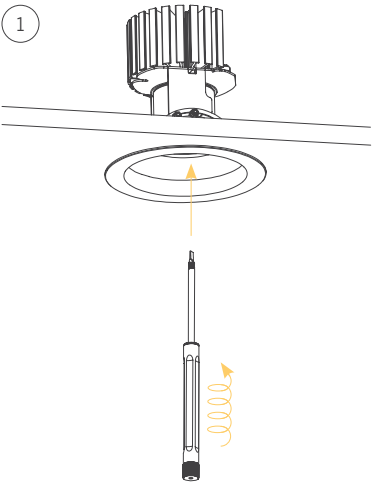


Locate the designated hole for the tool. Insert the ProTools Aim Stick into the housing and screw in a few short twists.

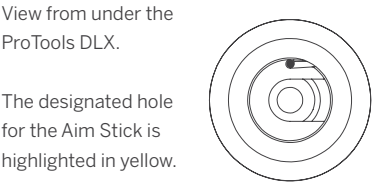

The designated hole for the Aim Stick is highlighted in yellow.

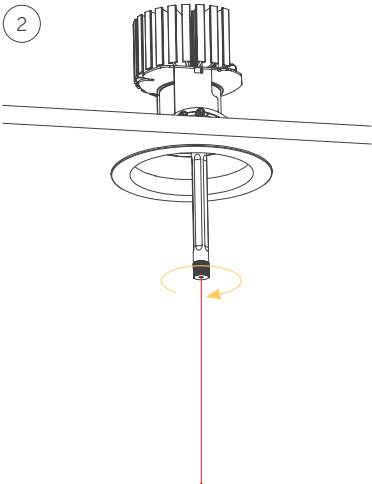

Activate the laser by rotating the black dial on the bottom of the Aim Stick clockwise.

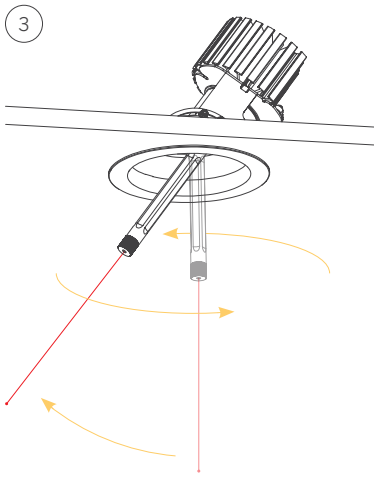

Use the tool to rotate the direction of the beam to the desired point. The ProTools DLX can rotate 365° and has a tilt of 45°, the ProTools DL Adjustable can rotate 365° and has a tilt of 40°.


Once the required adjustment has been made, repeat steps 3-6 in reverse.

Aiming Geometry

ProTools Adjustable Downlights are designed with perfect aiming geometry. An innovative geometry ensures that the center of the beam passes through the center of the aperture, without the need for complicated gear driven mechanisms, just smart design.

PTD4"
40 degree tilt
365 degree rotation

PTD3"
25 degree tilt
365 degree rotation

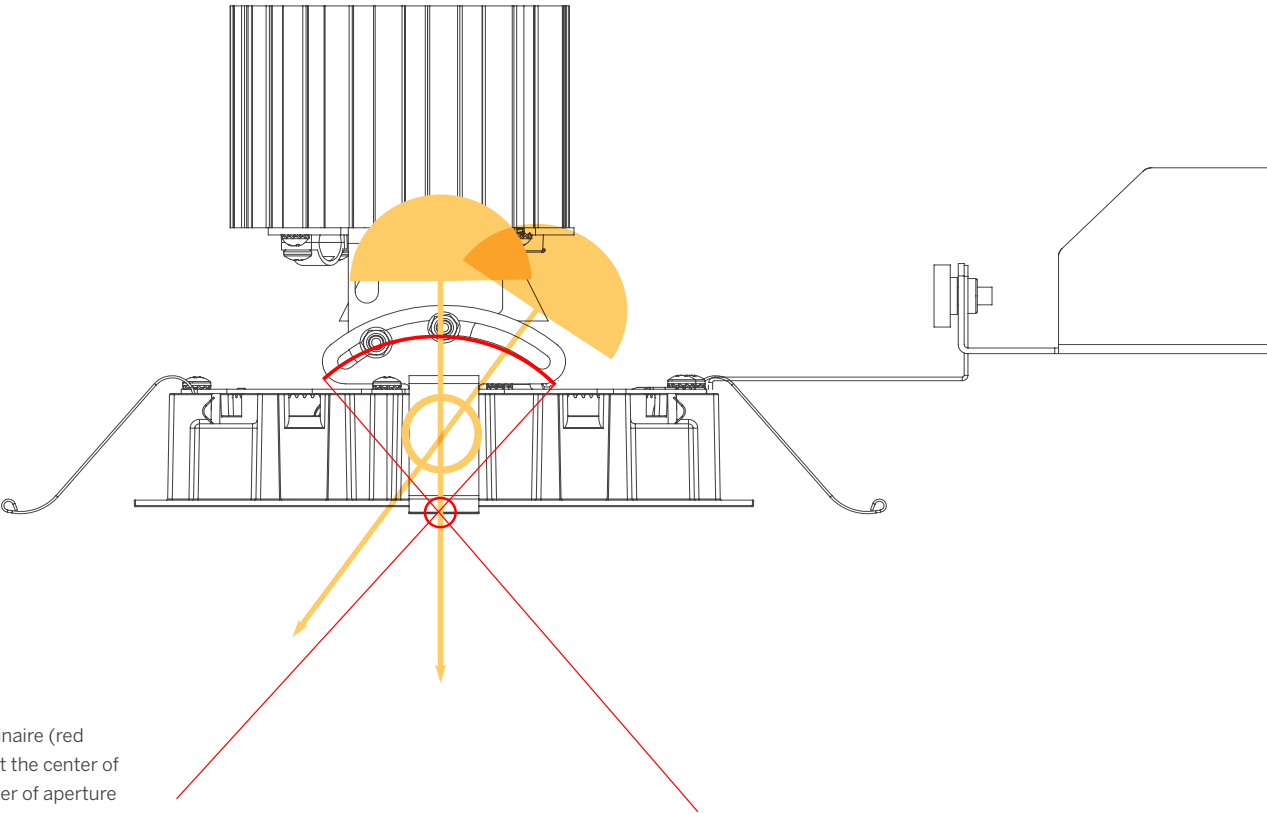


The focus of tilt is outside the luminaire (red reference lines), thus ensuring that the center of the beam passes through the center of aperture (green reference lines), regardless of the angle of illumination selected.



LED Technology

ProTools Downlights are designed with a flexible led platform so that the light engine can be easily installed, field exchanged and updated as new technology evolves. ProTools Downlights utilize world-class COB led devices that deliver consistent performance and the highest quality of light available in a configuration that will work effectively with today's optical systems.

- 600-2000 lumen output range.
- 92 CRI as standard with 98CRI as an option.
- 3 step MacAdam binning.
- Paired with highest quality drivers that deliver flicker-free, full-range dimming.
- Four standard color temperatures from 2700K-4000K.
- Warm-Dim available to emulate incandescent while dimming.
- Tunable White technology allows the occupant to dial in the color temperature.
- Compatible with all common dimmer and control standards such as 0-10V, 3-wire, forward-phase with neutral, ELV, DALI and DMX.
- Wireless control capability using Casambi components.
- High efficiency design delivers a range of excellent performance characteristics, with output available exceeding 140 lumens per watt.
- Used throughout Whitegoods Downlights for consistent color and performance throughout the range.
- 5-year warranty.
- Made in the USA, Stocked in Maryland.

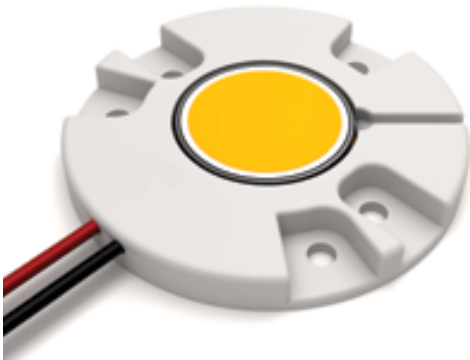

Tunable White

ProTools DL and DLX are available in Tunable White to allow you to select any color temperature between 1800K and 4000K, while maintaining the same high quality color rendering as the standard led. This feature is often used in health and wellness applications, as well as work spaces to increase productivity, architectural spaces to match natural light, and for design focus in retail and hospitality environments.

Available on ProTools 3" and 4"

Color Temperature	Description	Typical Usage
4000K	Cool	Office, Exterior
3500K	Neutral Cool	Office
3000K	Neutral Warm	Office, Residential
2700K	Warm: Halogen Incandescent	Residential, Hotel
1800K	Very Warm Incandescent	Residential



Warm Dim

Whitegoods Warm Dim lighting provides LED dimming and warm LED lights virtually indistinguishable from an incandescent light source. Designed to precisely mimic the black body curve of a standard 100W A19 lamp by gradually transitioning from 1800K to 3000K.

Available on ProTools 3" and 4"

Color Temperature	Description	Typical Usage
3000K	Neutral Warm	Office, Residential
2700K	Warm: Halogen Incandescent	Residential, Hotel
1800K	Very Warm Incandescent	Residential



Multiple Luminaire Configurations

Multiple fixture configurations can be accomplished using standard plaster-trim Downlight Frames.


With ProTools 3" and 4" Downlights you never have to purchase a specialized housing in order to realize a multiple configuration. In fact, you can simply snap off segments of the plaster-trim on standard product and field join the Frames during installation.

You simply specify the standard product.


- 1 Select which side of the plaster trim to remove.




- 2 Use a pair of multi-grip pliers and firmly snap off the trim with one swift movement.




- 3 Installation frames can now be fixed directly next to one another...




- 4 ...to create "multiple" configurations, which would usually require additional dedicated housings.



- 5 Any number of frames can be grouped together to form linear configurations.

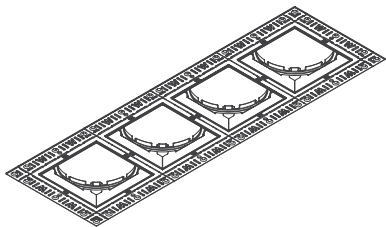

- 6 There are really no limits to the ways in which the installation frames can be combined.

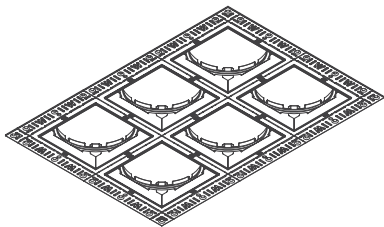




Future Proofing

The ProTools Downlight range is designed to allow complete flexibility of application, today, next month, next year, and beyond.

The modular design means that any combination of insert and cover can be fitted into the mounting frame, and at any time. For example, imagine an installation called for Wall Wash inserts and covers initially, but some years on the customer has a different requirement – adjustable downlights are now needed. No problem! Simply follow these few simple steps and the installation can be completely re-purposed, quickly and easily.




4" ProTools DL Wall Wash
Round Wall Wash Cover




4" ProTools DL Adjustable
Round Regressed Cone Cover


- 1 Insert the edge of the Aim Stick into the gap between the housing and the cover.

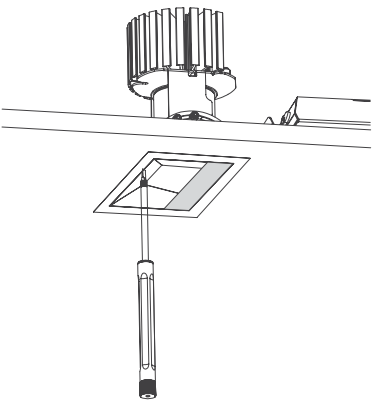


- 2 Lever out the cover.

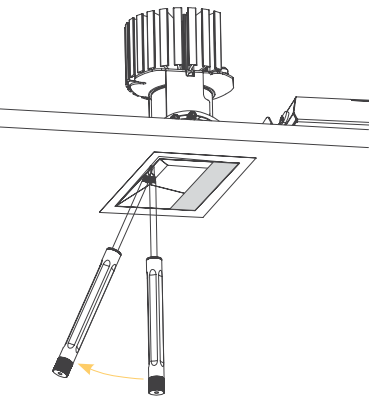


- 3 Remove the cover.

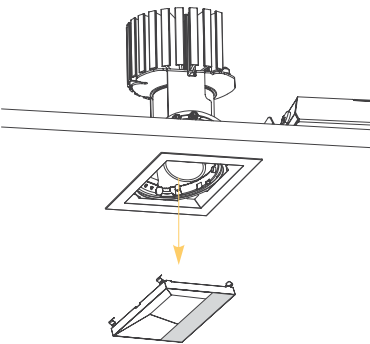


- 4 Remove Wall Wash insert and disconnect in-line connector (tool free) from driver / junction box.

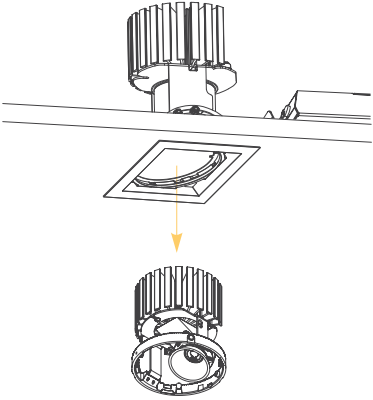

- 5 Connect replacement insert via inline connector (tool free) to driver / junction box, then snap into the housing.

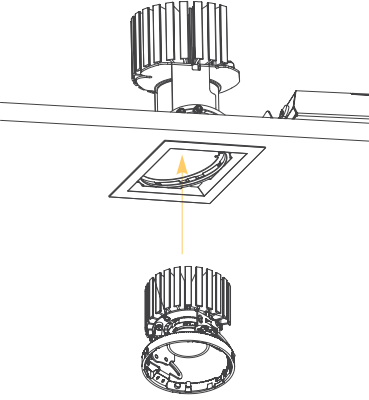




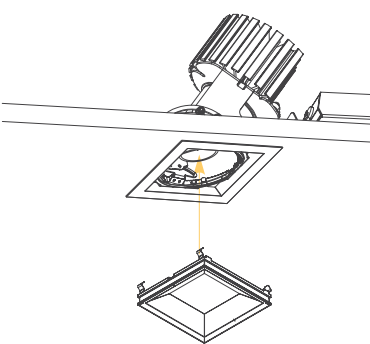


- 6 Fit new / preferred cover by simply snapping it home into the housing trim.

















Complete Downlight Range

4" ProTools D
shallow











	4" ProTools D Downlight Square Flush Diffuser Product details Design guide	38 154-161
	4" ProTools D Downlight Round Flush Diffuser Product details Design guide	40 154-161
	4" ProTools D Downlight Square Recessed Cone Product details	42
	4" ProTools D Downlight Round Recessed Cone Product details	44
	4" ProTools D Downlight Square Regressed Pinhole Product details	46
	4" ProTools D Downlight Round Regressed Pinhole Product details	48

4" ProTools DL
full family









	4" ProTools DL Downlight Square Recessed Cone Product details Design guide	50 154-161
	4" ProTools DL Downlight Round Recessed Cone Product details Design guide	52 154-161
	4" ProTools DL Downlight Square Regressed Pinhole Product details Design guide	54 154-161
	4" ProTools DL Downlight Round Regressed Pinhole Product details Design guide	56 154-161
	4" ProTools DL Adjustable Square Recessed Cone Product details Design guide	58 154-161
	4" ProTools DL Adjustable Round Recessed Cone Product details Design guide	60 154-161
	4" ProTools DL Adjustable Square Regressed Pinhole Product details Design guide	62 154-161
	4" ProTools DL Adjustable Round Regressed Pinhole Product details Design guide	64 154-161

	4" ProTools DL Adjustable Square Asymmetric Cone Product details Design guide	66 154-161
	4" ProTools DL Adjustable Round Asymmetric Cone Product details Design guide	68 154-161
	4" ProTools DL Wall Wash Square Wall Wash Product details Design guide	70 162-165
	4" ProTools DL Wall Wash Round Wall Wash Product details Design guide	72 162-165











4" ProTools DLX
full feature adjustable

	4" ProTools DLX Adjustable Square Recessed Cone Product details Design guide	74 154-161
	4" ProTools DLX Adjustable Square Recessed Cone - Narrow Product details Design guide	76 154-161
	4" ProTools DLX Adjustable Square Recessed Cone - Zoom Product details Design guide	78 154-161
	4" ProTools DLX Adjustable Round Recessed Cone Product details Design guide	80 154-161
	4" ProTools DLX Adjustable Round Recessed Cone - Narrow Product details Design guide	82 154-161
	4" ProTools DLX Adjustable Round Recessed Cone - Zoom Product details Design guide	84 154-161
	4" ProTools DLX Adjustable Square Regressed Pinhole Product details Design guide	86 154-161
	4" ProTools DLX Adjustable Square Regressed Pinhole - Narrow Product details Design guide	88 154-161
	4" ProTools DLX Adjustable Square Regressed Pinhole - Zoom Product details Design guide	90 154-161
	4" ProTools DLX Adjustable Round Regressed Pinhole Product details Design guide	92 154-161




4" ProTools DLX
full feature adjustable

	4" ProTools DLX Adjustable Round Regressed Pinhole - Narrow Product details Design guide	94 154-161
	4" ProTools DLX Adjustable Round Regressed Pinhole - Zoom Product details Design guide	96 154-161
	4" ProTools DLX Adjustable Square Asymmetric Cone Product details Design guide	98 154-161
	4" ProTools DLX Adjustable Square Asymmetric Cone - Narrow Product details Design guide	100 154-161
	4" ProTools DLX Adjustable Square Asymmetric Cone - Zoom Product details Design guide	102 154-161
	4" ProTools DLX Adjustable Round Asymmetric Cone Product details Design guide	104 154-161
	4" ProTools DLX Adjustable Round Asymmetric Cone - Narrow Product details Design guide	106 154-161
	4" ProTools DLX Adjustable Round Asymmetric Cone - Zoom Product details Design guide	108 154-161

3" ProTools

	3" ProTools Downlight Square Recessed Cone Product details	120
	3" ProTools Downlight Round Recessed Cone Product details	122
	3" ProTools Downlight Square Regressed Lens Product details	124
	3" ProTools Downlight Round Regressed Lens Product details	126
	3" ProTools Wall Wash Square Recessed Product details	128
	3" ProTools Wall Wash Round Recessed Product details	130
	3" ProTools Adjustable Square Recessed Product details	132
	3" ProTools Adjustable Round Recessed Product details	134
	3" ProTools Accent Wall Wash Square Recessed Product details	136
	3" ProTools Accent Wall Wash Round Recessed Product details	140

2.4" General Downlights

	2.4" General Downlight Round Flush Diffuser Product details Design guide	146 166-169
	2.4" General Downlight Round Regressed Cone Product details Design guide	148 168-173
	2.4" General Downlight Wall Wash Product details	150

Application Guide

Whitegoods products are extremely versatile and can be integrated in a multitude of ways. Within this section of the book, you will find examples of a range of luminaires used in varying applications, including examples of the detailing used to achieve them.

In the following pages, you can find out how Whitegoods products have been used to create continuous apertures in the ceiling with no apparent edge (or upstand) visible from below, how they can be used to transition from a wood paneled wall into a gypsum ceiling, or create layers of geometric patterns which overlap, light flowing from between the layers.


In short, Whitegoods luminaires and integration options allow the designer free reign when it comes to imagining innovative and fresh ways to breath light into a space.

You bring the vision to us, and we help you realize it.



Downlight Applications

Downlight

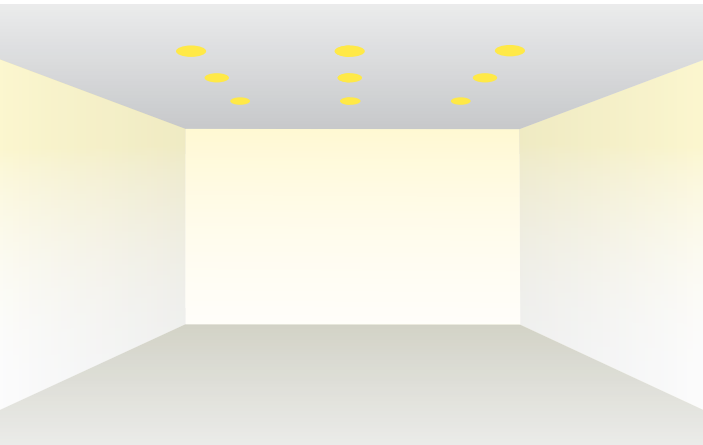


Perhaps the most common lighting solution utilized for general area lighting, arranging a group of lights in a grid to give even illumination to the surface below.

Of course, the popularity of a technique is not always a sign of best practice, and in this case it typically has more to do with economy and ease of implementation.

However, when applied to a space with some consideration it can be an effective technique. One thing to consider for this type of solution is "how much light will fall on the walls?". A space can have a lot of light being delivered into it, but if the walls are not sufficiently illuminated, there is a good chance that the space will feel gloomy, even though there is plenty of light falling on horizontal surfaces like desks or the floor.

Fortunately, many Whitegoods luminaires have good 'high angle distribution', which can help to deal with this common issue.


Washlight

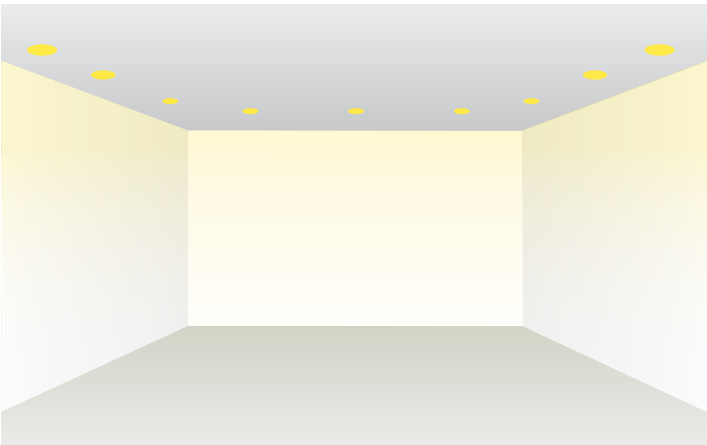

The aim of wall washing, or in fact washing any surface with light (wall, ceiling or floor), is to create an even 'wash' of light across the surface. The wall wash is a great way to introduce light into a room as the brightness of the vertical surfaces around us play a crucial role in our perception of a space. You can use linear or point sources, and both will need to emit a wide, even beam of light which is directed towards the wall, to create the effect.

Downlights need to be correctly positioned, both in terms of distance from the wall, and their relative distance to one another. There are helpful guides for this in the Design Guide section of this book. Linear sources also need careful placing in terms of their offset from the wall, and can be used in a continuous format, or as a series of linear elements. A continuous linear source will achieve the most consistent overall effect, although downlights might better suit the architecture or construction method.


Adjustable

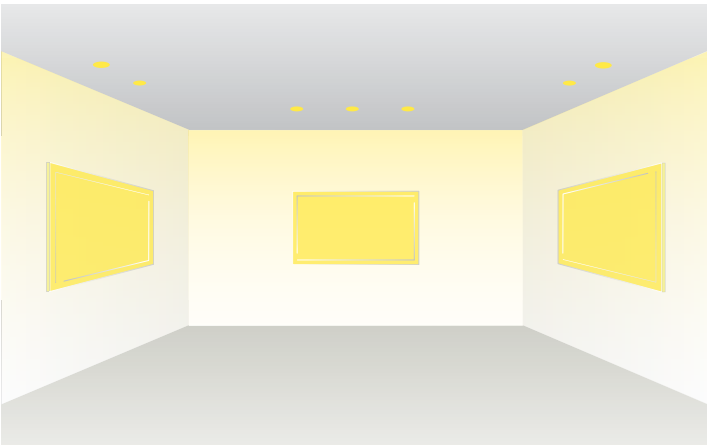

Of course, although considering whole surfaces is a highly effective way to start thinking about light within your project, it is equally possible to think in terms of specific pieces of architecture, art, sculpture, ornamentation or furniture, and treat these as focal objects, drawing the viewers attention to them naturally and simply by highlighting them against their background scenario.

A useful 'rule of thumb' here is that if you allow ten times more light to fall on an object relative to the surrounding light level, it will seem to be 'popping' out of the scene and will tend to draw the eye.

Multiple Luminair Configurations / Wet Location

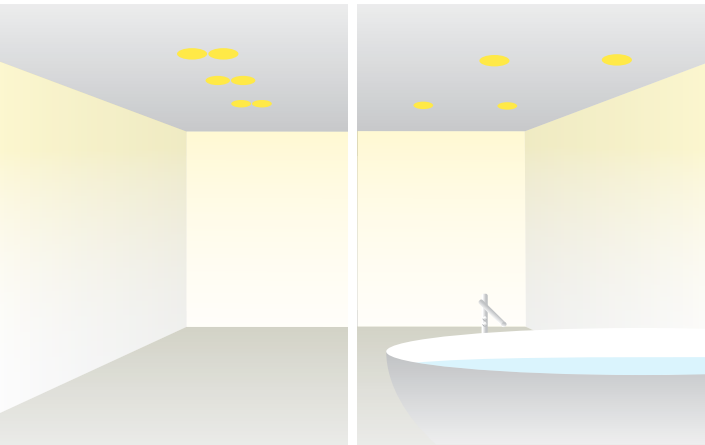

Multiple Lumiair Configurations

Multiple Fixture Configurations can be accomplished using standard plastertrim downlight Frames.

With Protools 3" and 4" Downlights you never have to purchase a specialized housing in order to realize a multiple configuration. In fact, you can simply snap off segments of the plaster-trim on standard product and field join the Frames during installation.

Wet Location

Most Whitegoods downlights are available in wet location for use outdoors as well as in showers and other applications where they may be exposed to moisture. Specialized silicon seal rings protect against moisture ingress, and are impervious to degradation caused by UV. See the specific product data sheet for availability on the specific model.

4" ProTools Downlights


The **4" ProTools** downlight family offers trimless and trim, round or square, ambient light, or adjustable, wall washers, ultimate performance, superb glare control, lens options and the Whitegoods attention to integration with surrounding materials.

D	<ul style="list-style-type: none">- Shallow Ceiling Downlight- Open Downlight- Flush Lens Downlight	DL	<ul style="list-style-type: none">- Full Range- Downlight- Wallwash- Adjustable- Wet Location	DLX	<ul style="list-style-type: none">- Fully Featured- Adjustable Downlight	Application guide	28-29
						Product details	38-109
						Design guide	154-165




4" ProTools Range Logic

The ProTools range allows the specifier freedom to design for all spaces and environments within a project from one succinct, logical and aesthetically congruent range of luminaires. The comprehensive options cover all of the designer's needs.

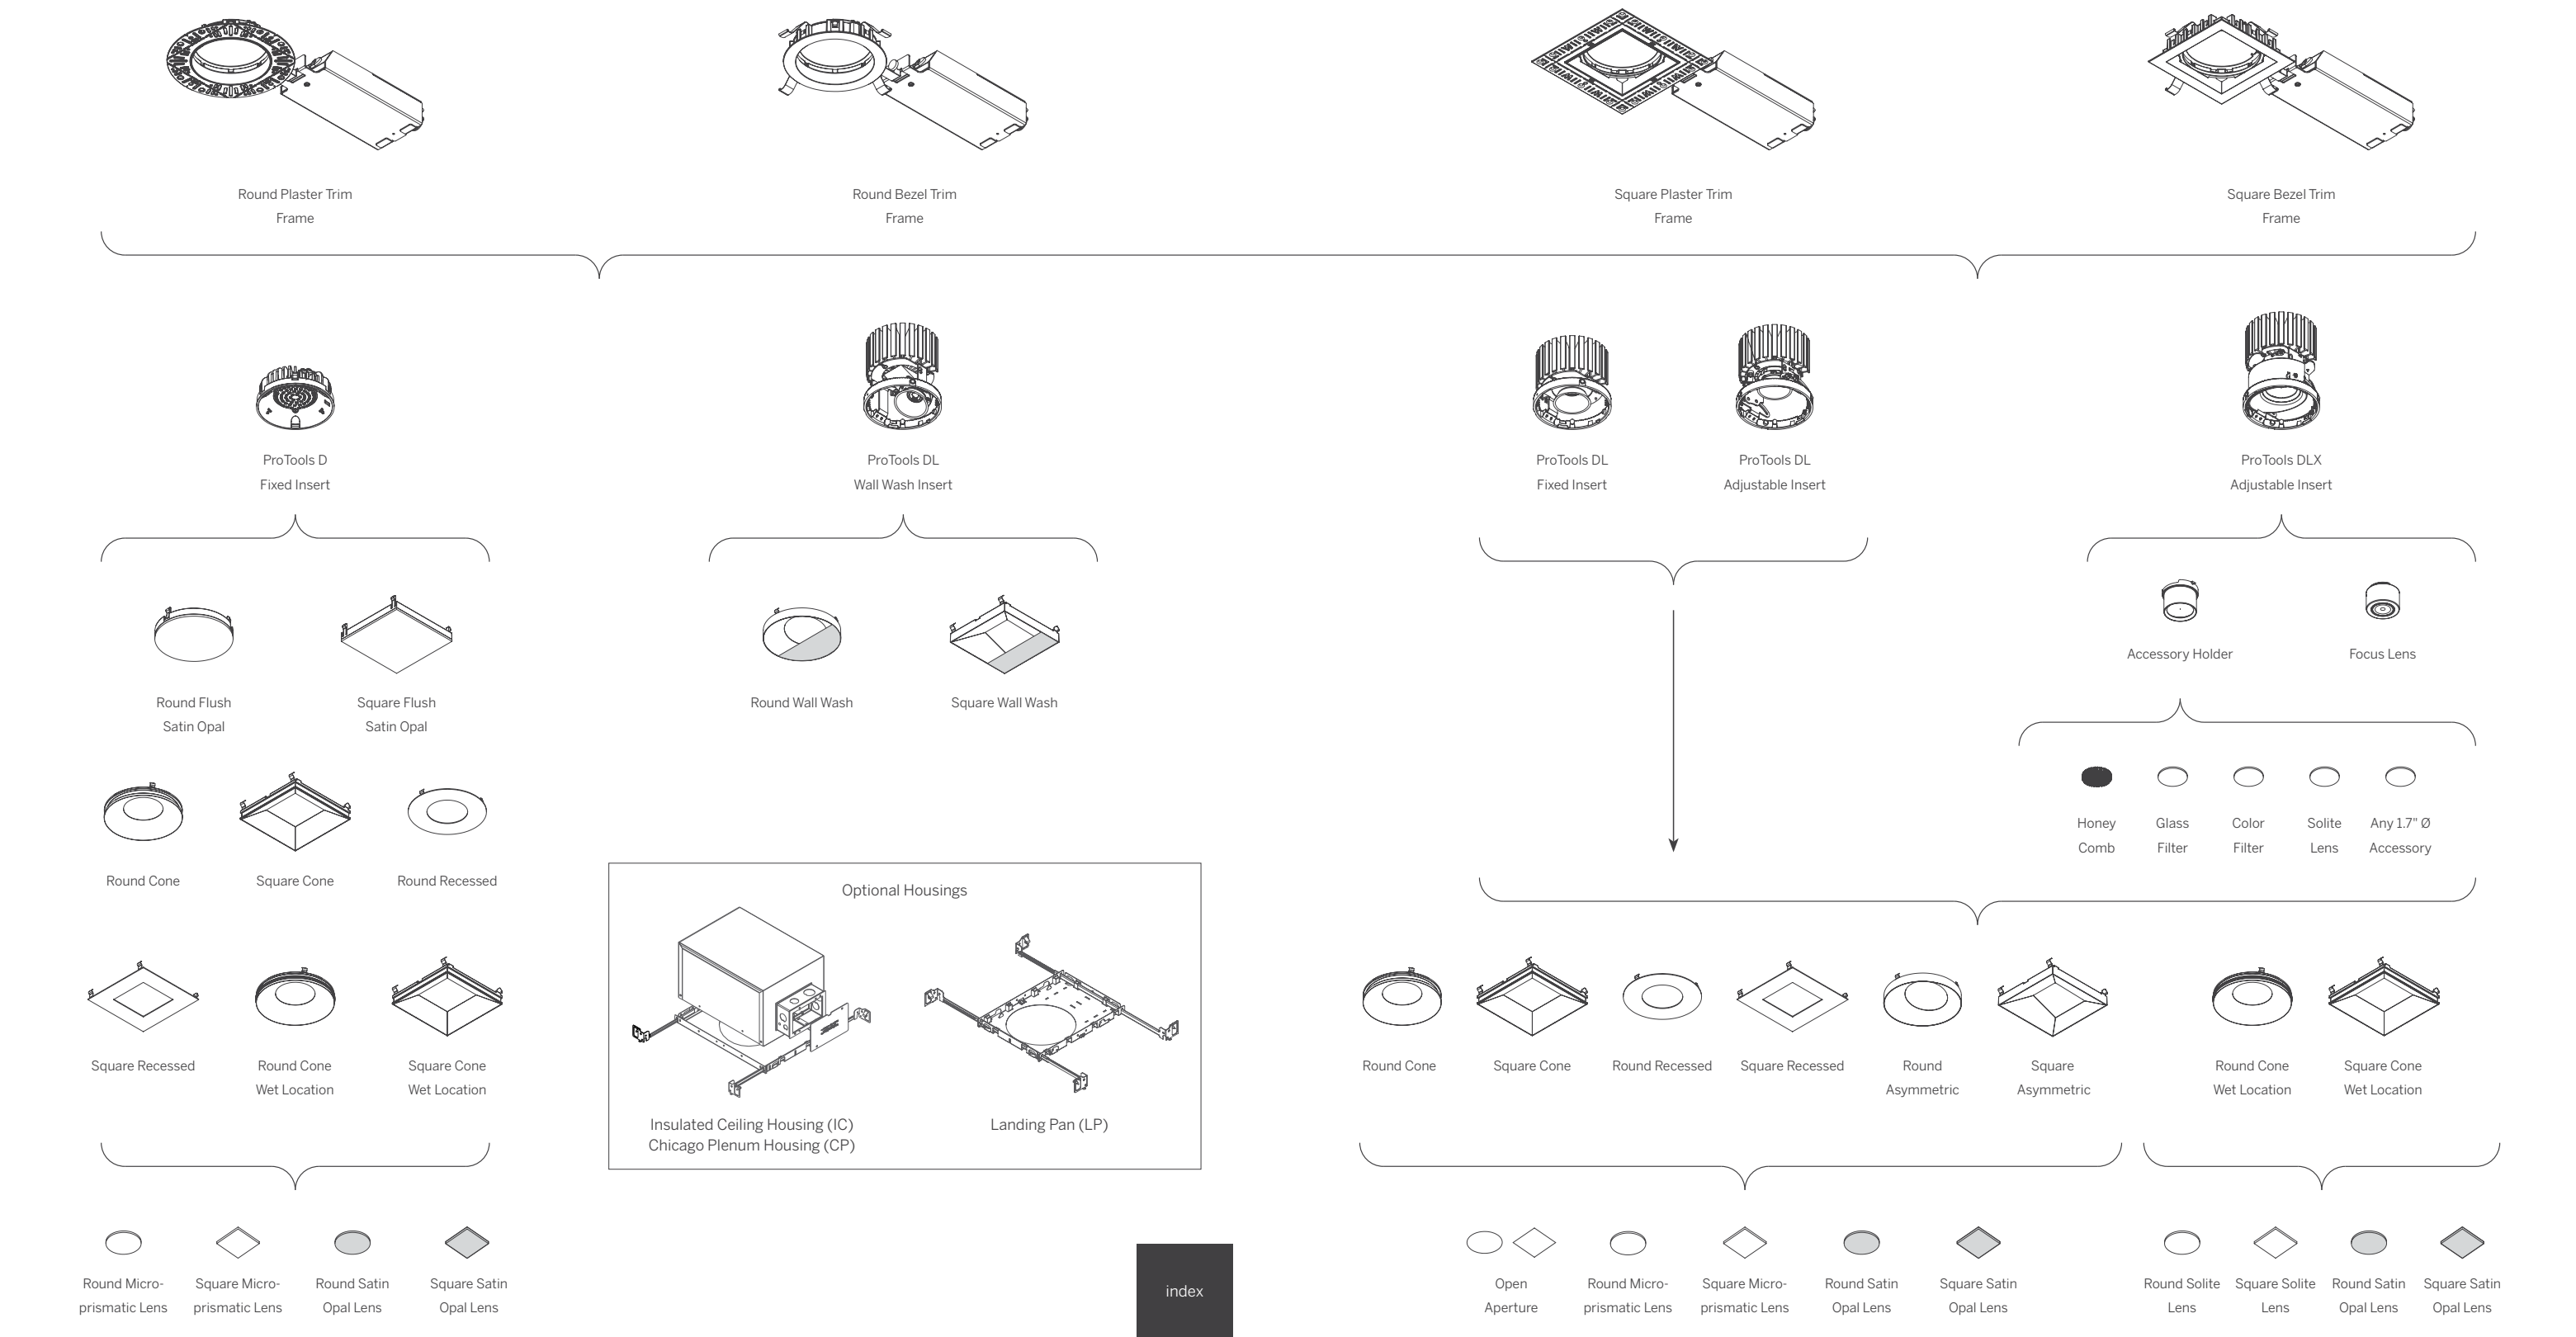


index


4" ProTools ease of Installation




Cut a hole in the ceiling and clear insulation. Insert Frame into ceiling and secure with at least 4 drywall Screws.




Install using 'tape-and-joint' method, or plaster finish. Clean excess plaster while still wet.




Pull power cable and control cable through the ceiling opening and make connections.



Push the Driver Box through the Housing. Insert the tab from the Driver into one of the slots located on the Housing.

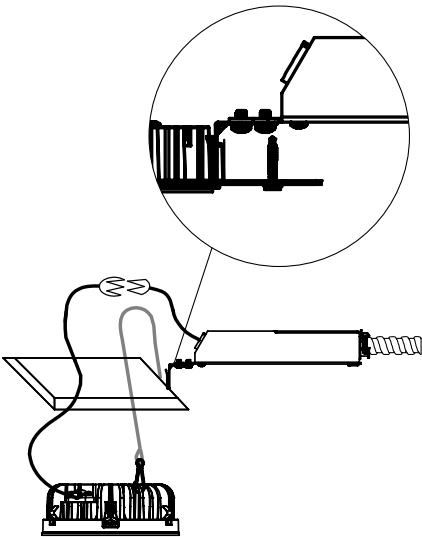

Attach the Safety Cable and make the electrical connection between the Driver and the Light Engine.

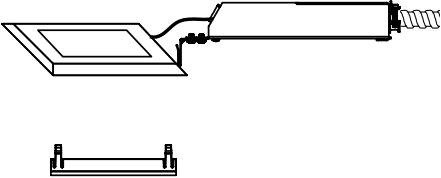



Push the Diffuser into Light Engine locking it into place.

4" ProTools Multiple Luminaire Configurations




Multiple fixture configurations can be accomplished using standard plaster-trim Downlight Frames.

With ProTools 4" Downlights you never have to purchase a specialized housing in order to realize a multiple configuration. In fact, you can simply snap off segments of the plaster-trim on standard product and field join the Frames during installation.




You simply specify the standard product.

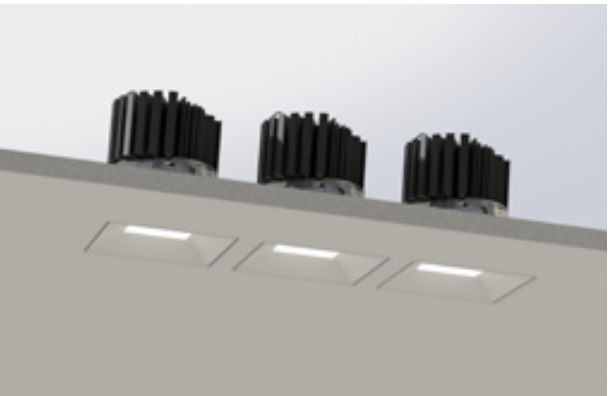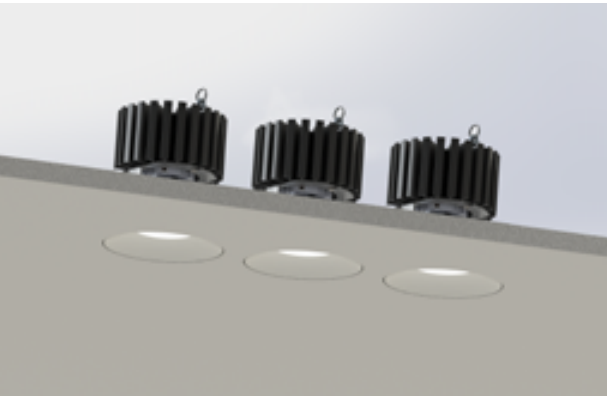

- 1 Select which side of the plaster trim to remove.
- 2 Use a pair of multi-grip pliers and firmly snap off the trim with one swift movement.
- 3 Installation frames can now be fixed directly next to one another...





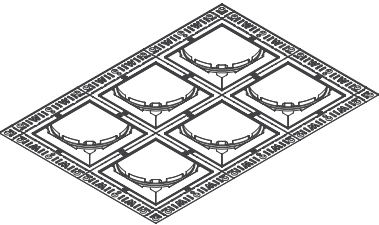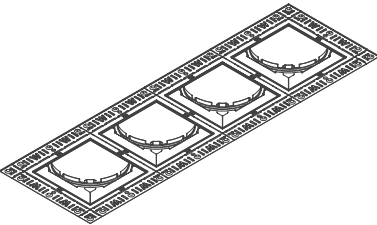







- 4 ...to create "multiple" configurations, which would usually require additional dedicated housings.
- 5 Any number of frames can be grouped together to form linear configurations.
- 6 There are really no limits to the ways in which the installation frames can be combined.























4" ProTools Downlights





Fixed Downlights

	4" ProTools D Downlight Square Flush Diffuser Product details Design guide	38 154-161
	4" ProTools D Downlight Round Flush Diffuser Product details Design guide	40 154-161
	4" ProTools D Downlight Square Recessed Cone Product details	42
	4" ProTools D Downlight Round Recessed Cone Product details	44
	4" ProTools D Downlight Square Regressed Pinhole Product details	46
	4" ProTools D Downlight Round Regressed Pinhole Product details	48
	4" ProTools DL Downlight Square Recessed Cone Product details Design guide	50 154-161
	4" ProTools DL Downlight Round Recessed Cone Product details Design guide	52 154-161
	4" ProTools DL Downlight Square Regressed Pinhole Product details Design guide	54 154-161
	4" ProTools DL Downlight Round Regressed Pinhole Product details Design guide	56 154-161



Adjustable Downlights

	4" ProTools DL Adjustable Square Recessed Cone Product details Design guide	58 154-161
	4" ProTools DL Adjustable Round Recessed Cone Product details Design guide	60 154-161
	4" ProTools DL Adjustable Square Regressed Pinhole Product details Design guide	62 154-161
	4" ProTools DL Adjustable Round Regressed Pinhole Product details Design guide	64 154-161
	4" ProTools DL Adjustable Square Asymmetric Cone Product details Design guide	66 154-161
	4" ProTools DL Adjustable Round Asymmetric Cone Product details Design guide	68 154-161
	4" ProTools DLX Adjustable Square Recessed Cone Product details Design guide	74 154-161
	4" ProTools DLX Adjustable Square Recessed Cone - Narrow Product details Design guide	76 154-161
	4" ProTools DLX Adjustable Square Recessed Cone - Zoom Product details Design guide	78 154-161
	4" ProTools DLX Adjustable Round Recessed Cone Product details Design guide	80 154-161

	4" ProTools DLX Adjustable Round Recessed Cone - Narrow Product details Design guide	82 154-161
	4" ProTools DLX Adjustable Round Recessed Cone - Zoom Product details Design guide	84 154-161
	4" ProTools DLX Adjustable Square Regressed Pinhole Product details Design guide	86 154-161
	4" ProTools DLX Adjustable Square Regressed Pinhole - Narrow Product details Design guide	88 154-161
	4" ProTools DLX Adjustable Square Regressed Pinhole - Zoom Product details Design guide	90 154-161
	4" ProTools DLX Adjustable Round Regressed Pinhole Product details Design guide	92 154-161
	4" ProTools DLX Adjustable Round Regressed Pinhole - Narrow Product details Design guide	94 154-161
	4" ProTools DLX Adjustable Round Regressed Pinhole - Zoom Product details Design guide	96 154-161
	4" ProTools DLX Adjustable Square Asymmetric Cone Product details Design guide	98 154-161
	4" ProTools DLX Adjustable Square Asymmetric Cone - Narrow Product details Design guide	100 154-161

	4" ProTools DLX Adjustable Square Asymmetric Cone - Zoom Product details Design guide	102 154-161
	4" ProTools DLX Adjustable Round Asymmetric Cone Product details Design guide	104 154-161
	4" ProTools DLX Adjustable Round Asymmetric Cone - Narrow Product details Design guide	106 154-161
	4" ProTools DLX Adjustable Round Asymmetric Cone - Zoom Product details Design guide	108 154-161

Washlights

	4" ProTools DL Wall Wash Square Wall Wash Product details Design guide	70 162-165
	4" ProTools DL Wall Wash Round Wall Wash Product details Design guide	72 162-165


4" ProTools D Downlight

Square Flush Diffuser

High-Angle Distribution Ambient Lighting

- 4" aperture square downlight for wide distribution ambient lighting.
 - High angle distribution giving good vertical illumination.
 - High transmission, evenly illuminated Flush Satin Diffuser.
- Beam Angle: Lambertian
 - Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Modular interchangeability throughout the entire ProTools range of products.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square aperture with minimal ceiling interruption and flush lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	Lambertian
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

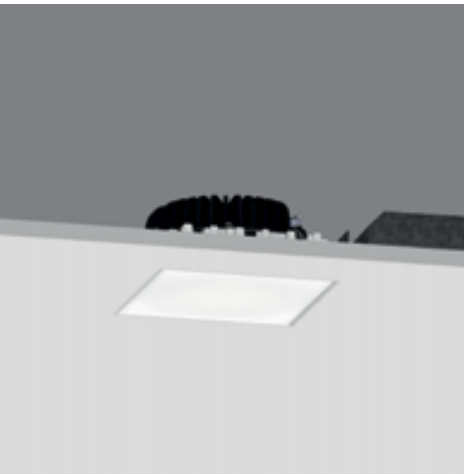

Recessed Plaster Trim



Recessed Bezel Trim

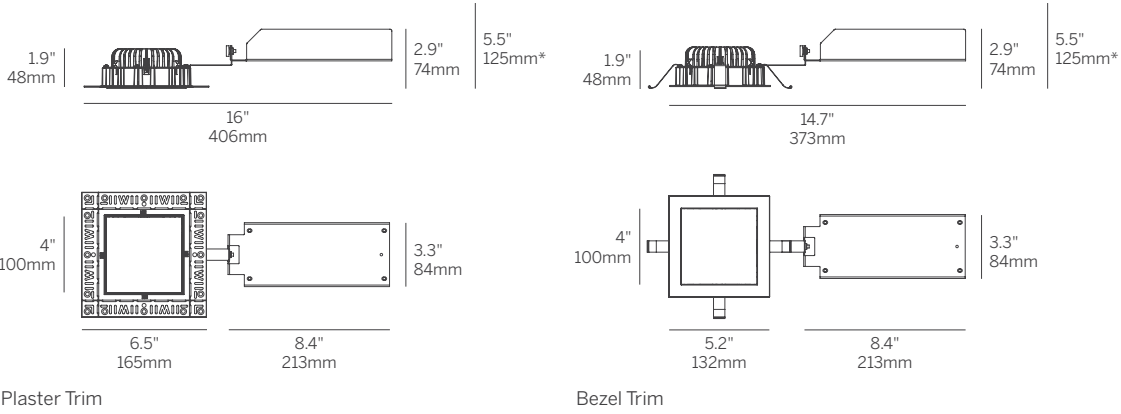

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools D Downlight

Square Flush Diffuser

Model	Fixation	Power ^{1,2}	CRI/CCT ³	Driver ⁴	Lens	Beam	Finish ⁵	Options
WG-100SPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ0 DFPN	FSOD	LAM	W S ⁶	LP CP IC

- Model**

 - WG-100SPTD = 4" ProTools D Downlight
- Fixation**

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**

 - L = Low Power, 11W @ 350mA
 - M = Mid Power, 15W @ 500mA
 - H = High Power, 22.5W @ 700mA
- CRI/CCT³**

90+ CRI (Low/Mid/High Power)

 - 927 = 2700K, (850/1187/1612 lm)
 - 930 = 3000K, (875/1220/1657 lm)
 - 935 = 3500K, (922/1286/1747 lm)
 - 940 = 4000K, (972/1356/1842 lm)
- Driver⁴**

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)
 - DFPN = Lutron Forward Phase 1% 120VAC
- Lens**

 - FSOD = Flush Square Satin Opal Lens
- Beam**

 - LAM = Lambertian
- Finish⁵**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁶
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumens shown for WG-100SPTD-...-FSOD-LAM-W. See Page 2 of specsheet for additional details.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.



4" ProTools D Downlight

Round Flush Diffuser

High-Angle Distribution Ambient Lighting

- 4" aperture square downlight for wide distribution ambient lighting.
 - High angle distribution giving good vertical illumination.
 - High transmission, evenly illuminated Flush Satin Diffuser.
- Beam Angle: Lambertian
 - Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Modular interchangeability throughout the entire ProTools range of products.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round aperture with minimal ceiling interruption and flush lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	Lambertian
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE



Recessed Plaster Trim



Recessed Bezel Trim

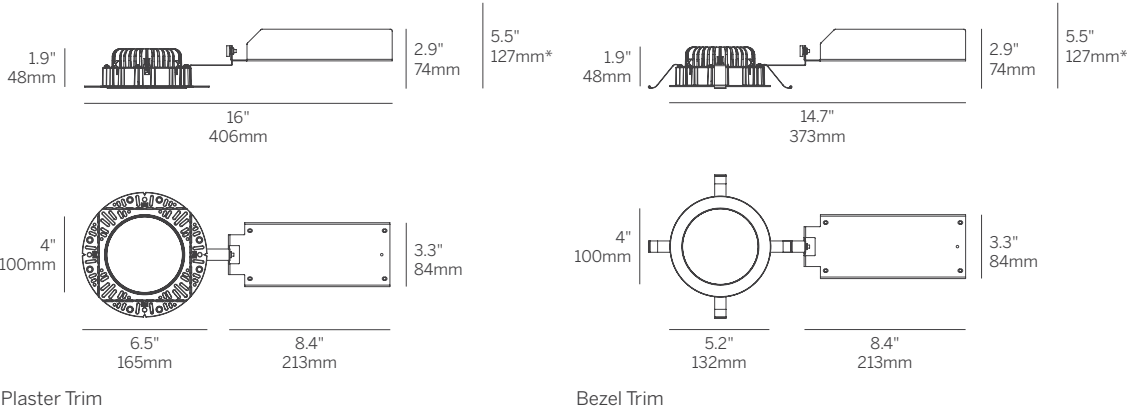

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools D Downlight

Round Flush Diffuser

Model	Fixation	Power ^{1,2}	CRI/CCT ³	Driver ⁴	Lens	Beam	Finish ^{4,5}	Options
WG-100RPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ0 DFPN	FROD	LAM	W S ⁶	LP CP IC

- Model**

 - WG-100RPTD = 4" ProTools D Downlight
- Fixation**

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**

 - L = Low Power, 11W @ 350mA
 - M = Mid Power, 15W @ 500mA
 - H = High Power, 22.5W @ 700mA
- CRI/CCT³**

90+ CRI (Low/Mid/High Power)

 - 927 = 2700K, (849/1185/1609 lm)
 - 930 = 3000K, (873/1218/1655 lm)
 - 935 = 3500K, (920/1284/1744 lm)
 - 940 = 4000K, (971/1354/1839 lm)
- Driver^c**

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)
 - DFPN = Lutron Forward Phase 1% 120VAC
- Lens**

 - FROD = Flush Round Satin Opal Lens
- Beam**

 - LAM = Lambertian
- Finish⁵**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁶
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for 100RPTD-...-FROD-LAM-W. See Page 2 of specsheet for additional details.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.




4" ProTools D Downlight

Square Recessed Cone

Even Illumination From Regressed Lens

- 4" square aperture downlight with wide distribution ambient lighting.
- 0.7" regressed, evenly illuminated, highly efficient Satin Opal Diffuser providing good glare control.
- High efficiency, high transmission diffuser.
- Beam Angle: 110°
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.
- Wet Location as standard option (WL).


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square aperture with minimal ceiling interruption and recessed lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	110 degree beam spread
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

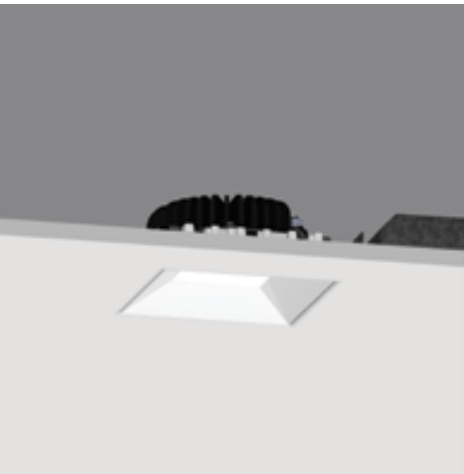

Recessed Plaster Trim



Recessed Bezel Trim

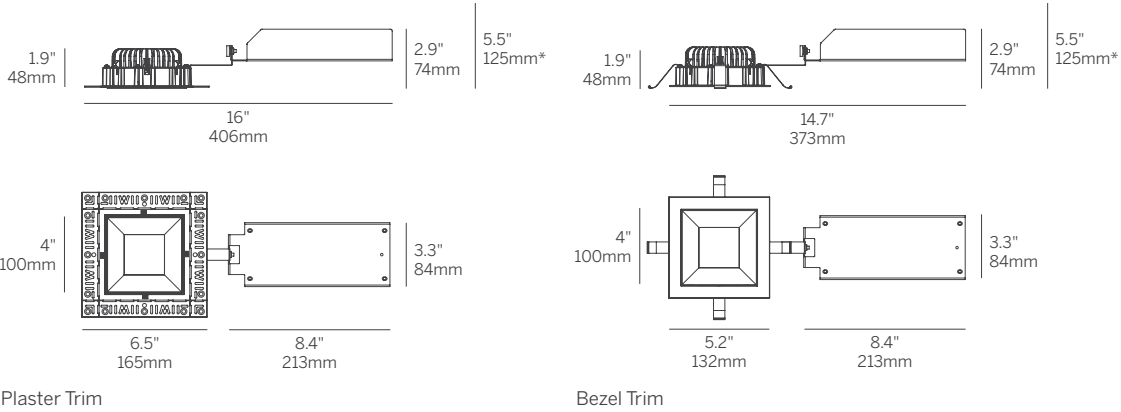

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.

4" ProTools D Downlight

Square Recessed Cone

Model	Fixation	Power ^{1,2}	CRI/CCT ³	Driver ⁴	Cover	Lens	Beam	Finish ⁵	Options
WG-100SPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ0 DFPN	SRC	RSO	110	W S ⁵⁶	LP CP IC WL

Model <ul style="list-style-type: none">■ WG-100SPTD = 4" ProTools D Downlight	Cover <ul style="list-style-type: none">■ SRC = Square Recessed Cone
Fixation <ul style="list-style-type: none">■ RPT = Recessed Plaster Trim■ RBT = Recessed Bezel Trim	Lens <ul style="list-style-type: none">■ RSO = Satin Opal
Power^{1,2} <ul style="list-style-type: none">■ L = Low Power, 11W @ 350mA■ M = Mid Power, 15W @ 500mA■ H = High Power, 22.5W @ 700mA	Beam <ul style="list-style-type: none">■ 110 = 110° Beam Angle
CRI/CCT³ <p>90+ CRI (Low/Mid/High Power)</p> <ul style="list-style-type: none">■ 927 = 2700K, (760/1060/1440 lm)■ 930 = 3000K, (781/1090/1481 lm)■ 935 = 3500K, (824/1149/1561 lm)■ 940 = 4000K, (868/1212/1646 lm)	Finish⁵ <ul style="list-style-type: none">■ W = White, 15% gloss, Tiger Drylac 49/11350 (standard)■ S = Silver, 15% gloss, Tiger Drylac49/90500⁶
Driver⁴ <ul style="list-style-type: none">■ X = Remote driver, ordered separately■ S = Standard non-dim driver, 120-277V■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)■ DFPN = Lutron Forward Phase 1% 120VAC	Options <p>ProTools downlights require no additional options kits for remodel & new construction</p> <ul style="list-style-type: none">■ LP = Landing Pan (specify for Acoustic Ceiling Tile installation)■ CP = Chicago Plenum Housing■ IC = IC/NC Housing■ WL = Wet Location

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumens shown fro 100SPTD-....SRC-RSO-110-W. See Page 2 of specsheet for additional details.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 5 Plaster trim version includes white frame and silver cover.



4" ProTools D Downlight

Round Recessed Cone

Even Illumination From Regressed Lens

- 4" round aperture downlight with wide distribution ambient lighting.
- 0.7" regressed, evenly illuminated, highly efficient Satin Opal Diffuser providing good glare control.
- High efficiency, high transmission diffuser.
- Beam Angle: 110°
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.
- Wet Location as standard option (WL).


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round aperture with minimal ceiling interruption and recessed lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	110 degree beam spread
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated



Recessed Plaster Trim



Recessed Bezel Trim

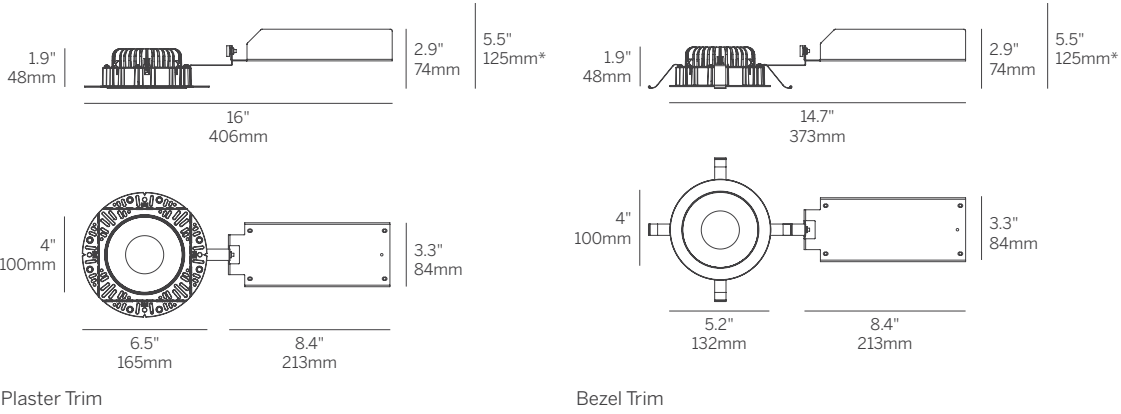

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.

4" ProTools D Downlight

Round Recessed Cone

Model	Fixation	Power ^{1,2}	CRI/CCT ³	Driver ⁴	Cover	Lens	Beam	Finish ⁵	Options
WG-100RPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ0 DFPN	RRC	RSO	110	W S ⁶	LP CP IC WL

Model <ul style="list-style-type: none">■ WG-100RPTD = 4" ProTools D Downlight	Cover <ul style="list-style-type: none">■ RRC = Round Recessed Cone
Fixation <ul style="list-style-type: none">■ RPT = Recessed Plaster Trim■ RBT = Recessed Bezel Trim	Lens <ul style="list-style-type: none">■ RSO = Satin Opal
Power^{1,2} <ul style="list-style-type: none">■ L = Low Power, 11W @ 350mA■ M = Mid Power, 15W @ 500mA■ H = High Power, 22.5W @ 700mA	Beam <ul style="list-style-type: none">■ 110 = 110° Beam Angle
CRI/CCT³ <p>90+ CRI (Low/Mid/High Power)</p> <ul style="list-style-type: none">■ 927 = 2700K, (700/976/1326 lm)■ 930 = 3000K, (719/1004/1364 lm)■ 935 = 3500K, (758/1058/1437 lm)■ 940 = 4000K, (800/1116/1516 lm)	Finish⁵ <ul style="list-style-type: none">■ W = White, 15% gloss, Tiger Drylac 49/11350 (standard)■ S = Silver, 15% gloss, Tiger Drylac49/90500⁶
Driver⁴ <ul style="list-style-type: none">■ X = Remote driver, ordered separately■ S = Standard non-dim driver, 120-277V■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V■ PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V (low and mid power only)■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)■ DFPN = Lutron Forward Phase 1% 120VAC	Options <p>ProTools downlights require no additional options kits for remodel & new construction</p> <ul style="list-style-type: none">■ LP = Landing Pan (specify for Acoustic Ceiling Tile installation)■ CP = Chicago Plenum Housing■ IC = IC/NC Housing■ WL = Wet Location

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for 100RPTD-...-RRC-RSO-110-W. See Page 2 of specsheet for additional details.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.

4" ProTools D Downlight

Square Regressed Pinhole

Even Illumination From Regressed Lens

- 4" square aperture downlight with wide distribution ambient lighting.
- 0.7" regressed, evenly illuminated, highly efficient Satin Opal Diffuser providing good glare control.
- High efficiency, high transmission diffuser.
- Beam Angle: 110°
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square regressed pinhole with minimal ceiling interruption and satin opal lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	110 degree beam spread
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE



Recessed Plaster Trim



Recessed Bezel Trim

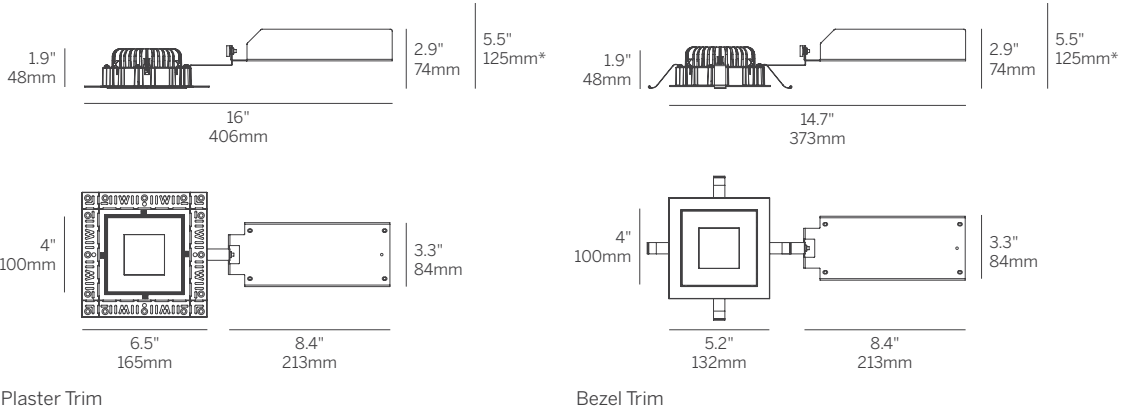

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.

4" ProTools D Downlight

Square Regressed Pinhole

Model	Fixation	Power ^{1,2}	CRI/CCT ³	Driver ⁴	Cover	Lens	Beam	Finish ⁵	Options
WG-100SPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ0 DFPN	SRP	RSO	110	W S ⁶	LP CP IC

Model <ul style="list-style-type: none">■ WG-100SPTD = 4" ProTools D Downlight	Cover <ul style="list-style-type: none">■ SRP = Square Regressed Pinhole
Fixation <ul style="list-style-type: none">■ RPT = Recessed Plaster Trim■ RBT = Recessed Bezel Trim	Lens <ul style="list-style-type: none">■ RSO = Satin Opal
Power^{1,2} <ul style="list-style-type: none">■ L = Low Power, 11W @ 350mA■ M = Mid Power, 15W @ 500mA■ H = High Power, 22.5W @ 700mA	Beam <ul style="list-style-type: none">■ 110 = 110° Beam Angle
CRI/CCT³ <p>90+ CRI (Low/Mid/High Power)</p> <ul style="list-style-type: none">■ 927 = 2700K, (741/1034/1405 lm)■ 930 = 3000K, (762/1064/1445 lm)■ 935 = 3500K, (803/1121/1523 lm)■ 940 = 4000K, (847/1182/1606 lm)	Finish⁵ <ul style="list-style-type: none">■ W = White, 15% gloss, Tiger Drylac 49/11350 (standard)■ S = Silver, 15% gloss, Tiger Drylac49/90500⁶
Driver⁴ <ul style="list-style-type: none">■ X = Remote driver, ordered separately■ S = Standard non-dim driver, 120-277V■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)■ DFPN = Lutron Forward Phase 1% 120VAC	Options <p>ProTools downlights require no additional options kits for remodel & new construction</p> <ul style="list-style-type: none">■ LP = Landing Pan (specify for Acoustic Ceiling Tile installation)■ CP = Chicago Plenum Housing■ IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for 100SPTD-...-SRP-RSO-110-W. See Page 2 of specsheet for additional details.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.



4" ProTools D Downlight

Round Regressed Pinhole

Even Illumination From Regressed Lens

- 4" round aperture downlight with wide distribution ambient lighting.
- 0.7" regressed, evenly illuminated, highly efficient Satin Opal Diffuser providing good glare control.
- High efficiency, high transmission diffuser.
- Beam Angle: 110°
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round regressed pinhole with minimal ceiling interruption and satin opal lens
LED	90+ CRI Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Beam	110 degree beam spread
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE



Recessed Plaster Trim



Recessed Bezel Trim

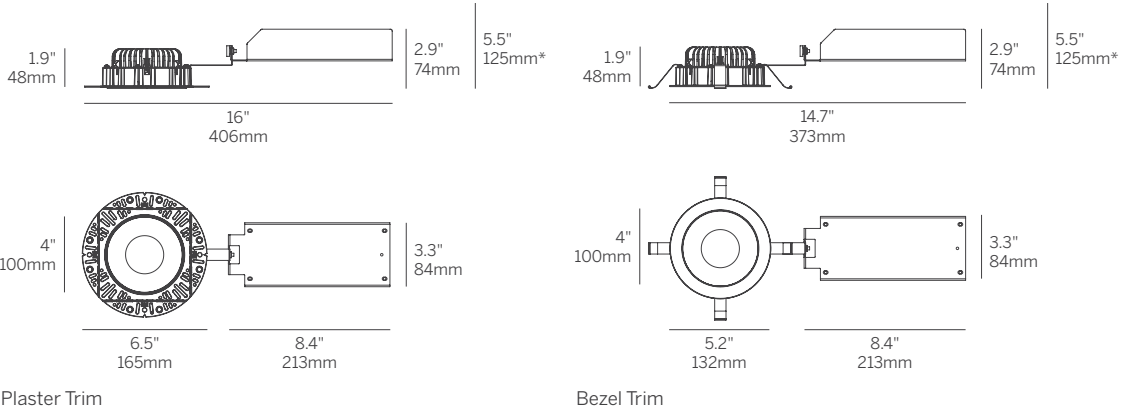

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.

4" ProTools D Downlight

Round Regressed Pinhole

Model	Fixation	Power ^{1,2}	CRI/CCT ³	Driver ⁴	Cover	Lens	Beam	Finish ⁵	Options
WG-100RPTD	RPT RBT	L M H	927 930 935 940	X S D010 PEQ0 DFPN	RRP	RSO	110	W S ⁶	LP CP IC

Model <ul style="list-style-type: none">■ WG-100SRTD = 4" ProTools D Downlight	Cover <ul style="list-style-type: none">■ RRP = Round Regressed Pinhole
Fixation <ul style="list-style-type: none">■ RPT = Recessed Plaster Trim■ RBT = Recessed Bezel Trim	Lens <ul style="list-style-type: none">■ RSO = Satin Opal
Power^{1,2} <ul style="list-style-type: none">■ L = Low Power, 11W @ 350mA■ M = Mid Power, 15W @ 500mA■ H = High Power, 22.5W @ 700mA	Beam <ul style="list-style-type: none">■ 110 = 110° Beam Angle
CRI/CCT³ <p>90+ CRI (Low/Mid/High Power)</p> <ul style="list-style-type: none">■ 927 = 2700K, (657/916/1245 lm)■ 930 = 3000K, (675/942/1280 lm)■ 935 = 3500K, (712/993/1349 lm)■ 940 = 4000K, (751/1047/1423 lm)	Finish⁵ <ul style="list-style-type: none">■ W = White, 15% gloss, Tiger Drylac 49/11350 (standard)■ S = Silver, 15% gloss, Tiger Drylac49/90500⁶
Driver⁴ <ul style="list-style-type: none">■ X = Remote driver, ordered separately■ S = Standard non-dim driver, 120-277V■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V (low and mid power only)■ DFPN = Lutron Forward Phase 1% 120VAC	Options <p>ProTools downlights require no additional options kits for remodel & new construction</p> <ul style="list-style-type: none">■ LP = Landing Pan (specify for Acoustic Ceiling Tile installation)■ CP = Chicago Plenum Housing■ IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumens shown for 100RPTD-...RRP-RSO-110-W. See Page 2 of specsheet for additional details..
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.



4" ProTools DL Downlight

Square Recessed Cone

Multiple Beam Options From Recessed Source

- 4" square downlight with 2" light aperture.
 - 0.7" regressed aperture / lens position provides good glare control.
 - Beam Angle: Various, Cut Off: 55°.
 - Open aperture, clear lens or high transmission diffuser.
 - Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Wet Location as standard option (WL).


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32, 41 and 65 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated



Recessed Plaster Trim



Recessed Bezel Trim

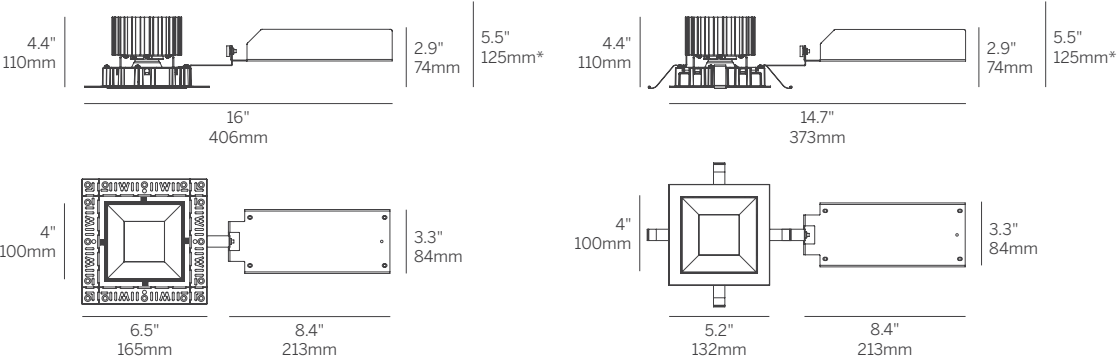

Plaster Trim

Bezel Trim



Design Guide
154-161

4" ProTools DL Downlight

Square Recessed Cone

Model	Fixation	Power ^{1,2}	CRI/ CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100SPTDLF	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SRC	OA MPL RSC	16 32 41 65	W S ⁷	LP CP IC WL

- Model**

 - WG-100SPTDLF = 4" ProTools DL Downlight
- Fixation**

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**

 - L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**

90+ CRI (Low/Mid/High/Extra High)

 - 927 = 2700K, (552/766/1031/1445 lm)
 - 930 = 3000K, (594/824/1110/1555 lm)
 - 935 = 3500K, (594/824/1110/1555 lm)
 - 940 = 4000K, (636/883/1188/1664 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**

 - SRC = Square Recessed Cone
- Lens**

 - OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**

 - 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle
 - 65 = 65° Beam Angle
- Finish⁶**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
 - WL = Wet Location (not available with open aperture)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown fro WG-100RPTDLF-....-SRC-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.



4" ProTools DL Downlight

Round Recessed Cone

Multiple Beam Options From Recessed Source

- 4" round downlight with 2" light aperture.
- 0.7" regressed aperture / lens position provides good glare control.
- Beam Angle: Various, Cut Off: 50°.
- Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Wet Location as standard option (WL).

Housing Die-caste aluminum for precision fit and heat dissipation
Mounting hardware for all ceiling types; trim and trimless
EZ clip mounting for secure installation
Snap-in cover
Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings

Covers Round recessed cone - low brightness, general illumination

LED 90+ CRI
Low/Mid/High/Extra High output choices
2700K, 3000K, 3500K, 4000K
Tunable White from 1800K - 4000K
Warm Dim from 1800 - 3000K

Beam 16, 32, 41 and 65 degree beam spreads

Driver Integral and remote drivers for all dimming and non-dimming applications
Through-wire integral driver enclosure installed from below without the need for bulky housing
POE driver compatibility

Installation Not required when using the Driver Enclosure
Housing Optional: IC and Chicago plenum
Optional: new construction (with j-box and driver attached)
Optional: Landing pan for use with Driver Enclosure to locate cut-out locations

Warranty 5-year Limited (see complete company warranty information)


Certifications ETL and ETL-C for dry and damp location, CE, Wet Location rated



Recessed Plaster Trim



Recessed Bezel Trim

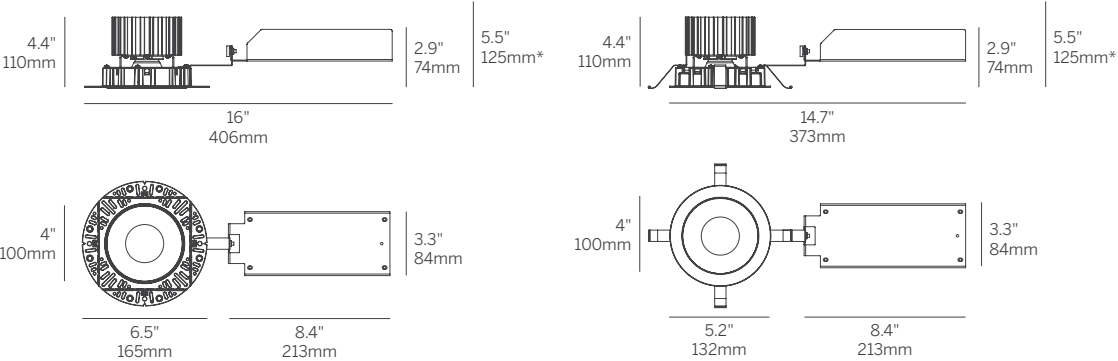

Plaster Trim

Bezel Trim

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DL Downlight

Round Recessed Cone

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100RPTDLF	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RRC	OA MPL RSC	16 32 41 65	W S ⁷	LP CP IC WL

Model
■ WG-100RPTDLF = 4" ProTools DL Downlight

Fixation
■ RPT = Recessed Plaster Trim
■ RBT = Recessed Bezel Trim

Power^{1,2}
■ L = Low Power, 5.7W @ 350mA
■ M = Mid Power, 8.4W @ 500mA
■ H = High Power, 12W @ 700mA
■ XH = Extra High Power, 17.8W @ 1050mA
■ TW = 9W @ 500mA
■ WD = 0.4 - 11.8W @ 350mA³

CRI/CCT⁴
90+ CRI (Low/Mid/High/Extra High)
■ 927 = 2700K, (492/683/919/1287 lm)
■ 930 = 3000K, (529/734/989/1385 lm)
■ 935 = 3500K, (529/734/989/1385 lm)
■ 940 = 4000K, (567/786/1058/1483 lm)
■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³

Driver⁵
■ X = Remote driver, ordered separately
■ S = Standard non-dim driver, 120-277V
■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V
■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
■ DFPN = Lutron Forward Phase 1% 120VAC
■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V

Cover
■ RRC = Round Recessed Cone

Lens
■ OA = Open Aperture
■ MPL = Micro-prismatic Lens
■ RSC = Satin Clear

Beam
■ 16 = 16° Beam Angle
■ 32 = 32° Beam Angle
■ 41 = 41° Beam Angle
■ 65 = 65° Beam Angle

Finish⁶
■ W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
■ S = Silver, 15% gloss, Tiger Drylac49/90500⁷

Options
ProTools downlights require no additional options kits for remodel & new construction
■ LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
■ CP = Chicago Plenum Housing
■ IC = IC/NC Housing
■ WL = Wet Location (not available with open aperture)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Available with PEQ0 and DFPN drivers only.
 - 4 Delivered lumen data shown fro WG-100RPTDLF-...-SRC-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
 - 5 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.



4" ProTools DL Downlight

Square Regressed Pinhole

Multiple Beam Options From Regressed Source

- 4" square downlight with 2" light aperture.
- 1/2" regressed aperture / lens position provides good glare control.
- Beam Angle: Various, Cut Off: 55°.
- Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.

Housing Die-caste aluminum for precision fit and heat dissipation
Mounting hardware for all ceiling types; trim and trimless
EZ clip mounting for secure installation
Snap-in cover
Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings

Covers Square regressed pinhole - smallest apperture, maximum glare control

LED 90+ CRI
Low/Mid/High/Extra High output choices
2700K, 3000K, 3500K, 4000K
Tunable White from 1800K - 4000K
Warm Dim from 1800 - 3000K


Beam 16, 32, 41 and 65 degree beam spreads

Driver Integral and remote drivers for all dimming and non-dimming applications
Through-wire integral driver enclosure installed from below without the need for bulky housing
POE driver compatibility

Installation Not required when using the Driver Enclosure
Housing Optional: IC and Chicago plenum
Optional: new construction (with j-box and driver attached)
Optional: Landing pan for use with Driver Enclosure to locate cut-out locations

Warranty 5-year Limited (see complete company warranty information)


Certifications ETL and ETL-C for dry and damp location, CE

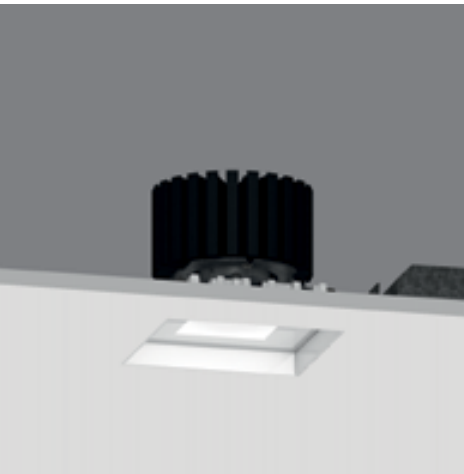

Recessed Plaster Trim



Recessed Bezel Trim

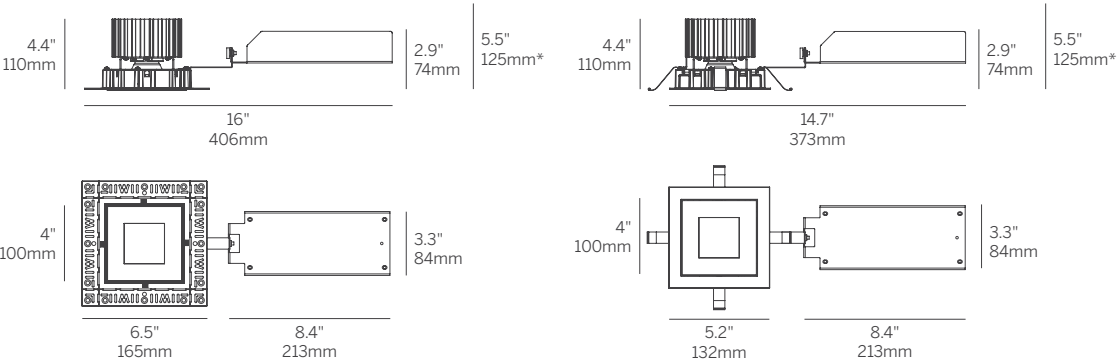

Plaster Trim

Bezel Trim

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DL Downlight

Square Regressed Pinhole

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100SPTDLF	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SRP	OA MPL RSC	16 32 41 65	W S ⁷	LP CP IC

Model
■ WG-100SPTDLF = 4" ProTools DL Downlight

Fixation
■ RPT = Recessed Plaster Trim
■ RBT = Recessed Bezel Trim

Power^{1,2}
■ L = Low Power, 5.7W @ 350mA
■ M = Mid Power, 8.4W @ 500mA
■ H = High Power, 12W @ 700mA
■ XH = Extra High Power, 17.8W @ 1050mA
■ TW = 9W @ 500mA
■ WD = 0.4 - 11.8W @ 350mA³

CRI/CCT⁴
90+ CRI (Low/Mid/High/Extra High)
■ 927 = 2700K, (494/686/923/1293 lm)
■ 930 = 3000K, (532/738/ 993/1391 lm)
■ 935 = 3500K, (532/738/993/1391 lm)
■ 940 = 4000K, (569/790/1063/1489 lm)
■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³

Driver⁵
■ X = Remote driver, ordered separately
■ S = Standard non-dim driver, 120-277V
■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V
■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
■ DFPN = Lutron Forward Phase 1% 120VAC
■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V

Cover
■ SRP = Square Regressed Pinhole

Lens
■ OA = Open Aperture
■ MPL = Micro-prismatic Lens
■ RSC = Satin Clear

Beam
■ 16 = 16° Beam Angle
■ 32 = 32° Beam Angle
■ 41 = 41° Beam Angle
■ 65 = 65° Beam Angle

Finish⁶
■ W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
■ S = Silver, 15% gloss, Tiger Drylac49/90500⁷

Options
ProTools downlights require no additional options kits for remodel & new construction
■ LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
■ CP = Chicago Plenum Housing
■ IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Available with PEQ0 and DFPN drivers only.
 - 4 Delivered lumen data shown for WG-100RPTDLF-...-SRP-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
 - 5 See power supply page for details.
 - 6 See Tiger Drylac color chart: inter-lux.com/tiger
 - 7 Plaster trim version includes white frame and silver cover.

4" ProTools DL Downlight

Round Regressed Pinhole

Multiple Beam Options From Regressed Source

- 4" round downlight with 2" light aperture.
 - 1/2" regressed aperture / lens position provides good glare control.
 - Beam Angle: Various, Cut Off: 55°.
 - Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.

Housing Die-caste aluminum for precision fit and heat dissipation
Mounting hardware for all ceiling types; trim and trimless
EZ clip mounting for secure installation
Snap-in cover
Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings

Covers Round regressed pinhole - smallest apperture, maximum glare control

LED 90+ CRI
Low/Mid/High/Extra High output choices
2700K, 3000K, 3500K, 4000K
Tunable White from 1800K - 4000K
Warm Dim from 1800 - 3000K

Beam 16, 32, 41 and 65 degree beam spreads

Driver Integral and remote drivers for all dimming and non-dimming applications
Through-wire integral driver enclosure installed from below without the need for bulky housing
POE driver compatibility

Installation Not required when using the Driver Enclosure
Housing Optional: IC and Chicago plenum
Optional: new construction (with j-box and driver attached)
Optional: Landing pan for use with Driver Enclosure to locate cut-out locations

Warranty 5-year Limited (see complete company warranty information)


Certifications ETL and ETL-C for dry and damp location, CE



Recessed Plaster Trim



Recessed Bezel Trim

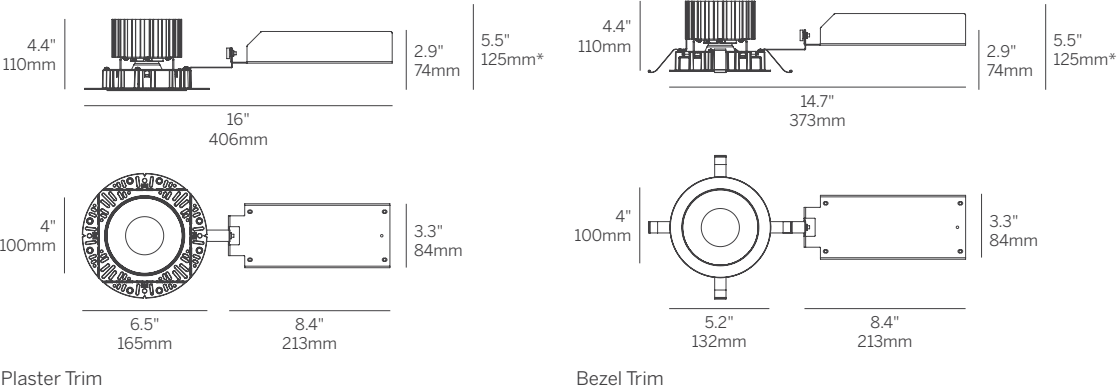

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DL Downlight

Round Regressed Pinhole

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100RPTDLF	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RRP	OA MPL RSC	16 32 41 65	W S ⁷	LP CP IC

Model
■ WG-100RPTDLF = 4" ProTools DL Downlight

Fixation
■ RPT = Recessed Plaster Trim
■ RBT = Recessed Bezel Trim

Power^{1,2}
■ L = Low Power, 5.7W @ 350mA
■ M = Mid Power, 8.4W @ 500mA
■ H = High Power, 12W @ 700mA
■ XH = Extra High Power, 17.8W @ 1050mA
■ TW = 9W @ 500mA
■ WD = 0.4 - 11.8W @ 350mA³

CRI/CCT³
90+ CRI (Low/Mid/High/Extra High)
■ 927 = 2700K, (492/683/919/1287 lm)
■ 930 = 3000K, (529/734/989/1385 lm)
■ 935 = 3500K, (529/734/989/1385 lm)
■ 940 = 4000K, (567/786/1058/1483 lm)
■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³

Driver⁴
■ X = Remote driver, ordered separately
■ S = Standard non-dim driver, 120-277V
■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V
■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
■ DFPN = Lutron Forward Phase 1% 120VAC
■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V

Cover
■ RRP = Round Regressed Pinhole

Lens
■ OA = Open Aperture
■ MPL = Micro-prismatic Lens
■ RSC = Satin Clear

Beam
■ 16 = 16° Beam Angle
■ 32 = 32° Beam Angle
■ 41 = 41° Beam Angle
■ 65 = 65° Beam Angle

Finish⁶
■ W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
■ S = Silver, 15% gloss, Tiger Drylac49/90500⁷

Options
ProTools downlights require no additional options kits for remodel & new construction
■ LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
■ CP = Chicago Plenum Housing
■ IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- Other lumen packages available, consult factory.
 - Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - Delivered lumen data shown for WG-100RPTDLF -...-RRP-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
 - See power supply page for details.
 - See Tiger Drylac color chart: inter-lux.com/tiger
 - Plaster trim version includes white frame and silver cover.




4" ProTools DL Adjustable Square Recessed Cone


Multiple Beam Options With Pan And Tilt Adjustment From Regressed Source

- 4" square downlight with 2" light aperture.
- 0.7" regressed aperture / lens position provides good glare control.
- Beam Angle: Various, Cut Off: 35°.
- Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 40°, rotation 365°, 144 step.
- Wet Location as standard option (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

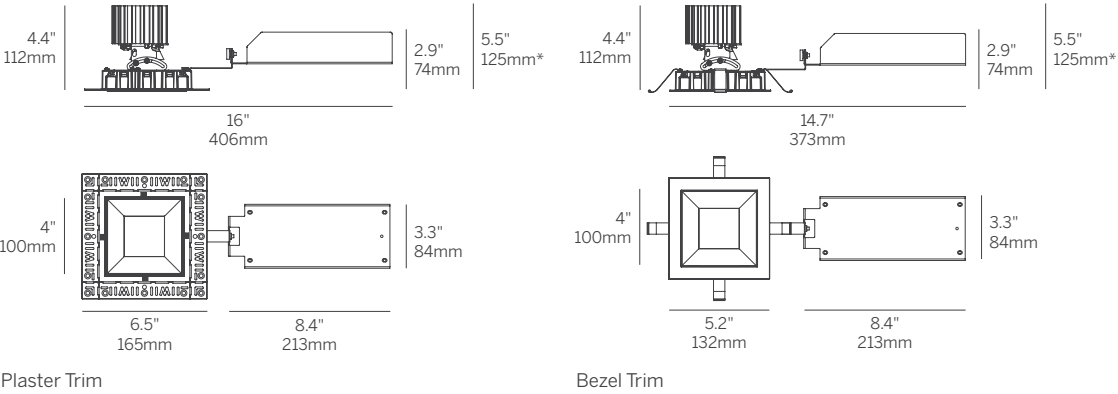

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DL Adjustable Square Recessed Cone

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁵	Options
WG-100SPTDLA	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SRC	OA MPL RSC	16 32 41	W S ⁷	LP CP IC WL

Model

- WG-100SPTDLA = 4" ProTools DL Ajustable

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power^{1,2}

- L = Low Power, 5.7W @ 350mA
- M = Mid Power, 8.4W @ 500mA
- H = High Power, 12W @ 700mA
- XH = Extra High Power, 17.8W @ 1050mA
- TW = 9W @ 500mA
- WD = 0.4 - 11.8W @ 350mA³

CRI/CCT⁴

- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (552/766/1031/1445 lm)
- 930 = 3000K, (594/824/1110/1555 lm)
- 935 = 3500K, (594/824/1110/1555 lm)
- 940 = 4000K, (636/883/1188/1664 lm)
- TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
- WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³

Driver⁵

- X = Remote driver, ordered separately
- S = Standard non-dim driver, 120-277V
- D010 = EldoLED, 1%, 0-10V Driver, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC
- TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V

Cover

- SRC = Square Recessed Cone

Lens

- OA = Open Aperture
- MPL = Micro-prismatic Lens
- RSC = Satin Clear

Beam

- 16 = 16° Beam Angle
- 32 = 32° Beam Angle
- 41 = 41° Beam Angle

Finish⁶

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac49/90500⁷

Options

ProTools downlights require no additional options kits for remodel & new construction

- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- CP = Chicago Plenum Housing
- IC = IC/NC Housing
- WL = Wet Location (not available with open aperture)

Whitegoods reserves the right to change any information without prior notice.

Notes

- Other lumen packages available, consult factory.
- Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- Delivered lumen data shown for WG-100SPTDLA-...-SRC-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
- See power supply page for details.
- See Tiger Drylac color chart: inter-lux.com/tiger
- Plaster trim version includes white frame and silver cover.




4" ProTools DL Adjustable Round Recessed Cone

Multiple Beam Options With Pan And Tilt Adjustment From Regressed Source

- 4" round downlight with 2" light aperture.
 - 0.7" regressed aperture / lens position provides good glare control.
 - Beam Angle: Various, Cut Off: 35°.
 - Open aperture, clear lens or high transmission diffuser.
 - Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 40°, rotation 365°, 144 step.
 - Wet Location as standard option (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

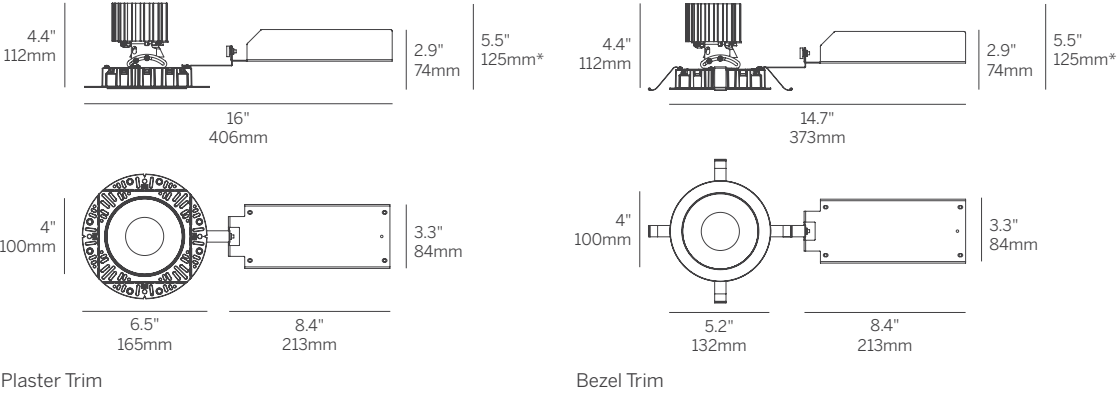

Recessed Plaster Trim



Recessed Bezel Trim

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DL Adjustable Round Recessed Cone

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100SPTDLA	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RRC	OA MPL RSC	16 32 41	W S ⁷	LP CP IC WL

- Model**

 - WG-100SPTDLA = 4" ProTools DL Adjustable
- Fixation**

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**

 - L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**

90+ CRI (Low/Mid/High/Extra High)

 - 927 = 2700K, (492/683/919/1287 lm)
 - 930 = 3000K, (529/734/989/1385 lm)
 - 935 = 3500K, (529/734/989/1385 lm)
 - 940 = 4000K, (567/786/1058/1483 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁴**

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**

 - RRC = Round Recessed Cone
- Lens**

 - OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**

 - 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle
- Finish⁶**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
 - WL = Wet Location (not available with open aperture)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for WG-100RPTDLA-...-RRC-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.





4" ProTools DL Adjustable Square Regressed Pinhole


Multiple Beam Options With Pan And Tilt Adjustment From Regressed Source

- 4" square downlight with 2" light aperture.
- 1/2" regressed aperture / lens position provides good glare control.
- Beam Angle: Various, Cut Off: 35°.
- Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 40°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

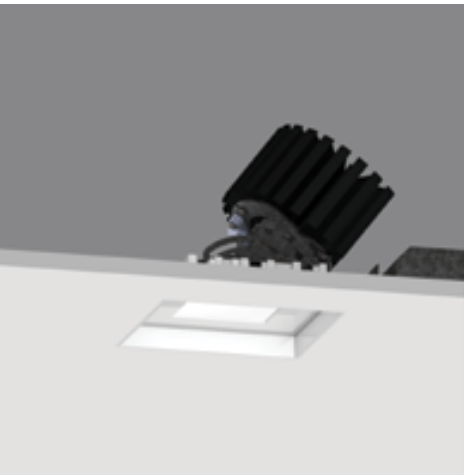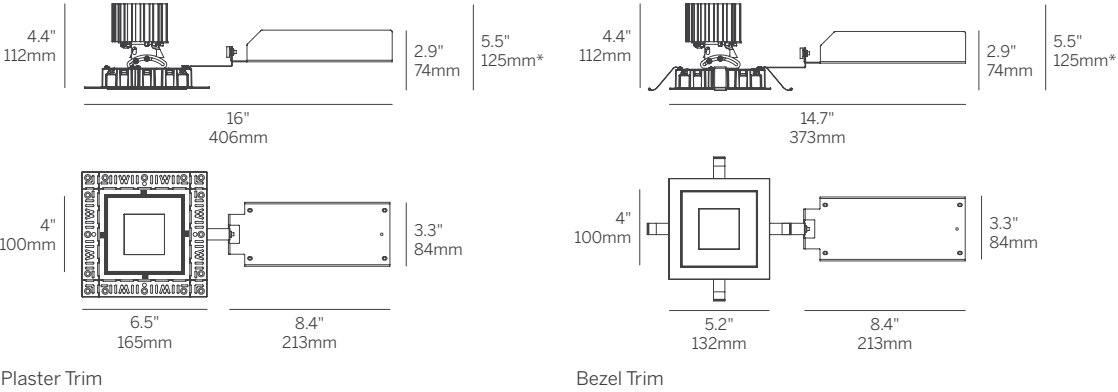

Recessed Plaster Trim

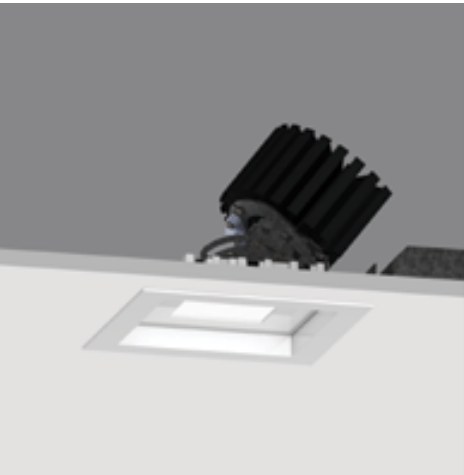

Recessed Bezel Trim

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DL Adjustable Square Regressed Pinhole

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁷	Options
WG-100SPTDLA	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SRP	OA MPL RSC	16 32 41	W S ⁷	LP CP IC

- Model**
- WG-100SPTDLA = 4" ProTools DL Adjustable
- Fixation**
- RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**
- L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA
- CRI/CCT⁴**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (494/686/923/1293 lm)
 - 930 = 3000K, (532/738/993/1391 lm)
 - 935 = 3500K, (532/738/993/1391 lm)
 - 940 = 4000K, (569/790/1063/1489 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)
- Driver⁵**
- X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**
- SRP = Square Regressed Pinhole
- Lens**
- OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**
- 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle
- Finish⁶**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for WG-00SPTDLA-...-SRP-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.




4" ProTools DL Adjustable Round Regressed Pinhole

Multiple Beam Options With Pan And Tilt Adjustment From Regressed Source

- 4" round downlight with 2" light aperture.
- 1/2" regressed aperture / lens position provides good glare control.
- Beam Angle: Various, Cut Off: 35°.
- Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 40°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

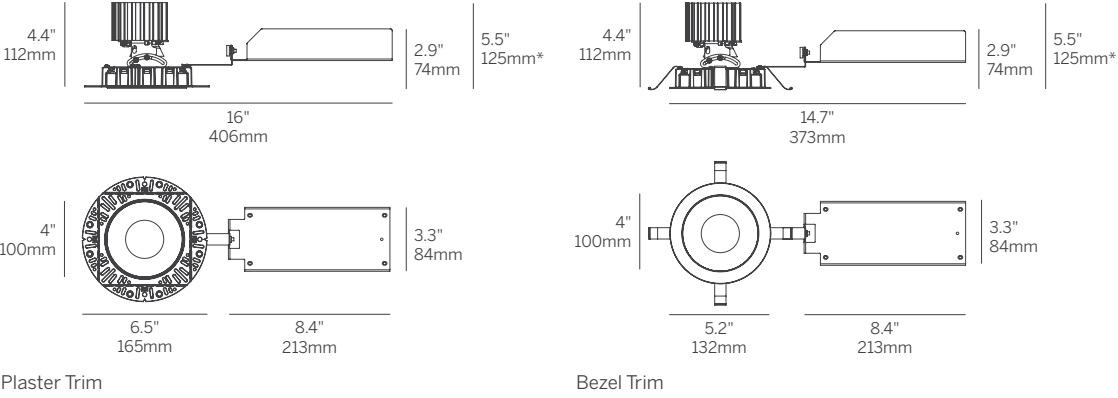

Recessed Plaster Trim



Recessed Bezel Trim

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DL Adjustable Round Regressed Pinhole

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100RPTDLA	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RRP	OA MPL RSC	16 32 41	W S ⁷	LP CP IC

- Model**
 - WG-100RPTDLA = 4" ProTools DL Adjustable
- Fixation**
 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**
 - L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**

90+ CRI (Low/Mid/High/Extra High)

 - 927 = 2700K, (492/683/919/1287 lm)
 - 930 = 3000K, (529/734/989/1385 lm)
 - 935 = 3500K, (529/734/989/1385 lm)
 - 940 = 4000K, (567/786/1058/1483 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**
 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**
 - RRP = Round Regressed Pinhole
- Lens**
 - OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**
 - 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle
- Finish⁶**
 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
 - Other lumen packages available, consult factory.
 - Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - Delivered lumen data shown for WG-100RPTDLA-...-RRP-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
 - See power supply page for details.
 - See Tiger Drylac color chart: inter-lux.com/tiger
 - Plaster trim version includes white frame and silver cover.





4" ProTools DL Adjustable Square Asymmetric Cone


Asymmetric Cover For Minimum Beam Clipping
With Wider Angle Optics And Higher Angle Focusing

- 4" square downlight with 2" light aperture.
 - 0.7 regressed aperture / lens position provides good glare control.
 - Beam Angle: Various
 - Asymmetric cover to minimize beam clipping when tilted.
 - Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 40°, rotation 365°, 144 step.
 - Wet Location as standard option (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

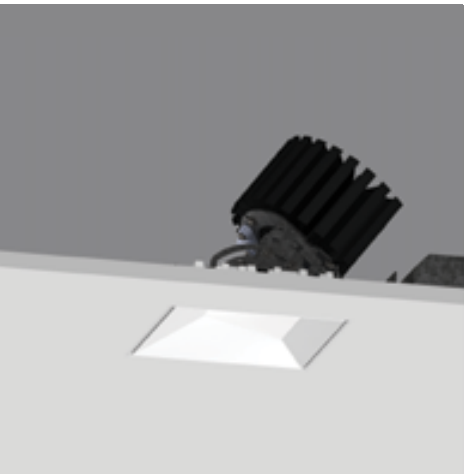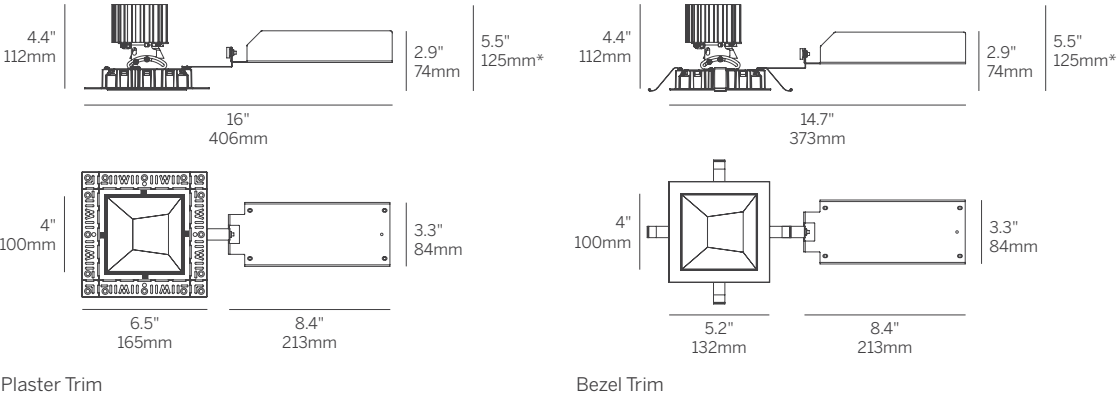

Recessed Plaster Trim

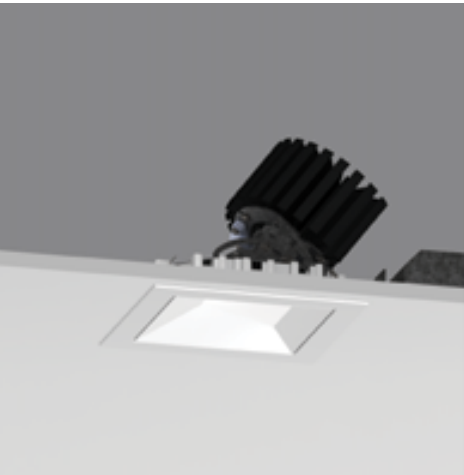

Recessed Bezel Trim



4" ProTools DL Adjustable Square Asymmetric Cover

Model	Fixation	Power ^{1,2}	CRI/ CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁵	Options
WG-100SPTDLA	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SAC	OA MPL RSC	16 32 41	W S ⁷	LP CP IC WL

- Model**

 - WG-100SPTDLA = 4" ProTools DL Adjustable
- Fixation**

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**

 - L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**

90+ CRI (Low/Mid/High/Extra High)

 - 927 = 2700K, (447/620/834/1169 lm)
 - 930 = 3000K, (481/667/898/1258 lm)
 - 935 = 3500K, (481/667/898/1258 lm)
 - 940 = 4000K, (515/714/961/1347 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**

 - SAC = Square Asymmetric Cone
- Lens**

 - OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**

 - 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle
- Finish⁶**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
 - WL = Wet Location (not available with open aperture)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for WG-100SPTDLA-...-SAC-OA-16-W. See page 2 of specsheet for delivered lumen data for other product configurations.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.




4" ProTools DL Adjustable Round Asymmetric Cone

Asymmetric Cover For Minimum Beam Clipping
With Wider Angle Optics And Higher Angle Focusing

- 4" round downlight with 2" light aperture.
 - 0.7" regressed aperture / lens position provides good glare control.
 - Beam Angle: Various
 - Asymmetric cover to minimize beam clipping when tilted.
 - Open aperture, clear lens or high transmission diffuser.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 40°, rotation 365°, 144 step.
 - Wet Location as standard option (WL).




Recessed Plaster Trim

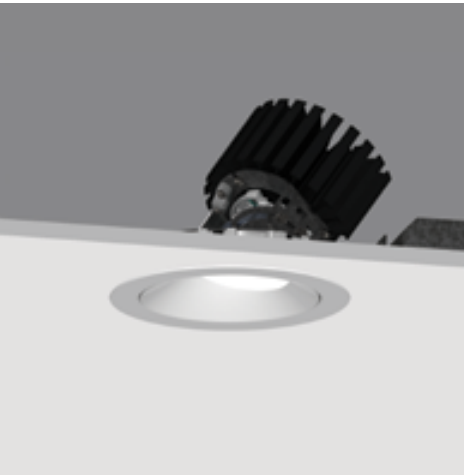

Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

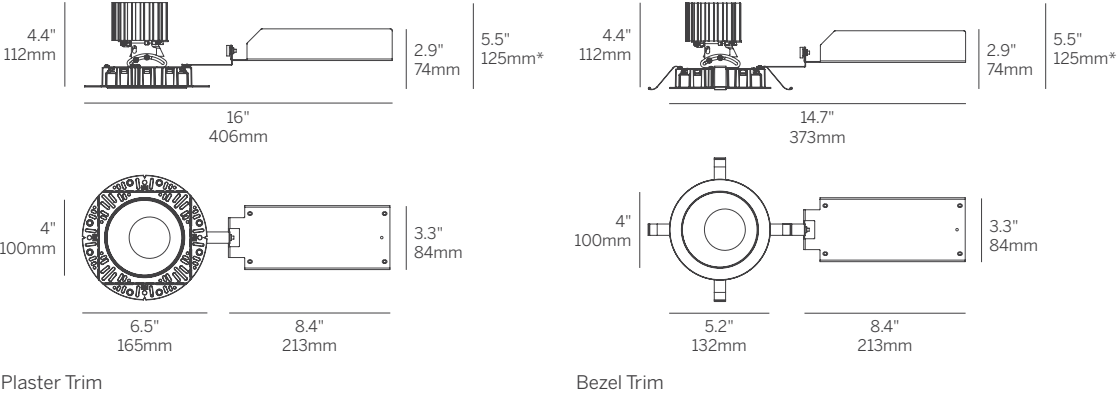

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DL Adjustable Round Asymmetric Cone

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100RPTDLA	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RAC	OA MPL RSC	16 32 41	W S ⁷	LP CP IC WL

- Model**

 - WG-100RPTDLA = 4" ProTools DL Adjustable
- Fixation**

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**

 - L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**

90+ CRI (Low/Mid/High/Extra High)

 - 927 = 2700K, (501/695/936/1311 lm)
 - 930 = 3000K, (539/748/1007/1410 lm)
 - 935 = 3500K, (539/748/1007/1410 lm)
 - 940 = 4000K, (577/801/1078/1510 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**

 - RAC = Round Asymmetric Cone
- Lens**

 - OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**

 - 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle
- Finish⁶**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
 - WL = Wet Location (not available with open aperture)

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for WG-100RPTDLA-...-RAC-OA-16-W. Refer to page 2 of specsheet for delivered lumen data for other product configurations.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.




4" ProTools DL Wall Wash

Square Wall Wash

Dedicated Wall Wash Luminaire for Even Illumination of Vertical Surfaces

- 4" square downlight with 2" light aperture.
- 0.7" regressed aperture / lens providing asymmetric beam distribution optimized for even illumination of vertical surfaces.
- High-angle illumination.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Wet Location as standard option (WL).

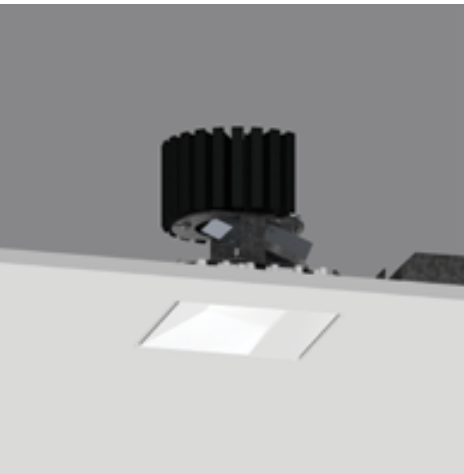


Recessed Plaster Trim



Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Flush aperture with room-side cutoff and wall wash distribution
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	Satin spread lens (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

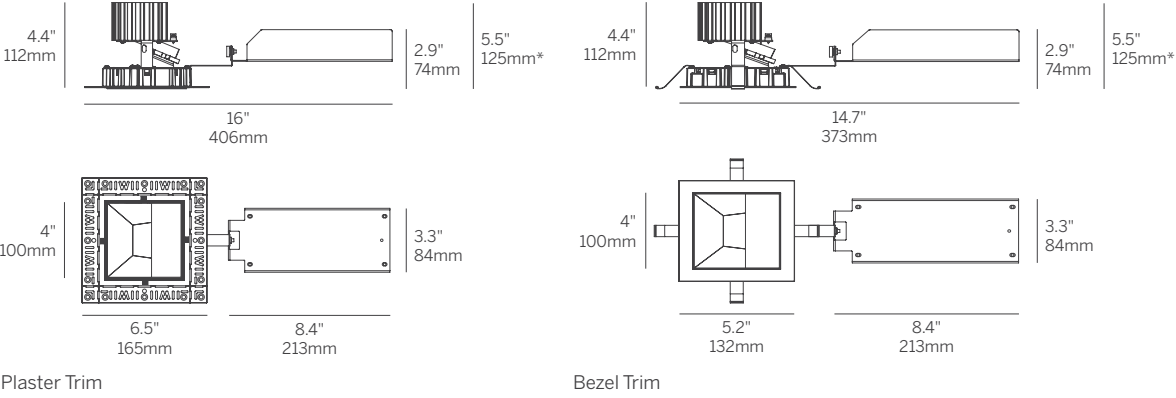

4" ProTools DL Wall Wash

Square Wall Wash

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Finish ⁶	Options
WG-100SPTDLWW	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SWW	WWL	W S ⁷	LP CP IC WL

- Model**
- WG-100SPTDLWW = 4" ProTools DL Wall Wash
- Fixation**
- RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**
- L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (322/446/600/841 lm)
 - 930 = 3000K, (346/480/646/905 lm)
 - 935 = 3500K, (346/480 / 646/905 lm)
 - 940 = 4000K, (371/514/692/969 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**
- X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**
- SWW = Square Wall Wash
- Lens**
- WWL = Wall Wash Spread Lens
- Finish⁶**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
 - WL = Wet Location

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for WG-100SPTDLWW-...-SWW-WWL-W. Refer to page 2 of specsheet for additional details.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and silver cover.





4" ProTools DL Wall Wash

Round Wall Wash

Dedicated Wall Wash Luminaire for Even Illumination of Vertical Surfaces

- 4" round downlight with 2" light aperture.
- 0.7" regressed aperture / lens providing asymmetric beam distribution optimized for even illumination of vertical surfaces.
- High-angle illumination.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Wet Location as standard option (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Flush aperture with room-side cutoff and wall wash distribution
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	Satin spread lens (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

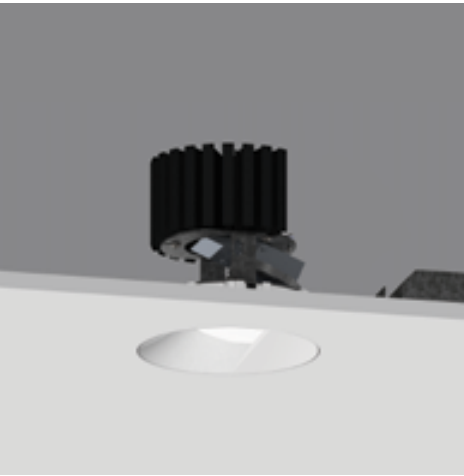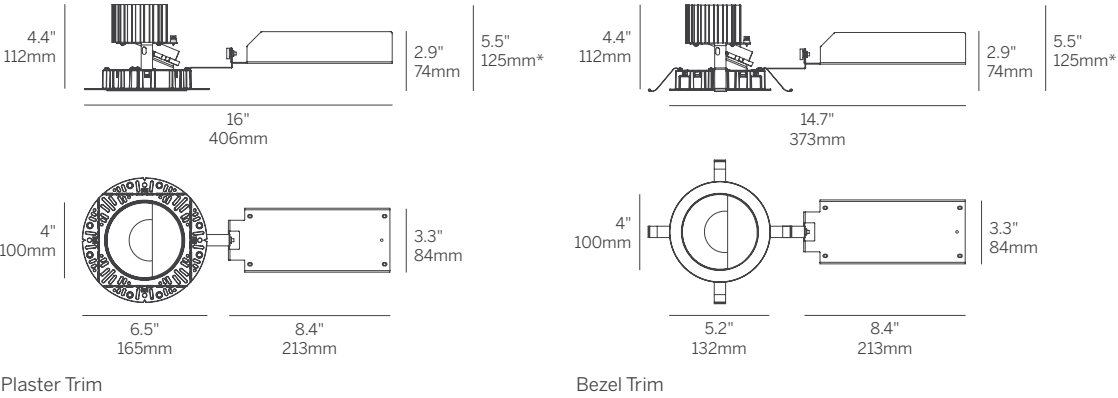

Recessed Plaster Trim



Recessed Bezel Trim



Design Guide
162-165

4" ProTools DL Wall Wash

Round Wall Wash

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Finish ⁶	Options
WG-100RPTDLWW	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RWW	WWL	W S ⁷	LP CP IC WL

Model

- WG-100RPTDLWW = 4" ProTools DL Wall Wash

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power^{1,2}

- L = Low Power, 5.7W @ 350mA
- M = Mid Power, 8.4W @ 500mA
- H = High Power, 12W @ 700mA
- XH = Extra High Power, 17.8W @ 1050mA
- TW = 9W @ 500mA
- WD = 0.4 - 11.8W @ 350mA³

CRI/CCT⁴

- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (267/371/499/699 lm)
- 930 = 3000K, (288/399/537/752 lm)
- 935 = 3500K, (288/399/537/752 lm)
- 940 = 4000K, (308/427/575/806 lm)
- TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
- WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³

Driver⁵

- X = Remote driver, ordered separately
- S = Standard non-dim driver, 120-277V
- D010 = EldoLED, 1%, 0-10V Driver, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC
- TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V

Cover

- RWW = Round Wall Wash

Lens

- WWL = Wall Wash Spread Lens

Finish⁶

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac49/90500⁷

Options

ProTools downlights require no additional options kits for remodel & new construction

- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- CP = Chicago Plenum Housing
- IC = IC/NC Housing
- WL = Wet Location

Whitegoods reserves the right to change any information without prior notice.

Notes

- 1 Other lumen packages available, consult factory.
- 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 3 Delivered lumen data shown for WG-100RPTDLWW-...-RWW-WWL-W. See Page 2 for specsheet for additional details.
- 4 See power supply page for details.
- 5 See Tiger Drylac color chart: inter-lux.com/tiger
- 6 Plaster trim version includes white frame and silver cover.




4" ProTools DLX Adjustable Square Recessed Cone

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
 - Regressed aperture / lens position provides good glare control.
 - Beam Angle: Various, Cut Off: 35°
 - Open aperture, clear lens or optical accessory lenses.
 - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 45°, rotation 365°, 144 step.
 - Wet Location option as standard (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

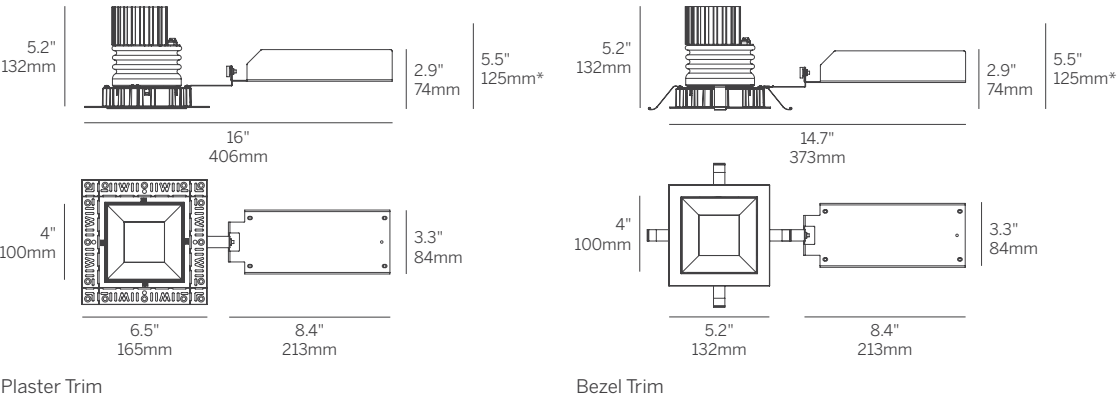

Recessed Plaster Trim



Recessed Bezel Trim

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable Square Recessed Cone

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SRC	OA MPL RSC	16 32 41	W S ⁷	LP CP IC WL

- Model**
- WG-100SPTDLX = 4" ProTools DLX Adjustable

- Fixation**
- RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim

- Power^{1,2}**
- L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³

- CRI/CCT⁴**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (552/766/1031/1445 lm)
 - 930 = 3000K, (594/824/1110/1555 lm)
 - 935 = 3500K, (594/824/1110/1555 lm)
 - 940 = 4000K, (636/883/1188/1664 lm)
 - TW = Tunable White 1800 - 4000K, (610-1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³

- Driver⁵**
- X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V

- Cover**
- SRC = Square Recessed Cone

- Lens**
- OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear

- Beam**
- 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle

- Finish⁶**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷

- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
 - WL = Wet Location (not available with open aperture)

- Optical Accessory Holder**
- Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder
- HX = Hex Louver
 - FG = Frosted Glass
 - LS = Linear Spread Lens
 - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for WG-100SPTDLX-...-SRC-OA-16-W. Refer to page 2 of specsheet for delivered lumen data for other product configurations. Source lumen data shown for TW and WD options.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.



4" ProTools DLX Adjustable Square Recessed Cone - Narrow

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
- Regressed aperture / lens position provides good glare control.
- 8 degree very narrow beam..
- Open aperture, clear lens or optical accessory lenses.
- No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 45°, rotation 365°, 144 step.
- Wet Location option as standard (WL).


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated



Recessed Plaster Trim



Recessed Bezel Trim

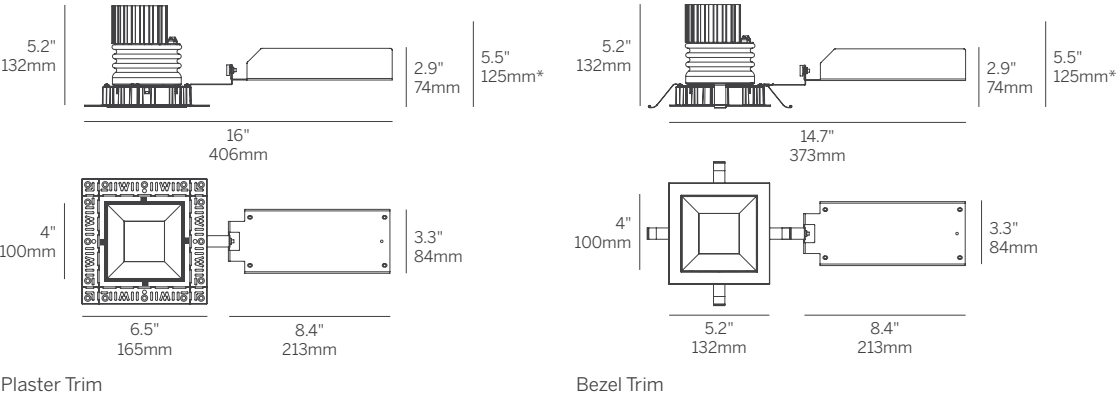

4" ProTools DLX Adjustable Square Recessed Cone - Narrow

Model	Fixation	Power ^{1,2}	CRI/CCT ³	Driver ⁴	Cover	Lens	Beam	Finish ⁵	Options
WG-100SPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ0 DFPN	SRC	OA MPL RSC	8 (Narrow)	W S ⁶	LP CP IC WL

Model <ul style="list-style-type: none">■ WG-100SPTDLX = 4" ProTools DLX Adjustable	Cover <ul style="list-style-type: none">■ SRC = Square Recessed Cone
Fixation <ul style="list-style-type: none">■ RPT = Recessed Plaster Trim■ RBT = Recessed Bezel Trim	Lens <ul style="list-style-type: none">■ OA = Open Aperture■ MPL = Micro-prismatic Lens■ RSC = Satin Clear
Power^{1,2} <ul style="list-style-type: none">■ L = Low Power, 4W @ 350mA■ M = Mid Power, 5.8W @ 500mA■ H = High Power, 8.4W @ 700mA■ XH = Extra High Power, 13W @ 1050mA	Beam <ul style="list-style-type: none">■ 8 = 8° Beam Angle (Narrow) (TIR Optic)
CRI/CCT³ <p>90+ CRI (Low/Mid/High/Extra High)</p> <ul style="list-style-type: none">■ 927 = 2700K, (360/480/630/850 lm)■ 930 = 3000K, (380/510/670/910 lm)■ 935 = 3500K, (380/510/670/910 lm)■ 940 = 4000K, (410/560/730/980 lm)	Finish⁵ <ul style="list-style-type: none">■ W = White, 15% gloss, Tiger Drylac 49/11350 (standard)■ S = Silver, 15% gloss, Tiger Drylac49/90500⁶
Driver⁴ <ul style="list-style-type: none">■ X = Remote driver, ordered separately■ S = Standard non-dim driver, 120-277V■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V■ DFPN = Lutron Forward Phase 1% 120VAC	Options <p>ProTools downlights require no additional options kits for remodel & new construction</p> <ul style="list-style-type: none">■ LP = Landing Pan (specify for Acoustic Ceiling Tile installation)■ CP = Chicago Plenum Housing■ IC = IC/NC Housing■ WL = Wet Location (not available with open aperture)
Optical Accessory Holder <p>Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder</p> <ul style="list-style-type: none">■ HX = Hex Louver■ FG = Frosted Glass■ LS = Linear Spread Lens■ SOL = Solite Lens	

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Source lumens shown.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.




4" ProTools DLX Adjustable

Square Recessed Cone - Adjustable Beam

Zoom Beam With Pan And Tilt Adjustment From
Regressed Source And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
- Regressed aperture / lens position provides good glare control.
- 13-48 degree zoom.
- Open aperture.
- No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 45°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	13-48 degree beam spreads (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

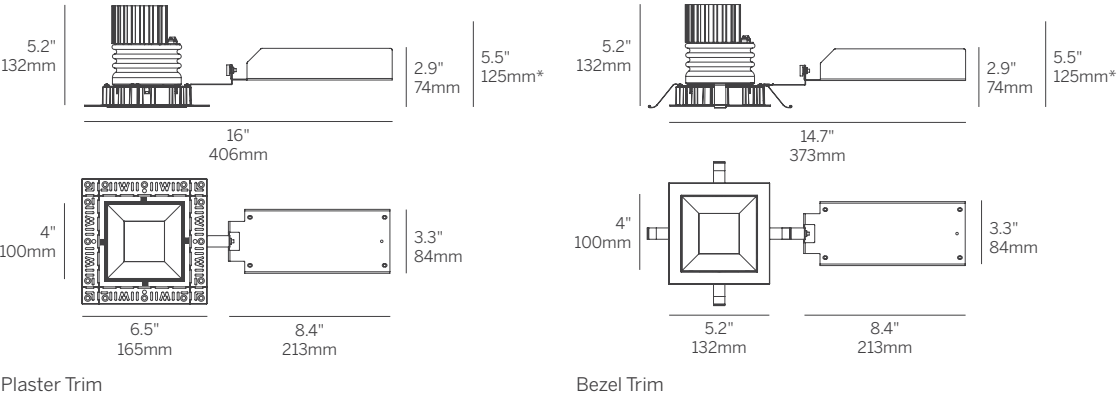

Recessed Plaster Trim



Recessed Bezel Trim

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable

Square Recessed Cone - Adjustable Beam

Model	Fixation	Power ^{1,2}	CRI/ CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SRC	OA	13-48 (Zoom)	W S ⁷	LP CP IC

- Model**
- WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**
- RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**
- L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (720/999/1344/1884 lm)
 - 930 = 3000K, (775/1075/1447/2027 lm)
 - 935 = 3500K, (775/1075/1447/2027 lm)
 - 940 = 4000K, (830/1151/1549/2171 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**
- X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**
- SRC = Square Recessed Cone
- Lens**
- OA = Open Aperture
- Beam**
- 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)
- Finish⁶**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Source lumens shown.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.



4" ProTools DLX Adjustable Round Recessed Cone

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
 - Regressed aperture / lens position provides good glare control.
 - Beam Angle: Various, Cut Off: 25°.
 - Open aperture, clear lens or optical accessory lenses.
 - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 45°, rotation 365°, 144 step.
 - Wet Location option as standard (WL).




Recessed Plaster Trim



Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

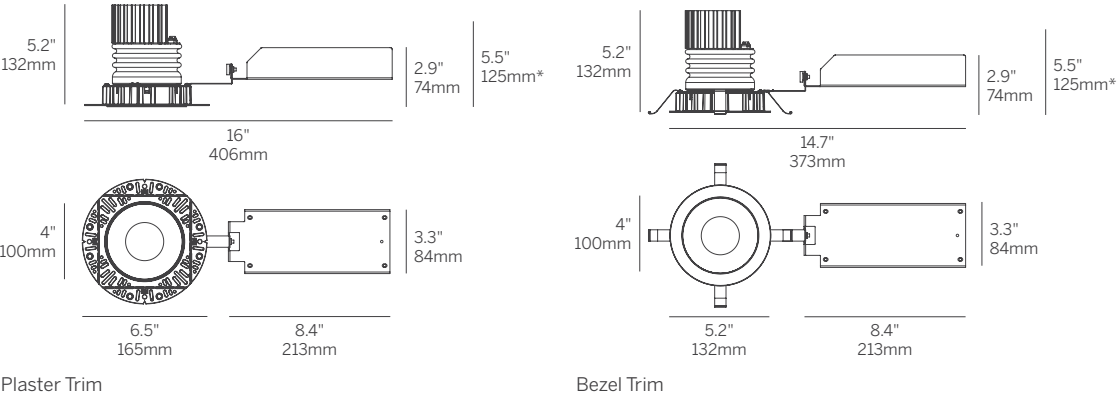

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable Round Recessed Cone

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RRC	OA MPL RSC	16 32 41	W S ⁷	LP CP IC WL

- Model**
- WG-100RPTDLX = 4" ProTools DLX Adjustable

- Fixation**
- RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim

- Power^{1,2}**
- L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³

- CRI/CCT⁴**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (492/683/919/1287 lm)
 - 930 = 3000K, (529/734/989/1385 lm)
 - 935 = 3500K, (529/734/989/1385 lm)
 - 940 = 4000K, (567/786/1058/1483 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³

- Driver⁵**
- X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V

- Cover**
- RRC = Round Recessed Cone

- Lens**
- OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear

- Beam**
- 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle

- Finish⁶**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷

- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
 - WL = Wet Location (not available with open aperture)

- Optical Accessory Holder**
- Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder
- HX = Hex Louver
 - FG = Frosted Glass
 - LS = Linear Spread Lens
 - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for WG-100RPTDLX-...-RRC-OA-16-W. Refer to page 2 of specsheet for delivered lumen data for other product configurations. Source lumen data shown for TW and WD options.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.



4" ProTools DLX Adjustable

Round Recessed Cone - Narrow

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
 - Regressed aperture / lens position provides good glare control.
 - 8 degree very narrow beam.
 - Open aperture, clear lens or optical accessory lenses.
 - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 45°, rotation 365°, 144 step.
 - Wet Location option as standard (WL).




Recessed Plaster Trim



Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

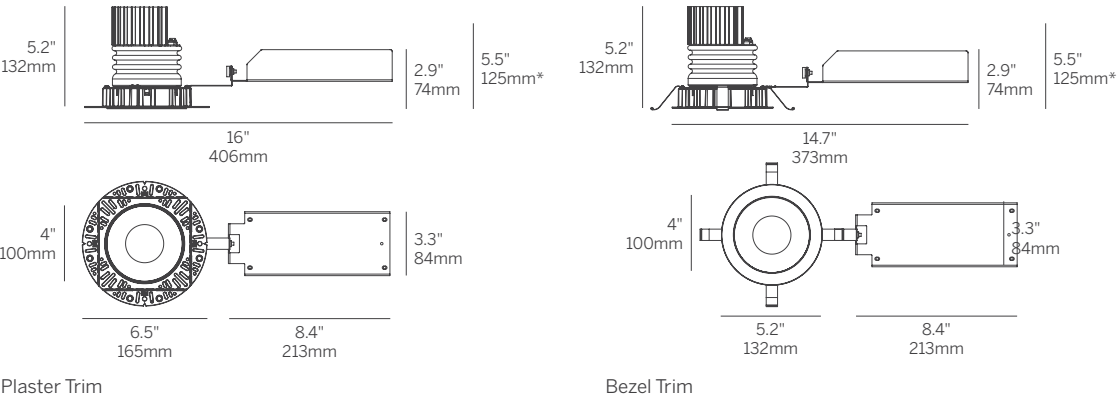

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable

Round Recessed Cone - Narrow

Model	Fixation	Power ^{1,2}	CRI/CCT ³	Driver ⁴	Cover	Lens	Beam	Finish ⁵	Options
WG-100RPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ0 DFPN	RRC	OA MPL RSC	8 (Narrow)	W S ⁶	LP CP IC WL

Model

- WG-100RPTDLX = 4" ProTools DLX Adjustable

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power^{1,2}

- L = Low Power, 4W @ 350mA
- M = Mid Power, 5.8W @ 500mA
- H = High Power, 8.4W @ 700mA
- XH = Extra High Power, 13W @ 1050mA

CRI/CCT³

90+ CRI (Low/Mid/High/Extra High)

- 927 = 2700K, (360/480/630/850 lm)
- 930 = 3000K, (380/510/670/910 lm)
- 935 = 3500K, (380/510/670/910 lm)
- 940 = 4000K, (410/560/730/980 lm)

Driver⁴

- X = Remote driver, ordered separately
- S = Standard non-dim driver, 120-277V
- D010 = EldoLED, 1%, 0-10V Driver, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC

Cover

- RRC = Round Recessed Cone

Lens

- OA = Open Aperture
- MPL = Micro-prismatic Lens
- RSC = Satin Clear

Beam

- 8 = 8° Beam Angle (Narrow) (TIR Optic)

Finish⁵

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac49/90500⁶

Options

ProTools downlights require no additional options kits for remodel & new construction

- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- CP = Chicago Plenum Housing
- IC = IC/NC Housing
- WL = Wet Location (not available with open aperture)

Optical Accessory Holder

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

- HX = Hex Louver
- FG = Frosted Glass
- LS = Linear Spread Lens
- SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Source lumens shown.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.




4" ProTools DLX Adjustable

Round Recessed Cone - Adjustable Beam

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
 - Regressed aperture / lens position provides good glare control.
 - 13-48 degree zoom.
 - Open aperture.
 - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 45°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round recessed cone - low brightness, general illumination
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	13-48 degree beam spreads (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

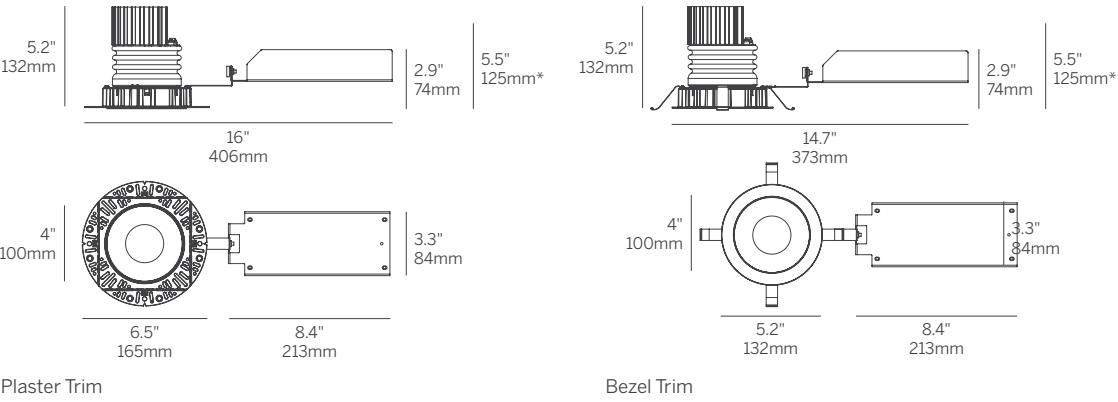

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable

Round Recessed Cone - Adjustable Beam

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD3	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RRC	OA	13-48 (Zoom)	W S ⁷	LP CP IC

- Model**

 - WG-100RPTDLX = 4" ProTools DLX Adjustable
- Fixation**

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**

 - L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**

90+ CRI (Low/Mid/High/Extra High)

 - 927 = 2700K, (720/999/1344/1884 lm)
 - 930 = 3000K, (775/1075/1447/2027 lm)
 - 935 = 3500K, (775/1075/1447/2027 lm)
 - 940 = 4000K, (830/1151/1549/2171 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**

 - RRC = Round Recessed Cone
- Lens**

 - OA = Open Aperture
- Beam**

 - 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)
- Finish⁶**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Source lumens shown..
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 5 Plaster trim version includes white frame and gray cover.




4" ProTools DLX Adjustable Square Regressed Pinhole

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
 - Regressed aperture / lens position provides good glare control.
 - Beam Angle: Various, Cut Off: 35°.
 - Open aperture, clear lens or optical accessory lenses.
 - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 45°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

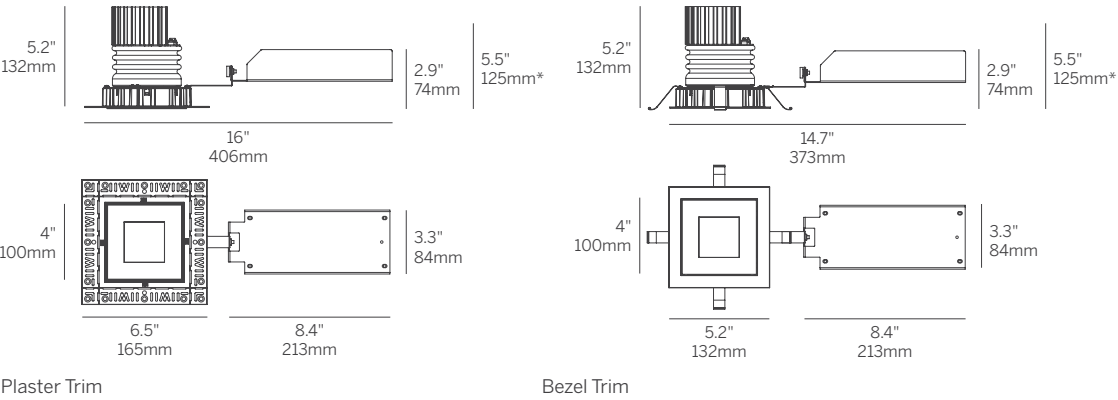

Recessed Plaster Trim



Recessed Bezel Trim

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable Square Regressed Pinhole

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁵	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SRP	OA MPL RSC	16 32 41	W S ⁷	LP CP IC

- Model**

 - WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**

 - L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**

90+ CRI (Low/Mid/High/Extra High)

 - 927 = 2700K, (494/686/923/1293 lm)
 - 930 = 3000K, (532/738/993/1391 lm)
 - 935 = 3500K, (532/738/993/1391 lm)
 - 940 = 4000K, (569/790/1063/1489 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**

 - SRP = Square Regressed Pinhole
- Lens**

 - OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**

 - 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle
- Finish⁶**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

 - HX = Hex Louver
 - FG = Frosted Glass
 - LS = Linear Spread Lens
 - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for WG-100SPTDLX-...-SRP-OA-16-W. Refer to page 2 of specsheet for delivered lumen datafor other product configurations. Source lumen data shown for TW and WD options.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 5 Plaster trim version includes white frame and gray cover.



4" ProTools DLX Adjustable

Square Regressed Pinhole - Narrow

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
 - Regressed aperture / lens position provides good glare control.
 - 8 degree very narrow beam.
 - Open aperture, clear lens or optical accessory lenses.
 - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 45°, rotation 365°, 144 step.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE



Recessed Plaster Trim



Recessed Bezel Trim

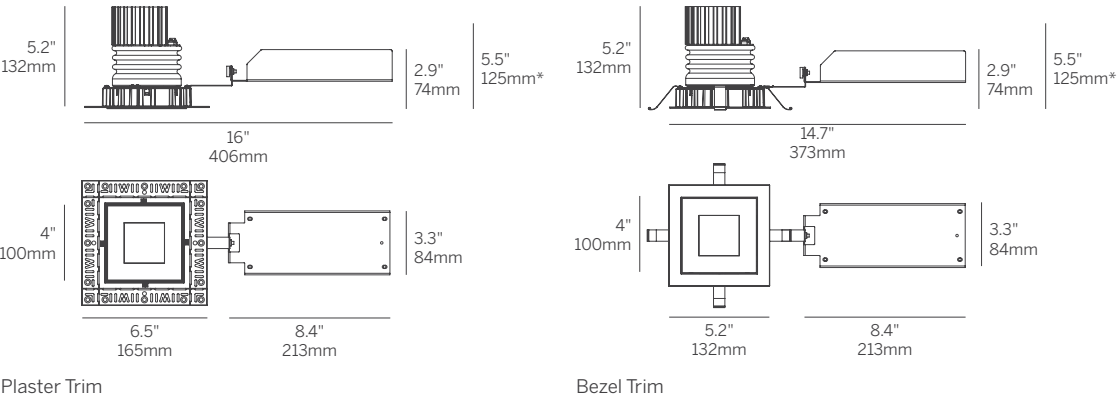

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable

Square Regressed Pinhole - Narrow

Model	Fixation	Power ^{1,2}	CRI/CCT ³	Driver ⁴	Cover	Lens	Beam	Finish ⁵	Options
WG-100SPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ0 DFPN	SRP	OA MPL RSC	8 (Narrow)	W S ⁶	LP CP IC

- Model**

 - WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**

 - L = Low Power, 4W @ 350mA
 - M = Mid Power, 5.8W @ 500mA
 - H = High Power, 8.4W @ 700mA
 - XH = Extra High Power, 13W @ 1050mA
- CRI/CCT³**

90+ CRI (Low/Mid/High/Extra High)

 - 927 = 2700K, (360/480/630/850 lm)
 - 930 = 3000K, (380/510/670/910 lm)
 - 935 = 3500K, (380/510/670/910 lm)
 - 940 = 4000K, (410/560/730/980 lm)
- Driver⁴**

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**

 - SRP = Square Recessed Pinhole
- Lens**

 - OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**

 - 8 = 8° Beam Angle (Narrow) (TIR Optic)
- Finish⁵**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁶
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
- Optical Accessory Holder**

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

 - HX = Hex Louver
 - FG = Frosted Glass
 - LS = Linear Spread Lens
 - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Source lumens shown.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 5 Plaster trim version includes white frame and gray cover.


4" ProTools DLX Adjustable

Square Regressed Pinhole - Adjustable Beam

Zoom Beam With Pan And Tilt Adjustment From
Regressed Source And Ceiling Void Light Leak Hood

- 4" square downlight with 2" light aperture.
 - Regressed aperture / lens position provides good glare control.
 - 13-48 degree zoom.
 - Open aperture.
 - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 45°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	13-48 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

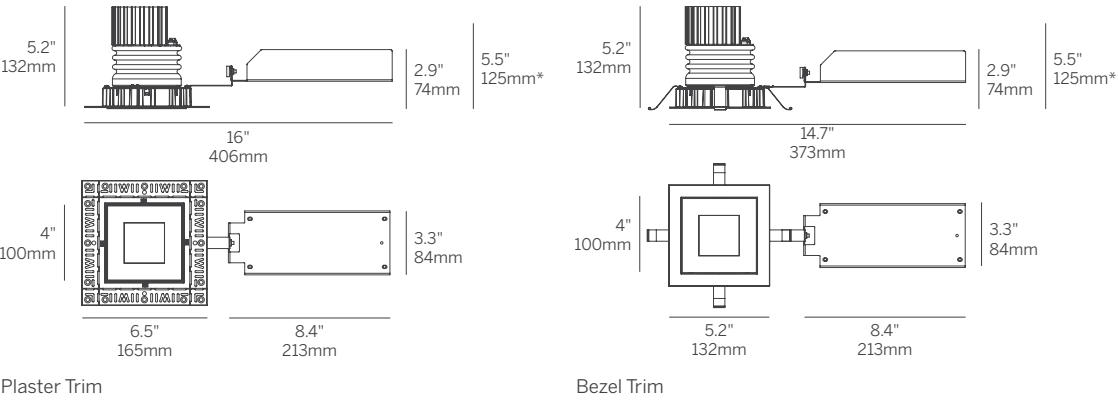

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161



Recessed Plaster Trim



Recessed Bezel Trim

4" ProTools DLX Adjustable

Square Regressed Pinhole - Adjustable Beam

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SRP	OA	13-48 (Zoom)	W S ⁷	LP CP IC

- Model**

 - WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**

 - L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**

90+ CRI (Low/Mid/High/Extra High)

 - 927 = 2700K, (720/999/1344/1884 lm)
 - 930 = 3000K, (775/1075/1447/2027 lm)
 - 935 = 3500K, (775/1075/1447/2027 lm)
 - 940 = 4000K, (830/1151/1549/2171 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**

 - SRP = Square Recessed Pinhole
- Lens**

 - OA = Open Aperture
- Beam**

 - 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)
- Finish⁶**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Source lumens shown.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.




4" ProTools DLX Adjustable Round Regressed Pinhole

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
- Regressed aperture / lens position provides good glare control.
- Beam Angle: Various, Cut Off: 30°.
- Open aperture, clear lens or optical accessory lenses.
- No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 45°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

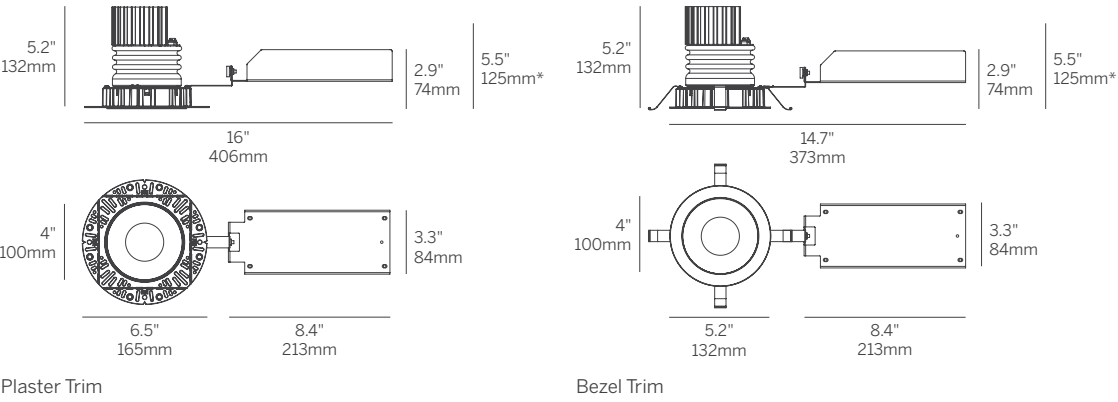

Recessed Plaster Trim



Recessed Bezel Trim

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable Round Regressed Pinhole

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁵	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RRP	OA MPL RSC	16 32 41	W S ⁷	LP CP IC

- Model**
- WG-100RPTDLX = 4" ProTools DLX Adjustable
- Fixation**
- RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**
- L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (492/683/919/1287 lm)
 - 930 = 3000K, (529/734/989/1385 lm)
 - 935 = 3500K, (529/734/989/1385 lm)
 - 940 = 4000K, (567/786/1058/1483 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**
- X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**
- RRP = Round Regressed Pinhole
- Lens**
- OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**
- 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle
- Finish⁶**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
- Optical Accessory Holder**
- Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder
- HX = Hex Louver
 - FG = Frosted Glass
 - LS = Linear Spread Lens
 - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for WG-100RPTDLX-...-RRP-OA-16-W. Refer to page 2 of specsheet for delivered lumen data for other product configurations. Source lumen data shown for TW and WD options.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.



4" ProTools DLX Adjustable

Round Regressed Pinhole - Narrow

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
- Regressed aperture / lens position provides good glare control.
- 8 degree very narrow beam.
- Open aperture, clear lens or optical accessory lenses.
- No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 45°, rotation 365°, 144 step.


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE



Recessed Plaster Trim



Recessed Bezel Trim

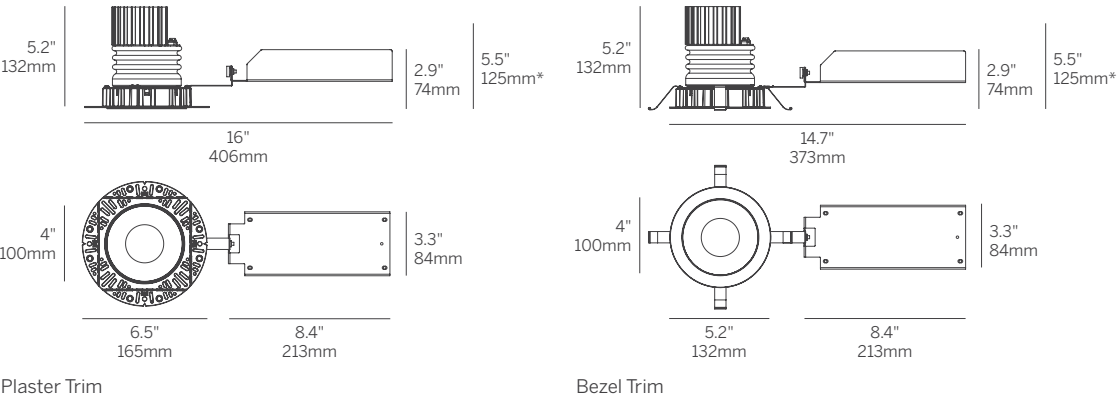

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable

Round Regressed Pinhole - Narrow

Model	Fixation	Power ^{1,2}	CRI/ CCT ³	Driver ⁴	Cover	Lens	Beam	Finish ⁵	Options
WG-100RPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ0 DFPN	RRP	OA MPL RSC	8 (Narrow)	W S ⁶	LP CP IC

- Model**
- WG-100RPTDLX = 4" ProTools DLX Adjustable
- Fixation**
- RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**
- L = Low Power, 4W @ 350mA
 - M = Mid Power, 5.8W @ 500mA
 - H = High Power, 8.4W @ 700mA
 - XH = Extra High Power, 13W @ 1050mA
- CRI/CCT³**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (360/480/630/850 lm)
 - 930 = 3000K, (380/510/670/910 lm)
 - 935 = 3500K, (380/510/670/910 lm)
 - 940 = 4000K, (410/560/730/980 lm)
- Driver⁴**
- X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**
- RRP = Round Regressed Pinhole
- Lens**
- OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**
- 8 = 8° Beam Angle (Narrow) (TIR Optic)
- Finish⁵**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁶
- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
- Optical Accessory Holder**
- Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder
- HX = Hex Louver
 - FG = Frosted Glass
 - LS = Linear Spread Lens
 - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Source lumens shown.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.


4" ProTools DLX Adjustable

Round Regressed Pinhole - Adjustable Beam

Full Featured With Accessory Holder And Ceiling Void Light Leak Hood

- 4" round downlight with 2" light aperture.
 - Regressed aperture / lens position provides good glare control.
 - 13-48 degree zoom.
 - Open aperture.
 - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 45°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round regressed pinhole - smallest apperture, maximum glare control
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	13-48 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

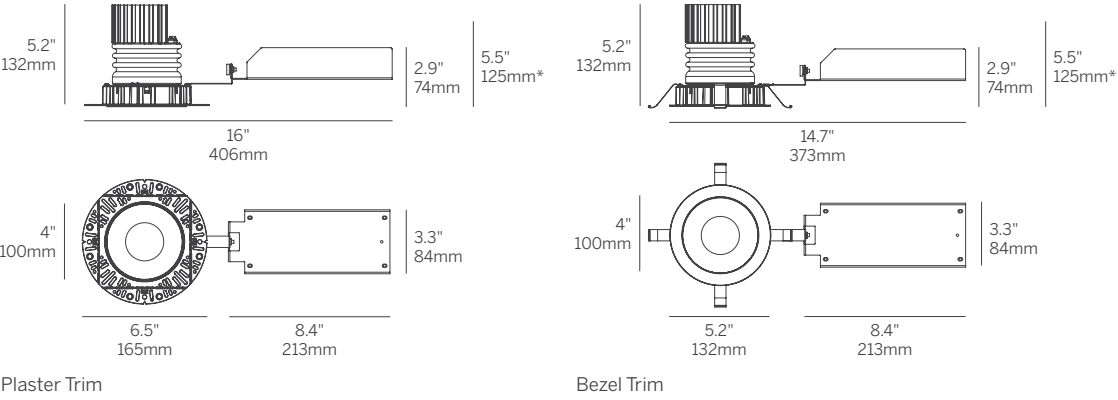

Recessed Plaster Trim



Recessed Bezel Trim



4" ProTools DLX Adjustable

Round Regressed Pinhole - Adjustable Beam

Model	Fixation	Power ^{1,2}	CRI/ CCT ^{3,4}	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RRP	OA	13-48 (Zoom)	W S ⁷	LP CP IC

Model <ul style="list-style-type: none">■ WG-100RPTDLX = 4" ProTools DLX Adjustable	Cover <ul style="list-style-type: none">■ RRP = Round Regressed Pinhole
Fixation <ul style="list-style-type: none">■ RPT = Recessed Plaster Trim■ RBT = Recessed Bezel Trim	Lens <ul style="list-style-type: none">■ OA = Open Aperture
Power^{1,2} <ul style="list-style-type: none">■ L = Low Power, 5.7W @ 350mA■ M = Mid Power, 8.4W @ 500mA■ H = High Power, 12W @ 700mA■ XH = Extra High Power, 17.8W @ 1050mA■ TW = 9W @ 500mA■ WD = 0.4 - 11.8W @ 350mA³	Beam <ul style="list-style-type: none">■ 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)
CRI/CCT⁴ <p>90+ CRI (Low/Mid/High/Extra High)</p> <ul style="list-style-type: none">■ 927 = 2700K, (720/999/1344/1884 lm)■ 930 = 3000K, (775/1075/1447/2027 lm)■ 935 = 3500K, (775/1075/1447/2027 lm)■ 940 = 4000K, (830/1151/1549/2171 lm)■ TW = Tunable White 1800 - 4000K, (610 - 1060 lm)■ WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³	Finish⁶ <ul style="list-style-type: none">■ W = White, 15% gloss, Tiger Drylac 49/11350 (standard)■ S = Silver, 15% gloss, Tiger Drylac49/90500⁷
Driver⁵ <ul style="list-style-type: none">■ X = Remote driver, ordered separately■ S = Standard non-dim driver, 120-277V■ D010 = EldoLED, 1%, 0-10V Driver, 120-277V■ PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V■ DFPN = Lutron Forward Phase 1% 120VAC■ TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V	Options <p>ProTools downlights require no additional options kits for remodel & new construction</p> <ul style="list-style-type: none">■ LP = Landing Pan (specify for Acoustic Ceiling Tile installation)■ CP = Chicago Plenum Housing■ IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Source lumens shown.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.




4" ProTools DLX Adjustable Square Asymmetric Cone

Asymmetric Cover For Minimum Beam Clipping
With Wider Angle Optics And Higher Angle Focusing

- 4" square downlight with 2" light aperture.
- Regressed aperture / lens position provides good glare control.
- Beam Angle: Various
- Open aperture, clear lens or optical accessory lenses.
- No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 35°, rotation 365°, 144 step.
- Wet Location option as standard (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

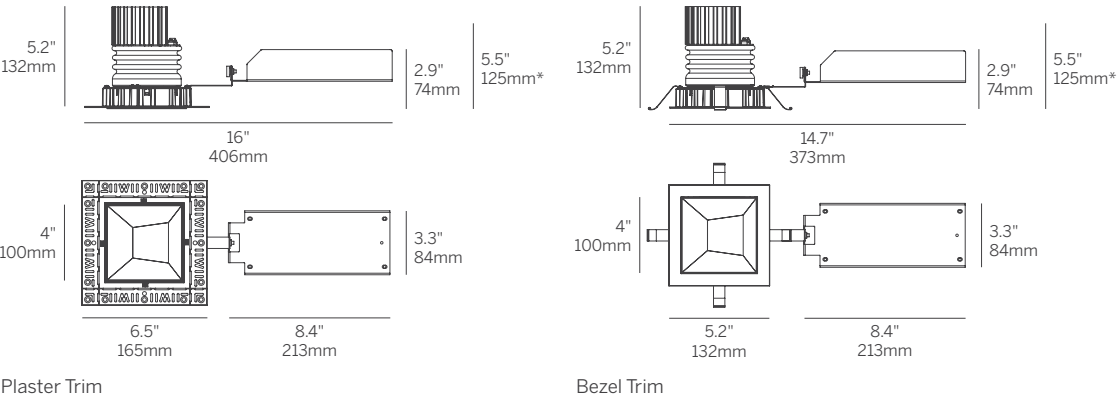

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable Square Asymmetric Cone

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁵	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SAC	OA MPL RSC	16 32 41	W S ⁷	LP CP IC WL

- Model**
- WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**
- RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**
- L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (447/620/834/1169 lm)
 - 930 = 3000K, (481/667/898/1258 lm)
 - 935 = 3500K, (481/667/898/1258 lm)
 - 940 = 4000K, (515/714/961/1347 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**
- X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**
- SAC = Square Asymmetric Cone
- Lens**
- OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**
- 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle
- Finish⁶**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
 - WL = Wet Location (not available with open aperture)
- Optical Accessory Holder**
- Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder
- HX = Hex Louver
 - FG = Frosted Glass
 - LS = Linear Spread Lens
 - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for WG-100SPTDLX-...-SAC-OA-16-W. Refer to page 2 of specsheet for delivered lumen data for other product configurations. Source lumen data shown for TW and WD options.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.



4" ProTools DLX Adjustable

Square Asymmetric Cone - Narrow

Asymmetric Cover For Minimum Beam Clipping
With Wider Angle Optics And Higher Angle Focusing

- 4" square downlight with 2" light aperture.
- Regressed aperture / lens position provides good glare control.
- 8 degree very narrow beam.
- Open aperture, clear lens or optical accessory lenses.
- No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 35°, rotation 365°, 144 step.
- Wet Location option as standard (WL).


Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated



Recessed Plaster Trim



Recessed Bezel Trim

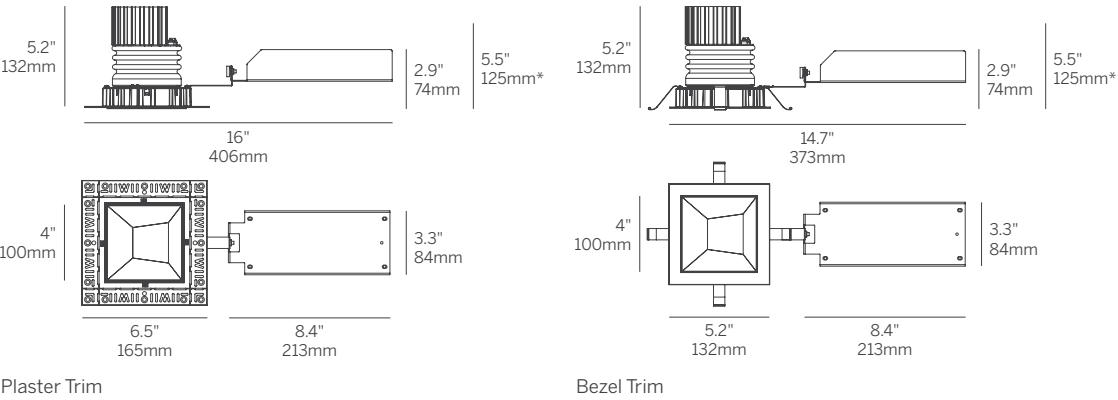

4" ProTools DLX Adjustable

Square Asymmetric Cone - Narrow

Model	Fixation	Power ^{1,2}	CRI/ CCT ³	Driver ⁴	Cover	Lens	Beam	Finish ⁵	Options
WG-100SPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ0 DFPN	SAC	OA MPL RSC	8 (Narrow)	W S ⁶	LP CP IC WL

- Model**
- WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**
- RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**
- L = Low Power, 4W @ 350mA
 - M = Mid Power, 5.8W @ 500mA
 - H = High Power, 8.4W @ 700mA
 - XH = Extra High Power, 13W @ 1050mA
- CRI/CCT³**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (360/480/630/850 lm)
 - 930 = 3000K, (380/510/670/910 lm)
 - 935 = 3500K, (380/510/670/910 lm)
 - 940 = 4000K, (410/560/730/980 lm)
- Driver⁴**
- X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**
- SAC = Square Asymmetric Cone
- Lens**
- OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**
- 8 = 8° Beam Angle (Narrow) (TIR Optic)
- Finish⁵**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁶
- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
 - WL = Wet Location (not available with open aperture)
- Optical Accessory Holder**
- Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder
- HX = Hex Louver
 - FG = Frosted Glass
 - LS = Linear Spread Lens
 - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Source lumens shown.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.




4" ProTools DLX Adjustable

Square Asymmetric Cone - Adjustable Beam

Asymmetric Cover For Minimum Beam Clipping
With Wider Angle Optics And Higher Angle Focusing

- 4" square downlight with 2" light aperture.
 - Regressed aperture / lens position provides good glare control.
 - 13-48 degree zoom.
 - Open aperture.
 - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 35°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	13-48 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

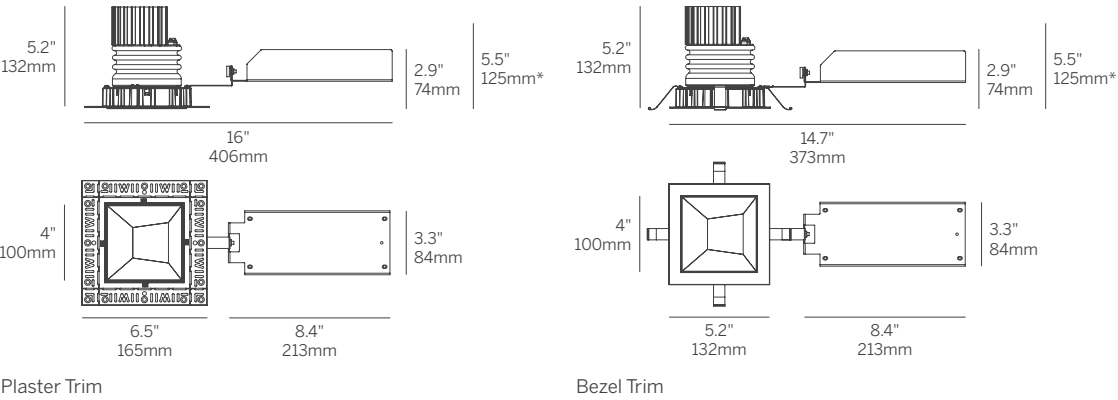

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161



Recessed Plaster Trim



Recessed Bezel Trim

4" ProTools DLX Adjustable

Square Asymmetric Cone - Adjustable Beam

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100SPTDLX	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	SAC	OA	13-48 (Zoom)	W S ⁷	LP CP IC

Model

- WG-100SPTDLX = 4" ProTools DLX Adjustable

Fixation

- RPT = Recessed Plaster Trim
- RBT = Recessed Bezel Trim

Power^{1,2}

- L = Low Power, 5.7W @ 350mA
- M = Mid Power, 8.4W @ 500mA
- H = High Power, 12W @ 700mA
- XH = Extra High Power, 17.8W @ 1050mA
- TW = 9W @ 500mA
- WD = 0.4 - 11.8W @ 350mA³

CRI/CCT⁴

- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (720/999/1344/1884 lm)
 - 930 = 3000K, (775/1075/1447/2027 lm)
 - 935 = 3500K, (775/1075/1447/2027 lm)
 - 940 = 4000K, (830/1151/1549/2171 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³

Driver⁵

- X = Remote driver, ordered separately
- S = Standard non-dim driver, 120-277V
- D010 = EldoLED, 1%, 0-10V Driver, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1% 120VAC
- TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V

Cover

- SAC = Square Asymmetric Cone

Lens

- OA = Open Aperture

Beam

- 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)

Finish⁶

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac49/90500⁷

Options

ProTools downlights require no additional options kits for remodel & new construction

- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- CP = Chicago Plenum Housing
- IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

Notes

- 1 Other lumen packages available, consult factory.
- 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 3 Source lumens shown.
- 4 See power supply page for details.
- 5 See Tiger Drylac color chart: inter-lux.com/tiger
- 5 Plaster trim version includes white frame and gray cover.




4" ProTools DLX Adjustable Round Asymmetric Cone


Asymmetric Cover For Minimum Beam Clipping With Wider Angle Optics And Higher Angle Focusing

- 4" round downlight with 2" light aperture.
- Regressed aperture / lens position provides good glare control.
- Beam Angle: Various
- Open aperture, clear lens or optical accessory lenses.
- No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
- Mounts in 1/16" to 1" surface.
- Tunable White and Warm Dim.
- Modular interchangeability throughout the entire ProTools range of products.
- Tilt 35°, Rotation 365°, 144 step.
- Wet Location option as standard (WL).

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	16, 32 and 41 degree beam spreads
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

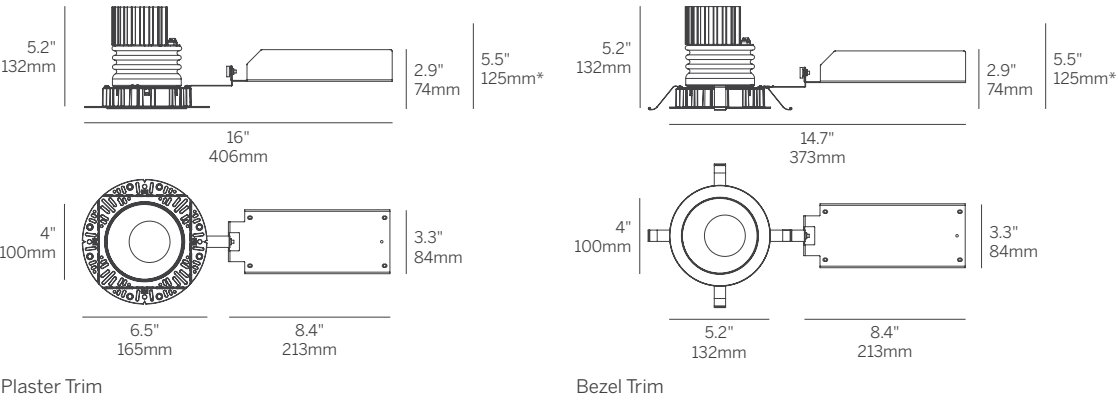

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide 154-161



Recessed Plaster Trim



Recessed Bezel Trim

4" ProTools DLX Adjustable Round Asymmetric Cone

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁵	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RAC	OA MPL RSC	16 32 41	W S ⁷	LP CP IC WL

- Model**
- WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**
- RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**
- L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**
- 90+ CRI (Low/Mid/High/Extra High)
- 927 = 2700K, (501/695/936/1311 lm)
 - 930 = 3000K, (539/748/1007/1410 lm)
 - 935 = 3500K, (539/748/1007/1410 lm)
 - 940 = 4000K, (577/801/1078/1510 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**
- X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**
- RAC = Round Asymmetric Cone
- Lens**
- OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear
- Beam**
- 16 = 16° Beam Angle
 - 32 = 32° Beam Angle
 - 41 = 41° Beam Angle
- Finish⁶**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**
- ProTools downlights require no additional options kits for remodel & new construction
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
 - WL = Wet Location (not available with open aperture)
- Optical Accessory Holder**
- Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder
- HX = Hex Louver
 - FG = Frosted Glass
 - LS = Linear Spread Lens
 - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Delivered lumen data shown for WG-100RPTDLX-...-RAC-OA-16-W. Refer to page 2 of specsheet for delivered lumen data for other product configurations. Source lumen data shown for TW and WD options.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 5 Plaster trim version includes white frame and gray cover.



4" ProTools DLX Adjustable

Round Asymmetric Cone - Narrow

Asymmetric Cover For Minimum Beam Clipping
With Wider Angle Optics And Higher Angle Focusing

- 4" round downlight with 2" light aperture.
 - Regressed aperture / lens position provides good glare control.
 - 8 degree very narrow beam.
 - Open aperture, clear lens or optical accessory lenses.
 - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 35°, rotation 365°, 144 step.
 - Wet Location option as standard (WL).




Recessed Plaster Trim



Recessed Bezel Trim

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K
Beam	8 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

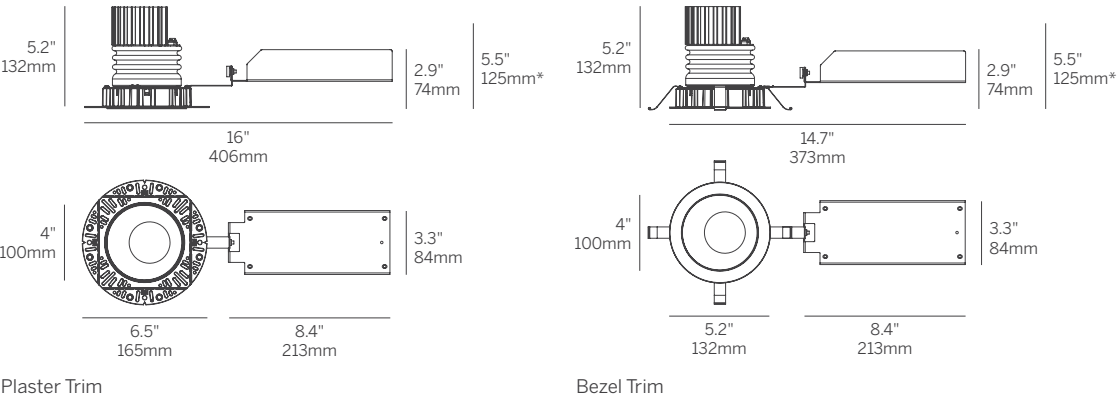

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable

Round Asymmetric Cone - Narrow

Model	Fixation	Power ^{1,2}	CRI/CCT ³	Driver ⁴	Cover	Lens	Beam	Finish ⁵	Options
WG-100RPTDLX	RPT RBT	L M H XH	927 930 935 940	X S D010 PEQ0 DFPN	RAC	OA MPL RSC	8 (Narrow)	W S ⁶	LP CP IC WL

- Model**

 - WG-100SPTDLX = 4" ProTools DLX Adjustable

Fixation

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim

Power^{1,2}

 - L = Low Power, 4W @ 350mA
 - M = Mid Power, 5.8W @ 500mA
 - H = High Power, 8.4W @ 700mA
 - XH = Extra High Power, 13W @ 1050mA

CRI/CCT³

90+ CRI (Low/Mid/High/Extra High)

 - 927 = 2700K, (360/480/630/850 lm)
 - 930 = 3000K, (380/510/670/910 lm)
 - 935 = 3500K, (380/510/670/910 lm)
 - 940 = 4000K, (410/560/730/980 lm)

Driver⁴

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
- Cover**

 - RAC = Round Asymmetric Cone

Lens

 - OA = Open Aperture
 - MPL = Micro-prismatic Lens
 - RSC = Satin Clear

Beam

 - 8 = 8° Beam Angle (Narrow) (TIR Optic)

Finish⁵

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁶

Options

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing
 - WL = Wet Location (not available with open aperture)

Optical Accessory Holder

Up to 3 lenses and/or accessories can be added to the Optical Accessory Holder

 - HX = Hex Louver
 - FG = Frosted Glass
 - LS = Linear Spread Lens
 - SOL = Solite Lens

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Source lumens shown.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.




4" ProTools DLX Adjustable

Round Asymmetric Cone - Adjustable Beam

Asymmetric Cover For Minimum Beam Clipping
With Wider Angle Optics And Higher Angle Focusing

- 4" round downlight with 2" light aperture.
 - Regressed aperture / lens position provides good glare control.
 - 13-48 degree zoom.
 - Open aperture.
 - No light leak or view into ceiling void from below due to a unique light leak hood.
- Luminaire and driver installed and maintained from below the ceiling.
 - Mounts in 1/16" to 1" surface.
 - Tunable White and Warm Dim.
 - Modular interchangeability throughout the entire ProTools range of products.
 - Tilt 35°, rotation 365°, 144 step.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless EZ clip mounting for secure installation Snap-in cover Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round asymmetric cone with minimal ceiling interruption
LED	90+ CRI Low/Mid/High/Extra High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800K - 4000K Warm Dim from 1800 - 3000K
Beam	13-48 degree beam spread (TIR Optic)
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: new construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE

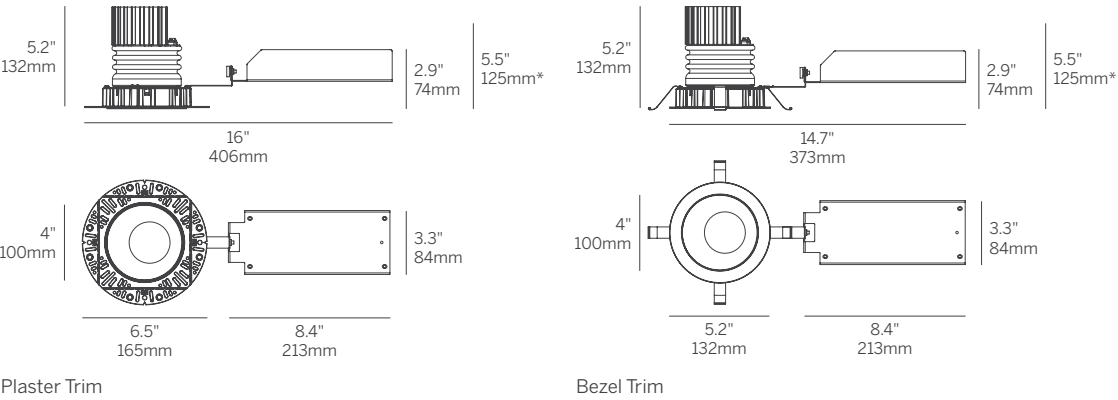

Recessed Plaster Trim



Recessed Bezel Trim

*Minimum of 5.5" (127mm) ceiling void is required to install the integral driver from below the ceiling.



Design Guide
154-161

4" ProTools DLX Adjustable

Round Asymmetric Cone - Adjustable Beam

Model	Fixation	Power ^{1,2}	CRI/CCT ⁴	Driver ⁵	Cover	Lens	Beam	Finish ⁶	Options
WG-100RPTDLX	RPT RBT	L M H XH TW WD ³	927 930 935 940 TW WD ³	X S D010 PEQ0 DFPN TW	RAC	OA	13-48 (Zoom)	W S ⁷	LP CP IC WL

- Model**

 - WG-100SPTDLX = 4" ProTools DLX Adjustable
- Fixation**

 - RPT = Recessed Plaster Trim
 - RBT = Recessed Bezel Trim
- Power^{1,2}**

 - L = Low Power, 5.7W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
 - XH = Extra High Power, 17.8W @ 1050mA
 - TW = 9W @ 500mA
 - WD = 0.4 - 11.8W @ 350mA³
- CRI/CCT⁴**

90+ CRI (Low/Mid/High/Extra High)

 - 927 = 2700K, (720/999/1344/1884 lm)
 - 930 = 3000K, (775/1075/1447/2027 lm)
 - 935 = 3500K, (775/1075/1447/2027 lm)
 - 940 = 4000K, (830/1151/1549/2171 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)³
- Driver⁵**

 - X = Remote driver, ordered separately
 - S = Standard non-dim driver, 120-277V
 - D010 = EldoLED, 1%, 0-10V Driver, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1% 120VAC
 - TW = EldoLED, 0.1%, DALI dimming (TW), 120-277V
- Cover**

 - RAC = Round Asymmetric Cone
- Lens**

 - OA = Open Aperture
- Beam**

 - 13-48 = 13-48° Beam Angle (Zoom) (TIR Optic)
- Finish⁶**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac49/90500⁷
- Options**

ProTools downlights require no additional options kits for remodel & new construction

 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - CP = Chicago Plenum Housing
 - IC = IC/NC Housing

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Other lumen packages available, consult factory.
 - 2 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 3 Source lumens shown.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger
 - 6 Plaster trim version includes white frame and gray cover.

3" ProTools Downlights

The 3" ProTools downlights family offers trimless and trim, round or square, ambient light, or adjustable, wall washers, ultimate performance, superb glare control, lens options and the Whitegoods attention to integration with surrounding materials.

- Downlight
- Wall Wash
- Adjustable
- Wet Location

Application guide
Product details


28-29
120-139






3" ProTools Range Logic

The ProTools range allows the specifier freedom to design for all spaces and environments within a project from one succinct, logical and aesthetically congruent range of luminaires. The comprehensive options cover all of the designer's needs.

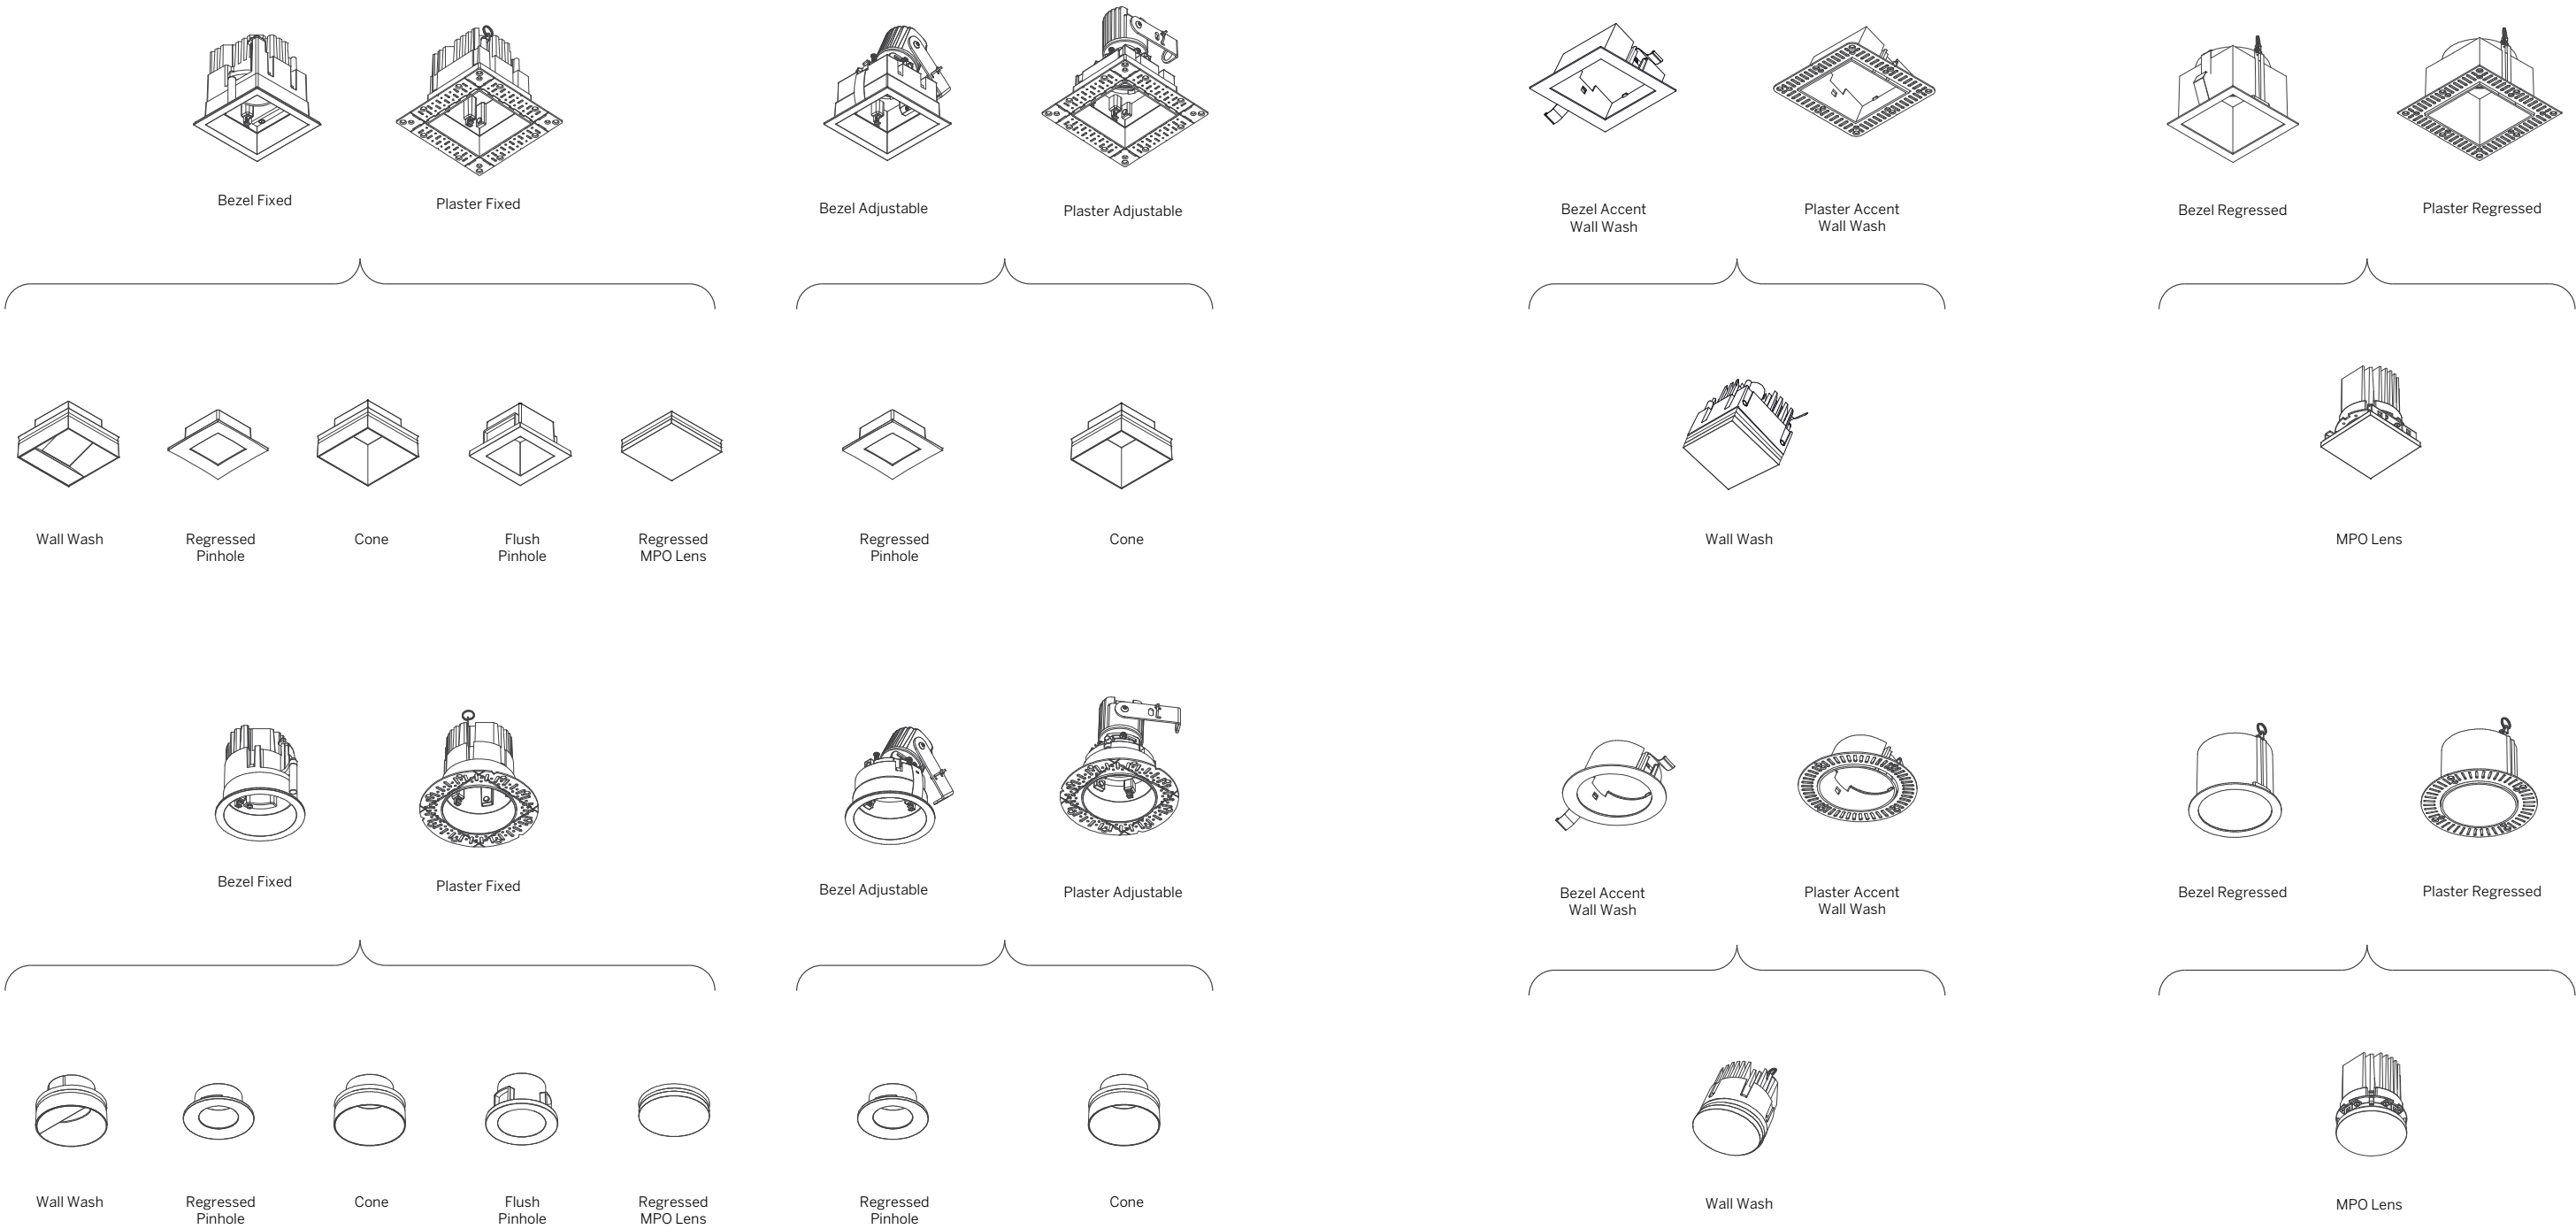


index


3" ProTools ease of Installation

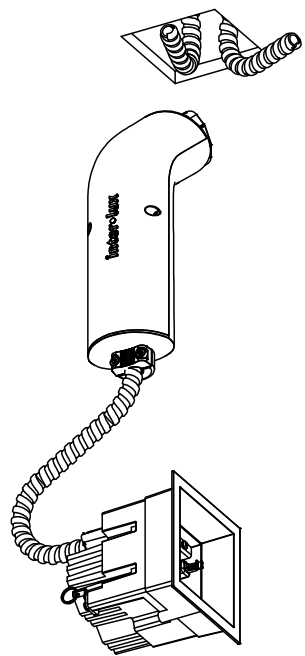


Pull power cable and control cable through the ceiling opening.

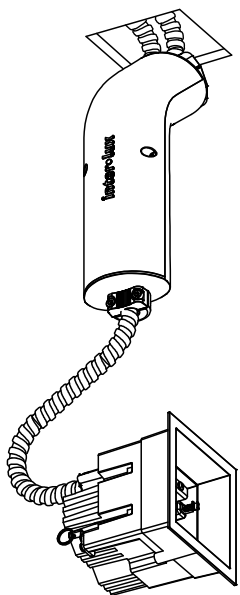


Insert the driver housing into the ceiling opening.

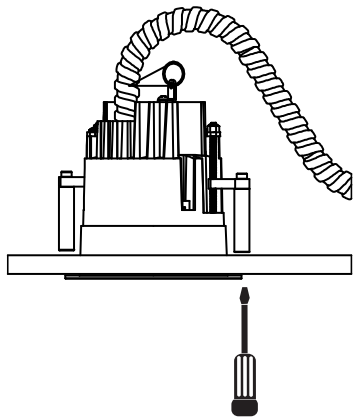

Screw the 2 philips head screws clockwise to engage the ceiling brackets.



Cover should be inserted by level alignment so the (4) Push Latches engage and hold the Cover into place.





Install using 'tape-and-joint' method, or plaster finish. Clean excess plaster while still wet.

3" ProTools Multiple Luminaire Configurations

Multiple fixture configurations can be accomplished using standard plaster-trim Downlight Frames.

With ProTools 3" Downlights you never have to purchase a specialized housing in order to realize a multiple configuration. In fact, you can simply snap off segments of the plaster-trim on standard product and field join the Frames during installation.


You simply specify the standard product.

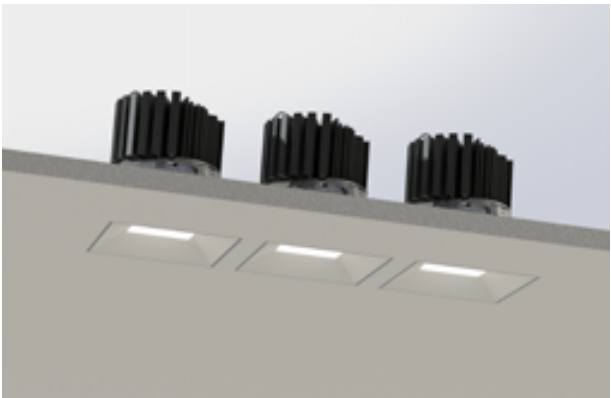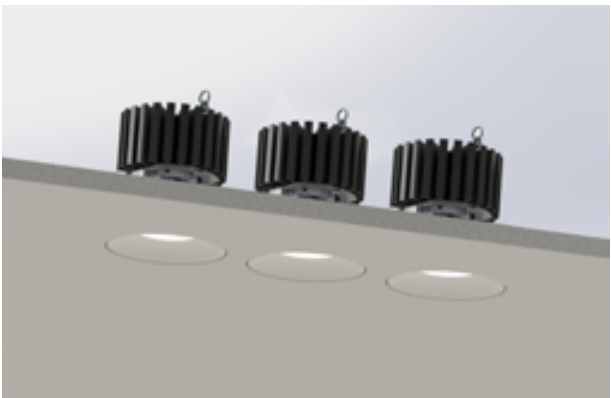


- 1 Select which side of the plaster trim to remove.




- 2 Use a pair of multi-grip pliers and firmly snap off the trim with one swift movement.




- 3 Installation frames can now be fixed directly next to one another...



- 4 ...to create "multiple" configurations, which would usually require additional dedicated housings.





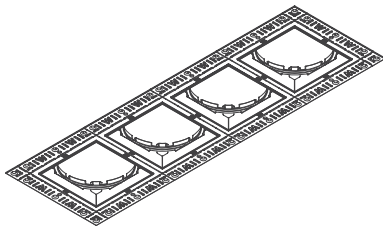

- 5 Any number of frames can be grouped together to form linear configurations.





3" ProTools Downlights





Fixed Downlights

	3" ProTools Downlight Square Recessed Cone Product details	120
	3" ProTools Downlight Round Recessed Cone Product details	122
	3" ProTools Downlight Square Regressed Lens Product details	124
	3" ProTools Downlight Round Regressed Lens Product details	126

Adjustable Downlights

	3" ProTools Adjustable Square Recessed Product details	132
	3" ProTools Adjustable Round Recessed Product details	134

Wall Wash


	3" ProTools Wall Wash Square Recessed Product details	128
	3" ProTools Wall Wash Round Recessed Product details	130
	3" ProTools Accent Wall Wash Square Recessed Product details	136
	3" ProTools Accent Wall Wash Round Recessed Product details	138

3” ProTools Downlight

Square Recessed

- Part of a complete family of 3” aperture matching downlights.
 - Small aperture, low brightness downlight for general and accent illumination.
 - High lumen output and excellent color rendition for all applications.
 - Installs from below the ceiling for new and retrofit installations.
 - Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
 - Tunable White and Warm Dim.
 - Quick-Snap feature for field-configurable multiple combinations.
 - EZ-Click Cover installation makes installing or changing Covers easy in the field.
 - Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Square recessed cone - low brightness, general illumination Flush pinhole - smallest apperture, maximum glare control Regressed pinhole - smallest apperture, maximum glare control Micro-prismatic opal - regressed, evenly diffuse lens for wide distribution
LED	92CRI, 98CRI, 90CRI and 95CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800 - 4000K Warm Dim from 1800 - 3000K
Optics	Micro-prismatic opal for wide, even illumination 20, 30, 50, 80 degree symmetrical beam spreads optional regressed diffused lens
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

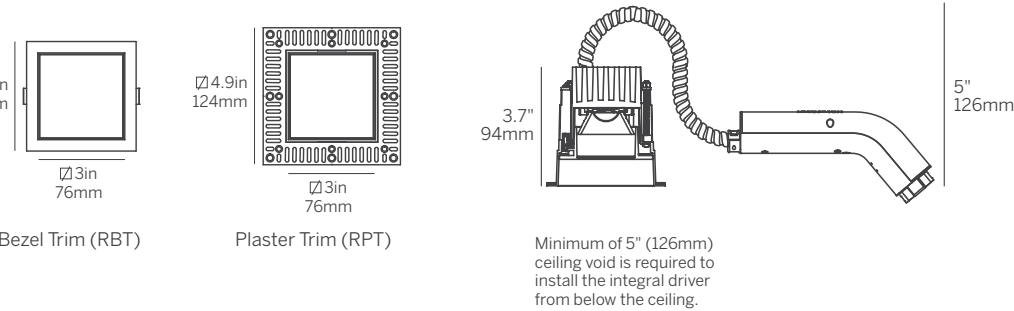

Recessed Cone (SRC) / Bezel Trim (RBT)



Micro-prismatic Opal (SMPO) / Bezel Trim (RBT)



Flush Pinhole (SFPH) / Plaster Trim (RPT)



Regressed Pinhole (SRPH) / Plaster Trim (RPT)

3” ProTools Downlight

Square Recessed

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁶	Cover	Beam	Trim Finish ⁷	Cover Finish ⁷	Options
WG-75SPTDL	RBT RPT	L M H TW WD	92 98 90 95	27 30 35 40 TW ⁴ WD ⁵	S S010 SPH PEQ0 RD010 RDFPN RPEQ0 DALI ⁴	SRC SFPH SRPH SMPO	20 30 50 80	W (std) S F	W (std) S F	CP IC NC LP SH WL RDL

- Model**

 - WG-75SPTDL = 3” ProTools Downlight Square Recessed
- Fixation**

 - RBT = Recessed Bezel Trim
 - RPT = Recessed Plaster Trim
- Power¹**

 - L = Low Power, 5.9W @ 350mA
 - M = Mid Power, 8.6W @ 500mA
 - H = High Power, 12.4W @ 700mA
 - TW = 9W @500mA
 - WD = 11.8W @ 350mA
- CRI**

 - 92 = 92 CRI
 - 98 = 98 CRI
 - 90 = 90 CRI (TW only)
 - 95 = 95 CRI (WD only)
- CCT^{2,3}**
(Low/Mid/High Power)

 - 27 = 2700K, (727/989/1306 lm)
 - 30 = 3000K, (782/1064/1405 lm)
 - 35 = 3500K, (782/1064/1405 lm)
 - 40 = 4000K, (837/1139/1505 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)⁴
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)⁵
- Integral Driver⁶**

 - S = Standard non-dim driver, 120-277V
 - S010 = Standard 10% 0-10V dimming, 120-277V
 - SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- Remote Driver⁶**

 - RD010 = EldoLED, 1% 0-10V dimming, 120-277V
 - RDFPN = Lutron Forward Phase 1%, 120V only
 - RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V⁴
- Cover**

 - SRC = Square Recessed Cone
 - SFPH = Square Flush Pinhole
 - SRPH = Square Regressed Pinhole
 - SMPO = Square Micro-prismatic Opal
- Beam**

 - 20 = 20° Beam Angle
 - 30 = 30° Beam Angle
 - 50 = 50° Beam Angle
 - 80 = 80° Beam Angle (SMPO only)
- Trim Finish⁷**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac 49/90500
 - F = Custom finish, specify RAL code
- Cover Finish⁷**

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac 49/90500
 - F = Custom finish, specify RAL code
- Options**

 - CP = Chicago Plenum Housing
 - IC = Insulated Ceiling Housing
 - NC = New Construction Housing
 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - SH = Reduces required plenum space to 3.5” (89mm) (available in low and Mid power S, S010 and SPH drivers only)
 - WL = Wet Location (available only with SRC and SMPO)
 - RDL = Regressed Diffused Lens (available with SRC and SRPH only)
- Emergency Remote Only**

 - Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.


- Notes**
- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 2 Other lumen packages available, consult factory.
 - 3 Source lumens shown, see IES files for delivered lumens.
 - 4 Available with NC, IC or CP Housing in accessible ceiling or remote driver only.
 - 5 WD available with PEQ0 integral driver, and RD010, RDFPN, RPEQ0 remote drivers.
 - 6 See power supply page for details.
 - 7 See Tiger Drylac color chart: inter-lux.com/tiger



3” ProTools Downlight
Round Recessed

- Part of a complete family of 3” aperture matching downlights.
- Small aperture, low brightness downlight for general and accent illumination.
- High lumen output and excellent color rendition for all applications.
- Installs from below the ceiling for new and retrofit installations.
- Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
- Tunable White and Warm Dim.
- Quick-Snap feature for field-configurable multiple combinations.
- EZ-Click Cover installation makes installing or changing Covers easy in the field.
- Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round recessed cone - low brightness, general illumination Flush pinhole - smallest apperture, maximum glare control Regressed pinhole - smallest apperture, maximum glare control Micro-prismatic opal - regressed, evenly diffuse lens for wide distribution
LED	92CRI, 98CRI, 90CRI and 95CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800 - 4000K Warm Dim from 1800 - 3000K
Optics	Micro-prismatic opal for wide, even illumination, 80 degree beam spread 20, 30, 50, 80 degree symmetrical beam spreads optional regressed diffused lens
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

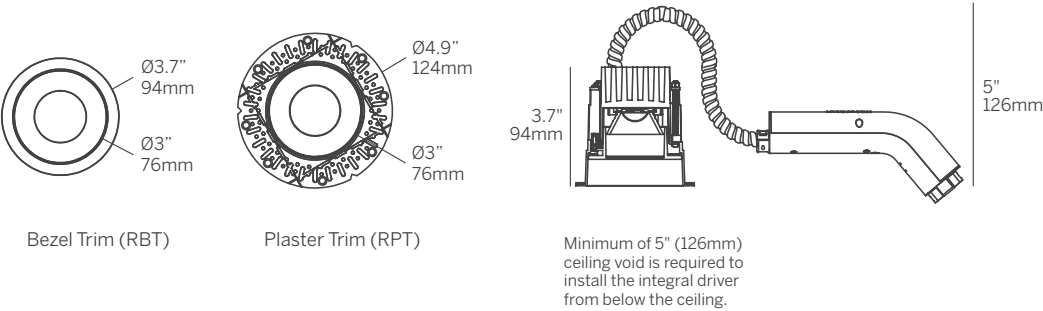

Recessed Cone (RRC) / Bezel Trim (RBT)



Micro-prismatic Opal (RMPO) / Bezel Trim (RBT)



Flush Pinhole (RFPH) / Plaster Trim (RPT)



Regressed Pinhole (RRPH) / Plaster Trim (RPT)

3” ProTools Downlight
Round Recessed

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁶	Cover	Beam	Trim Finish ⁷	Cover Finish ⁷	Options
WG-75RPTDL	RBT RPT	L M H TW WD	92 98 90 95	27 30 35 40 TW ⁴ WD ⁵	S S010 SPH PEQ0 RD010 RDFPN RPEQ0 DALI ⁴	RRC RFPH RRPH RMPO	20 30 50 80	W (std) S F	W (std) S F	CP IC NC LP SH WL RDL

Model

- WG-75RPTDL = 3” ProTools Downlight Round Recessed

Fixation

- RBT = Recessed Bezel Trim
- RPT = Recessed Plaster Trim

Power¹

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA
- TW = 9W @500mA
- WD = 11.8W @ 350mA

CRI

- 92 = 92 CRI
- 98 = 98 CRI
- 90 = 90 CRI (TW only)
- 95 = 95 CRI (WD only)

CCT^{2,3}

- (Low/Mid/High Power)
- 27 = 2700K, (727/989/1306 lm)
 - 30 = 3000K, (782/1064/1405 lm)
 - 35 = 3500K, (782/1064/1405 lm)
 - 40 = 4000K, (837/1139/1505 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)⁴
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)⁵

Integral Driver⁶

- S = Standard non-dim driver, 120-277V
- S010 = Standard 10% 0-10V dimming, 120-277V
- SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V

Remote Driver⁶

- RD010 = EldoLED, 1% 0-10V dimming, 120-277V
- RDFPN = Lutron Forward Phase 1%, 120V only
- RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V⁴

Cover

- RRC = Round Recessed Cone
- RFPH = Round Flush Pinhole
- RRPH = Round Regressed Pinhole
- RMPO = Round Micro-prismatic Opal

Beam

- 20 = 20° Beam Angle
- 30 = 30° Beam Angle
- 50 = 50° Beam Angle
- 80 = 80° Beam Angle (RMPO only)

Trim Finish⁷

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Cover Finish⁷

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- SH = Reduces required plenum space to 3.5" (89mm) (available in low and Mid power S, S010 and SPH drivers only)
- WL = Wet Location (available only with RRC and RMPO)
- RDL = Regressed Diffused Lens (available with RRC and RRPH only)

Emergency Remote Only

- Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.


Notes

- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 2 Other lumen packages available, consult factory.
- 3 Source lumens shown, see IES files for delivered lumens.
- 4 Available with NC, IC or CP Housing in accessible ceiling or remote driver only.
- 5 WD available with PEQ0 integral driver, and RD010, RDFPN, RPEQ0 remote drivers.
- 6 See power supply page for details.
- 7 See Tiger Drylac color chart: inter-lux.com/tiger


3” ProTools Downlight
Square Regressed Lens

- Part of a complete family of 3” aperture matching downlights.
 - Regressed lens gives a clean, finished A slightly regressed lens removes the brightness from the ceiling while maintaining a wide, general pattern of illumination.
 - Wide angle light for general illumination.
 - High lumen output and excellent color rendition for all applications.
 - Installs from below the ceiling for new and retrofit installations.
- Very shallow ceiling depth required for both integral and remote drivers.
 - Standard low luminance reflector finishes with matching trims and trimless.
 - Tunable White and Warm Dim.
 - Quick-Snap feature for field-configurable multiple combinations.
 - EZ-Click Cover installation makes installing or changing Covers easy in the field.
 - Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round aperture with minimal ceiling interruption and regressed lens
LED	92CRI, 98CRI, 90CRI and 95CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800 - 4000K Warm Dim from 1800 - 3000K
Optics	Micro-prismatic lens for wide, even distribution set 1.3” above the finished ceiling
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

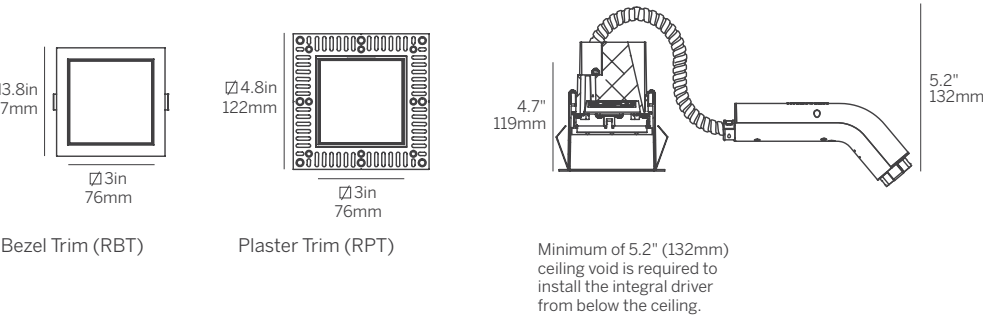

Micro-prismatic Opal (RMPO) / Bezel Trim (RBT)

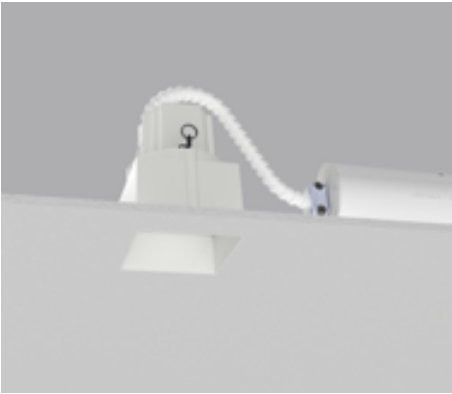

Micro-prismatic Opal (RMPO) / Plaster Trim (RPT)

3” ProTools Downlight
Square Regressed Lens

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁶	Cover	Beam	Trim Finish ⁷	Cover Finish ⁷	Options
WG-75SPTDLR	RBT RPT	L M H TW WD	92 98 90 95	27 30 35 40 TW ⁴ WD ⁵	S S010 SPH PEQ0 RD010 RDFPN RPEQ0 DALI ⁴	SMPO	85	W (std) S F	W (std)	CP IC NC LP

- Model**

 - WG-75SPTDLR = 3” ProTools Downlight Square Regressed Lens

Fixation

 - RBT = Recessed Bezel Trim
 - RPT = Recessed Plaster Trim

Power¹

 - L = Low Power, 5.9W @ 350mA
 - M = Mid Power, 8.6W @ 500mA
 - H = High Power, 12.4W @ 700mA
 - TW = 9W @500mA
 - WD = 11.8W @ 350mA

CRI

 - 92 = 92 CRI
 - 98 = 98 CRI
 - 90 = 90 CRI (TW only)
 - 95 = 95 CRI (WD only)

CCT^{2,3}
(Low/Mid/High Power)

 - 27 = 2700K, (727/989/1306 lm)
 - 30 = 3000K, (782/1064/1405 lm)
 - 35 = 3500K, (782/1064/1405 lm)
 - 40 = 4000K, (837/1139/1505 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)⁴
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)⁵

Integral Driver⁶

 - S = Standard non-dim driver, 120-277V
 - S010 = Standard 10% 0-10V dimming, 120-277V
 - SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- Remote Driver⁶**

 - RD010 = EldoLED, 1% 0-10V dimming, 120-277V
 - RDFPN = Lutron Forward Phase 1%, 120V only
 - RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V⁴

Cover

 - SMPO = Square Micro-prismatic Opal

Beam

 - 85 = 85° Beam Angle

Trim Finish⁷

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac 49/90500
 - F = Custom finish, specify RAL code

Cover Finish⁷

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)

Options

 - CP = Chicago Plenum Housing
 - IC = Insulated Ceiling Housing
 - NC = New Construction Housing
 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)

Emergency Remote Only

 - Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.


- Notes**
- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 2 Other lumen packages available, consult factory.
 - 3 Source lumens shown, see IES files for delivered lumens.
 - 4 Available with NC, IC or CP Housing in accessible ceiling or remote driver only.
 - 5 WD available with PEQ0 integral driver, and RD010, RDFPN, RPEQ0 remote drivers.
 - 6 See power supply page for details.
 - 7 See Tiger Drylac color chart: inter-lux.com/tiger



3” ProTools Downlight
Round Regressed Lens

- Part of a complete family of 3” aperture matching downlights.
 - Regressed lens gives a clean, finished slightly regressed lens removes the brightness from the ceiling while maintaining a wide, general pattern of illumination.
 - Wide angle light for general illumination.
 - High lumen output and excellent color rendition for all applications.
 - Installs from below the ceiling for new and retrofit installations.
- Very shallow ceiling depth required for both integral and remote drivers.
 - Standard low luminance reflector finishes with matching trims and trimless.
 - Tunable White and Warm Dim.
 - Quik-Snap feature for field-configurable multiple combinations.
 - EZ-Click Cover installation makes installing or changing Covers easy in the field.
 - Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quik-Snap feature allows endless multiple combinations without specialized housings
Covers	Round aperture with minimal ceiling interruption and regressed lens
LED	92CRI, 98CRI, 90CRI and 95CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800 - 4000K Warm Dim from 1800 - 3000K
Optics	Micro-prismatic lens for wide, even distribution set 1.3” above the finished ceiling
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

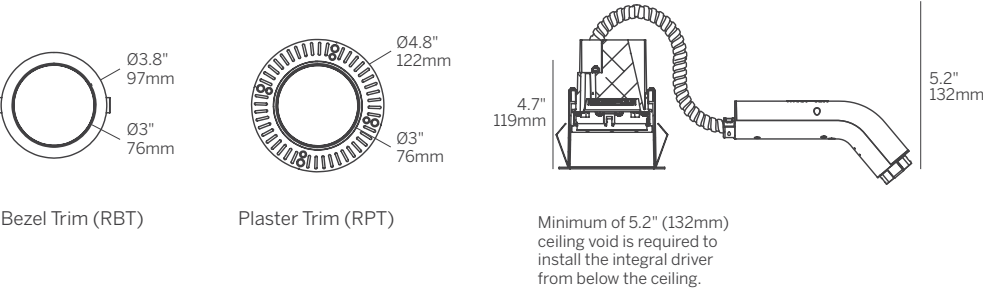

Micro-prismatic Opal (RMPO) / Bezel Trim (RBT)



Micro-prismatic Opal (RMPO) / Plaster Trim (RPT)

3” ProTools Downlight
Round Regressed Lens

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁵	Cover	Beam	Trim Finish ⁶	Cover Finish ⁶	Options
WG-75RPTDLR	RBT RPT	L M H TW WD	92 98 90 95	27 30 35 40 TW ⁴ WD ⁵	S S010 SPH PEQ0 RD010 RDFPN RPEQ0 DALI ⁴	RMPO	85	W (std) S F	W (std)	CP IC NC LP

- Model**

 - WG-75RPTDLR = 3” ProTools Downlight Round Regressed Lens

Fixation

 - RBT = Recessed Bezel Trim
 - RPT = Recessed Plaster Trim

Power¹

 - L = Low Power, 5.9W @ 350mA
 - M = Mid Power, 8.6W @ 500mA
 - H = High Power, 12.4W @ 700mA
 - TW = 9W @500mA
 - WD = 11.8W @ 350mA

CRI

 - 92 = 92 CRI
 - 98 = 98 CRI
 - 90 = 90 CRI (TW only)
 - 95 = 95 CRI (WD only)

CCT^{2,3}
(Low/Mid/High Power)

 - 27 = 2700K, (727/989/1306 lm)
 - 30 = 3000K, (782/1064/1405 lm)
 - 35 = 3500K, (782/1064/1405 lm)
 - 40 = 4000K, (837/1139/1505 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)⁴
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)⁵

Integral Driver⁶

 - S = Standard non-dim driver, 120-277V
 - S010 = Standard 10% 0-10V dimming, 120-277V
 - SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- Remote Driver⁶**

 - RD010 = EldoLED, 1% 0-10V dimming, 120-277V
 - RDFPN = Lutron Forward Phase 1%, 120V only
 - RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V⁴

Cover

 - RMPO = Round Micro-prismatic Opal

Beam

 - 85 = 85° Beam Angle

Trim Finish⁷

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac 49/90500
 - F = Custom finish, specify RAL code

Cover Finish⁷

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)

Options

 - CP = Chicago Plenum Housing
 - IC = Insulated Ceiling Housing
 - NC = New Construction Housing
 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)

Emergency Remote Only

 - Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 2 Other lumen packages available, consult factory.
 - 3 Source lumens shown, see IES files for delivered lumens.
 - 4 Available with NC, IC or CP Housing in accessible ceiling or remote driver only.
 - 5 WD available with PEQ0 integral driver, and RD010, RDFPN, RPEQ0 remote drivers.
 - 6 See power supply page for details.
 - 7 See Tiger Drylac color chart: inter-lux.com/tiger



3” ProTools Wall Wash

Square Recessed

- Part of a complete family of 3” aperture matching downlights.
 - Wall Wash with flush aperture and room side cut-off.
 - High lumen output and excellent color rendition for all applications.
 - Installs from below the ceiling for new and retrofit installations.
 - Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
 - Tunable White and Warm Dim.
 - Quick-Snap feature for field-configurable multiple combinations.
 - EZ-Click Cover installation makes installing or changing Covers easy in the field.
 - Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.




Wall Wash (SWW) / Bezel Trim (RBT)



Wall Wash (SWW) / Plaster Trim (RPT)

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Flush aperture with room-side cutoff and wall wash distribution
LED	92CRI, 98CRI, 90CRI and 95CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K Tunable white from 1800 - 4000K Warm Dim from 1800 - 3000K
Optics	Satin spread lens optic
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional:New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

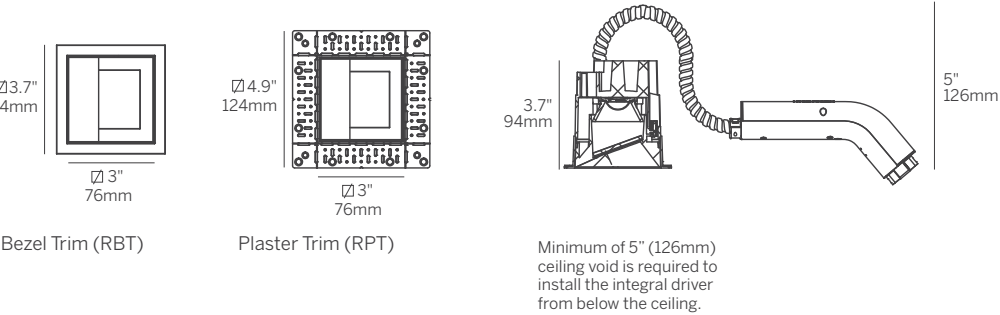

3” ProTools Wall Wash

Square Recessed

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁶	Cover	Beam	Trim Finish ⁷	Cover Finish ⁷	Options
WG-75SPTWW	RBT RPT	L M H TW WD	92 98 90 95	27 30 35 40 TW ⁴ WD ⁵	S S010 SPH PEQ0 RD010 RDFPN RPEQ0 DALI ⁴	SWW	WW	W (std) S F	W (std) S F	CP IC NC LP WL

Model

- WG-75SPTWW = 3" ProTools Wall Wash Square Recessed

Fixation

- RBT = Recessed Bezel Trim
- RPT = Recessed Plaster Trim

Power¹

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA
- TW = 9W @500mA
- WD = 11.8W @ 350mA

CRI

- 92 = 92 CRI
- 98 = 98 CRI
- 90 = 90 CRI (TW only)
- 95 = 95 CRI (WD only)

CCT^{2,3}

- (Low/Mid/High Power)
- 27 = 2700K, (727/989/1306 lm)
 - 30 = 3000K, (782/1064/1405 lm)
 - 35 = 3500K, (782/1064/1405 lm)
 - 40 = 4000K, (837/1139/1505 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)⁴
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)⁵

Integral Driver⁶

- S = Standard non-dim driver, 120-277V
- S010 = Standard 10% 0-10V dimming, 120-277V
- SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V

Remote Driver⁶

- RD010 = EldoLED, 1% 0-10V dimming, 120-277V
- RDFPN = Lutron Forward Phase 1%, 120V only
- RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V⁴

Cover

- SWW = Square Wall Wash

Beam

- WW = Wall Wash

Trim Finish⁷

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Cover Finish⁷

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- WL = Wet Location

Emergency Remote Only

- Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.

Notes

- ¹ Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- ² Other lumen packages available, consult factory.
- ³ Source lumens shown, see IES files for delivered lumens.
- ⁴ Available with NC, IC or CP Housing in accessible ceiling or remote driver only.
- ⁵ WD available with PEQ0 integral driver, and RD010, RDFPN, RPEQ0 remote drivers.
- ⁶ See power supply page for details.
- ⁷ See Tiger Drylac color chart: inter-lux.com/tiger



3” ProTools Wall Wash
Round Recessed

- Part of a complete family of 3” aperture matching downlights.
 - Wall Wash with flush aperture and room side cut-off.
 - High lumen output and excellent color rendition for all applications.
 - Installs from below the ceiling for new and retrofit installations.
 - Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
 - Tunable White and Warm Dim.Quick-Snap feature for field-configurable multiple combinations.
 - EZ-Click Cover installation makes installing or changing Covers easy in the field.
 - Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.




Wall Wash (RWW) / Bezel Trim (RBT)



Wall Wash (RWW) / Plaster Trim (RPT)

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Flush aperture with room-side cutoff and wall wash distribution
LED	92CRI, 98CRI, 90CRI and 95CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800 - 4000K Warm Dim from 1800 - 3000K
Optics	Satin spread lens optic
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

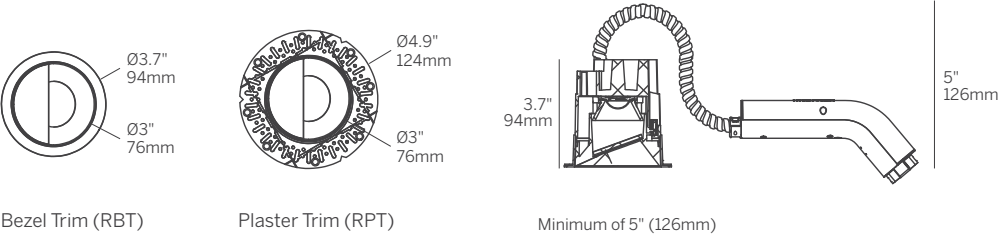

Bezel Trim (RBT)

Plaster Trim (RPT)

Minimum of 5" (126mm) ceiling void is required to install the integral driver from below the ceiling.

3” ProTools Wall Wash
Round Recessed

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁶	Cover	Beam	Trim Finish ⁷	Cover Finish ⁷	Options
WG-75RPTWW	RBT RPT	L M H TW WD	92 98 90 95	27 30 35 40 TW ⁴ WD ⁵	S S010 SPH PEQ0 RD010 RDFPN RPEQ0 DALI ⁴	RWW	WW	W (std) S F	W (std) S F	CP IC NC LP WL

Model

- WG-75RPTWW = 3” ProTools Wall Wash Round Recessed

Fixation

- RBT = Recessed Bezel Trim
- RPT = Recessed Plaster Trim

Power¹

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA
- TW = 9W @500mA
- WD = 11.8W @ 350mA

CRI

- 92 = 92 CRI
- 98 = 98 CRI
- 90 = 90 CRI (TW only)
- 95 = 95 CRI (WD only)

CCT^{2,3}

- (Low/Mid/High Power)
- 27 = 2700K, (727/989/1306 lm)
 - 30 = 3000K, (782/1064/1405 lm)
 - 35 = 3500K, (782/1064/1405 lm)
 - 40 = 4000K, (837/1139/1505 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)⁴
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)⁵

Integral Driver⁶

- S = Standard non-dim driver, 120-277V
- S010 = Standard 10% 0-10V dimming, 120-277V
- SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V

Remote Driver⁶

- RD010 = EldoLED, 1% 0-10V dimming, 120-277V
- RDFPN = Lutron Forward Phase 1%, 120V only
- RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V⁴

Cover

- RWW = Round Wall Wash

Beam

- WW = Wall Wash

Trim Finish⁷

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Cover Finish⁷

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- WL = Wet Location

Emergency Remote Only

- Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.

Notes



- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 2 Other lumen packages available, consult factory.
- 3 Source lumens shown, see IES files for delivered lumens.
- 4 Available with NC, IC or CP Housing in accessible ceiling or remote driver only.
- 5 WD available with PEQ0 integral driver, and RD010, RDFPN, RPEQ0 remote drivers.
- 6 See power supply page for details.
- 7 See Tiger Drylac color chart: inter-lux.com/tiger




3” ProTools Adjustable Square Recessed

- Part of a complete family of 3” aperture matching downlights.
- Multiple beam spreads to accommodate all applications.
- High lumen output and excellent color rendition for all applications.
- Installs from below the ceiling for new and retrofit installations.
- Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
- 40 degree adjustability with 361 degree rotation.
- Quick-Snap feature for field-configurable multiple combinations.
- EZ-Click Cover installation makes installing or changing Covers easy in the field.
- Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Recessed Cone for low brightness, wide distribution Flush pin hole for maximum cut-off
LED	92CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Optics	25 and 36 degree beam spreads optional regressed diffused lens
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

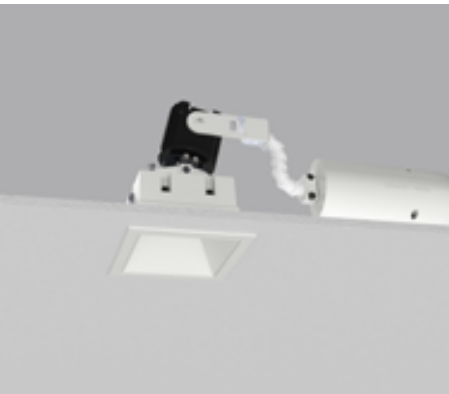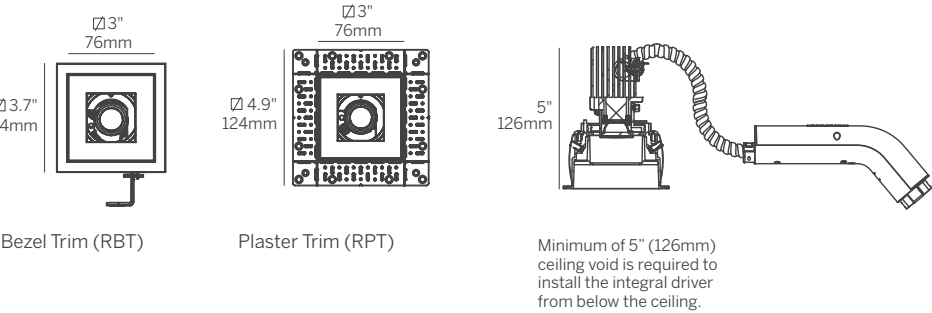


Recessed Cone (SRC) / Bezel Trim (RBT)

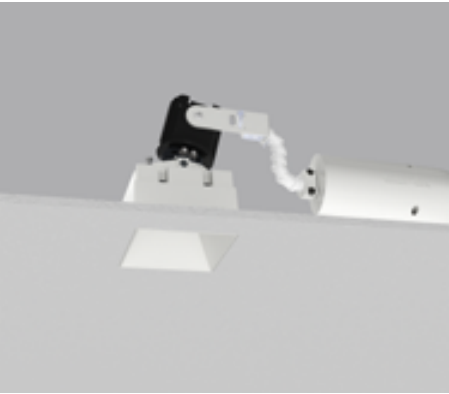

Recessed Cone (SRC) / Plaster Trim (RPT)



Flush Pinhole (SRPH) / Bezel Trim (RBT)

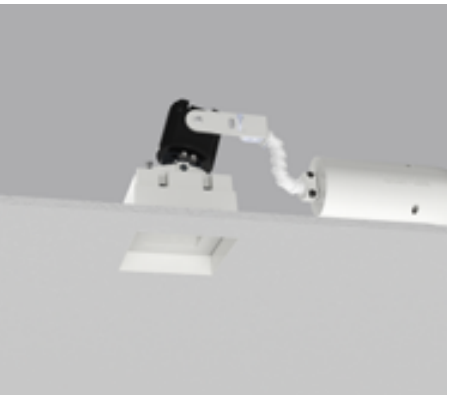

Flush Pinhole (SRPH) / Plaster Trim (RPT)

3” ProTools Adjustable Square Recessed

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁴	Cover	Beam	Trim Finish ⁵	Cover Finish ⁵	Options
WG-75SPTA	RBT RPT	L M H	92	27 30 35 40	S S010 SPH PEQ0 RD010 RDFPN RPEQ0	SRC SRPH	25 36	W (std) S F	W (std) S F	CP IC NC LP W RDL

- Model**
- WG-75SPTA = 3” ProTools Adjustable Square Recessed
- Fixation**
- RBT = Recessed Bezel Trim
 - RPT = Recessed Plaster Trim
- Power¹**
- L = Low Power, 5.9W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA
- CRI**
- 92 = 92 CRI
- CCT^{2,3}**
(Low/Mid/High Power)
- 27 = 2700K, (727/989/1306 lm)
 - 30 = 3000K, (782/1064/1405 lm)
 - 35 = 3500K, (782/1064/1405 lm)
 - 40 = 4000K, (837/1139/1505 lm)
- Integral Driver⁴**
- S = Standard non-dim driver, 120-277V
 - S010 = 0-10V >10% dimming, 120-277V
 - SPH = Standard Phase Dimming, 120VAC (available in low and mid power only)
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- Remote Driver⁴**
- RD010 = EldoLED, 1%, 0-10V dimming, 120-277V
 - RDFPN = Lutron Forward Phase 1%, 120VAC only
 - RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- Cover**
- SRC = Square Recessed Cone
 - SRPH = Square Regressed Pinhole (available as 25° only)
- Beam**
- 25 = 25° Beam Angle
 - 36 = 36° Beam Angle
- Trim Finish⁵**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac 49/90500
 - F = Custom finish, specify RAL code
- Cover Finish⁵**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac 49/90500
 - F = Custom finish, specify RAL code
- Options**
- CP = Chicago Plenum Housing
 - IC = Insulated Ceiling Housing
 - NC = New Construction Housing
 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - WL = Wet Location (only available with SRC)
 - RDL = Regressed Diffused Lens
- Emergency Remote Only**
- Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.


- Notes**
- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 2 Other lumen packages available, consult factory.
 - 3 Source lumens shown, see IES files for delivered lumens.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger



3” ProTools Adjustable
Round Recessed

- Part of a complete family of 3” aperture matching downlights.
 - Multiple beam spreads to accommodate all applications.
 - High lumen output and excellent color rendition for all applications.
 - Installs from below the ceiling for new and retrofit installations.
 - Very shallow ceiling depth required for both integral and remote drivers.
 - Standard low luminance reflector finishes with matching trims and trimless.
- 40 degree adjustability with 361 degree rotation.
 - Quick-Snap feature for field-configurable multiple combinations.
 - EZ-Click Cover installation makes installing or changing Covers easy in the field.
 - Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Recessed Cone for low brightness, wide distribution Flush pinhole for maximum cut-off
LED	92CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Optics	25 and 36 degree beam spreads optional regressed diffused lens
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

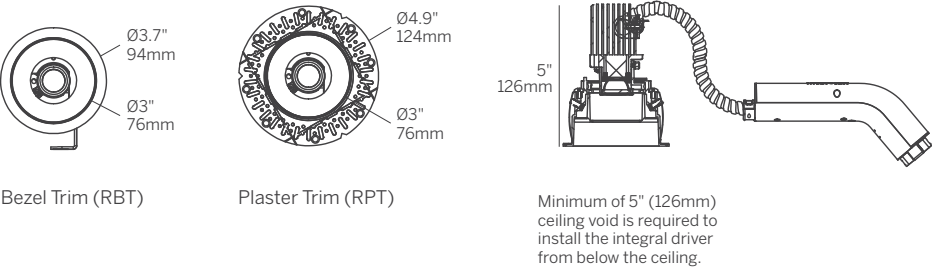

Recessed Cone (RRC) / Bezel Trim (RBT)



Recessed Cone (RRC) / Plaster Trim (RPT)



Flush Pinhole (RRPH) / Bezel Trim (RBT)



Flush Pinhole (RRPH) / Plaster Trim (RPT)

3” ProTools Adjustable
Round Recessed

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁴	Cover	Beam	Trim Finish ⁵	Cover Finish ⁵	Options
WG-75RPTA	RBT RPT	L M H	92	27 30 35 40	S S010 SPH PEQ0 RD010 RDFPN RPEQ0	RRC RRPH	25 36	W (std) S F	W (std) S F	CP IC NC LP WL RDL

- Model**

 - WG-75RPTA = 3” ProTools Adjustable Round Recessed

Fixation

 - RBT = Recessed Bezel Trim
 - RPT = Recessed Plaster Trim

Power¹

 - L = Low Power, 5.9W @ 350mA
 - M = Mid Power, 8.4W @ 500mA
 - H = High Power, 12W @ 700mA

CRI

 - 92 = 92 CRI

CCT^{2,3}
(Low/Mid/High Power)

 - 27 = 2700K, (727/989/1306 lm)
 - 30 = 3000K, (782/1064/1405 lm)
 - 35 = 3500K, (782/1064/1405 lm)
 - 40 = 4000K, (837/1139/1505 lm)

Integral Driver⁴

 - S = Standard non-dim driver, 120-277V
 - S010 = 0-10V >10% dimming, 120-277V
 - SPH = Standard Phase Dimming, 120VAC (available in low and mid power only)
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V

Remote Driver⁴

 - RD010 = EldoLED, 1%, 0-10V dimming, 120-277V
 - RDFPN = Lutron Forward Phase 1%, 120VAC only
 - RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- Cover**

 - RRC = Round Recessed Cone
 - RRPH = Round Regressed Pinhole (available as 25° only)

Beam

 - 25 = 25° Beam Angle
 - 36 = 36° Beam Angle

Trim Finish⁵

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac 49/90500
 - F = Custom finish, specify RAL code

Cover Finish⁵

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac 49/90500
 - F = Custom finish, specify RAL code

Options

 - CP = Chicago Plenum Housing
 - IC = Insulated Ceiling Housing
 - NC = New Construction Housing
 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - WL = Wet Location (only available with RRC)
 - RDL = Regressed Diffused Lens

Emergency Remote Only

 - Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.



- Notes**
- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 2 Other lumen packages available, consult factory.
 - 3 Source lumens shown, see IES files for delivered lumens.
 - 4 See power supply page for details.
 - 5 See Tiger Drylac color chart: inter-lux.com/tiger




3” ProTools Accent Wall Wash
Square Recessed

- Part of a complete family of 3” aperture matching downlights.
 - Regressed lens gives a clean, finished appearance to this small aperture downlight.
 - Wide asymmetric distribution for even wall illumination.
 - High lumen output and excellent color rendition for all applications.
 - Installs from below the ceiling for new and retrofit installations.
 - Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
 - Tunable White and Warm Dim.
 - Quick-Snap feature for field-configurable multiple combinations.
 - EZ-Click Cover installation makes installing or changing Covers easy in the field.
 - Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round Micro-prismatic Opal Cover
LED	92CRI, 98CRI, 90CRI and 95CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800 - 4000K Warm Dim from 1800 - 3000K
Optics	Angled, wide distribution spread lens angled to deliver maximum illumination to the wall
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

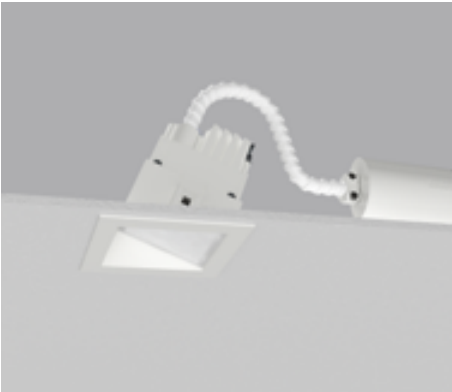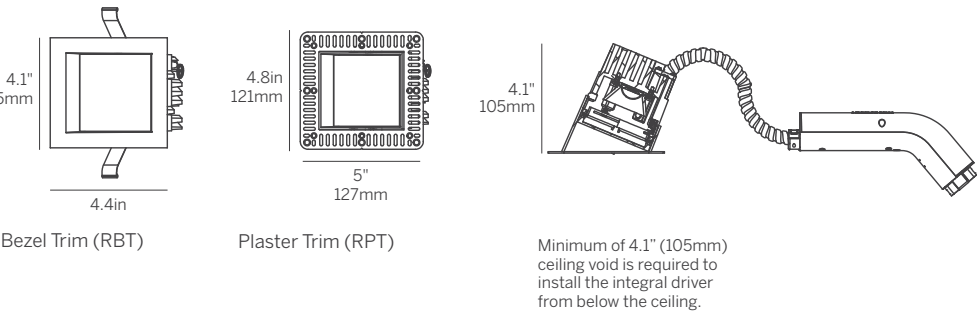

Accent Wall Wash (SAWW) / Bezel Trim (RBT)

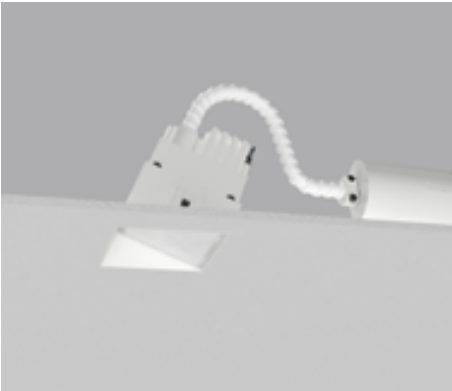

Accent Wall Wash (SAWW) / Plaster Trim (RPT)

3” ProTools Accent Wall Wash
Square Recessed

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁶	Cover	Beam	Trim Finish ⁷	Cover Finish ⁷	Options
WG-75SPTAWW	RBT RPT	L M H TW WD	92 98 90 95	27 30 35 40 TW ⁴ WD ⁵	S S010 SPH PEQ0 RD010 RDFPN RPEQ0 DALI ⁴	SAWW	WW	W (std) S F	W (std)	CP IC NC LP WL

- Model**

 - WG-75SPTAWW = 3” ProTools Accent Wall Wash Square Recessed

Fixation

 - RBT = Recessed Bezel Trim
 - RPT = Recessed Plaster Trim

Power¹

 - L = Low Power, 5.9W @ 350mA
 - M = Mid Power, 8.6W @ 500mA
 - H = High Power, 12.4W @ 700mA
 - TW = 9W @500mA
 - WD = 11.8W @ 350mA

CRI

 - 92 = 92 CRI
 - 98 = 98 CRI
 - 90 = 90 CRI (TW only)
 - 95 = 95 CRI (WD only)

CCT^{2,3}
(Low/Mid/High Power)

 - 27 = 2700K, (727/989/1306 lm)
 - 30 = 3000K, (782/1064/1405 lm)
 - 35 = 3500K, (782/1064/1405 lm)
 - 40 = 4000K, (837/1139/1505 lm)
 - TW = Tunable White 1800 - 4000K, (610 - 1060 lm)⁴
 - WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)⁵

Integral Driver⁶

 - S = Standard non-dim driver, 120-277V
 - S010 = Standard 10% 0-10V dimming, 120-277V
 - SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- Remote Driver⁶**

 - RD010 = EldoLED, 1% 0-10V dimming, 120-277V
 - RDFPN = Lutron Forward Phase 1%, 120V only
 - RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V⁴

Cover

 - SAWW = Square Accent Wall Wash

Beam

 - WW = Wall Wash

Trim Finish⁷

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - S = Silver, 15% gloss, Tiger Drylac 49/90500
 - F = Custom finish, specify RAL code

Cover Finish⁷

 - W = White, 15% gloss, Tiger Drylac 49/11350 (standard)

Options

 - CP = Chicago Plenum Housing
 - IC = Insulated Ceiling Housing
 - NC = New Construction Housing
 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - WL = Wet Location

Emergency Remote Only

 - Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.


- Notes**
- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - 2 Other lumen packages available, consult factory.
 - 3 Source lumens shown, see IES files for delivered lumens.
 - 4 Available with NC, IC or CP Housing in accessible ceiling or remote driver only.
 - 5 WD available with PEQ0 integral driver, and RD010, RDFPN, RPEQ0 remote drivers.
 - 6 See power supply page for details.
 - 7 See Tiger Drylac color chart: inter-lux.com/tiger



3” ProTools Accent Wall Wash
Round Recessed

- Part of a complete family of 3” aperture matching downlights.
- Regressed lens gives a clean, finished appearance to this small aperture downlight.
- Wide asymmetric distribution for even wall illumination.
- High lumen output and excellent color rendition for all applications.
- Installs from below the ceiling for new and retrofit installations.
- Very shallow ceiling depth required for both integral and remote drivers.
- Standard low luminance reflector finishes with matching trims and trimless.
- Tunable White and Warm Dim.
- Quick-Snap feature for field-configurable multiple combinations.
- EZ-Click Cover installation makes installing or changing Covers easy in the field.
- Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.

Housing	Die-caste aluminum for precision fit and heat dissipation Mounting hardware for all ceiling types; trim and trimless Quick-screw mounting mechanism EZ-Click Cover installation Trimless housing with Quick-Snap feature allows endless multiple combinations without specialized housings
Covers	Round Micro-prismatic Opal Cover
LED	92CRI, 98CRI, 90CRI and 95CRI, 100+ lumens per watt Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K Tunable White from 1800 - 4000K Warm Dim from 1800 - 3000K
Optics	Angled, wide distribution spread lens angled to deliver maximum illumination to the wall
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing POE driver compatibility
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

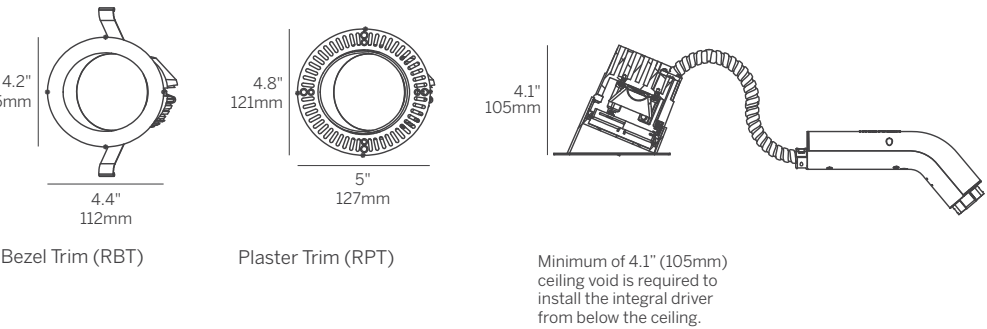

Accent Wall Wash (RAWW) / Bezel Trim (RBT)



Accent Wall Wash (RAWW) / Plaster Trim (RPT)

3” ProTools Accent Wall Wash
Round Recessed

Model	Fixation	Power ¹	CRI	CCT ^{2,3}	Driver ⁶	Cover	Beam	Trim Finish ⁷	Cover Finish ⁷	Options
WG-75RPTAWW	RBT RPT	L M H TW WD	92 98 90 95	27 30 35 40 TW ⁴ WD ⁵	S S010 SPH PEQ0 RD010 RDFPN RPEQ0 DALI ⁴	RAWW	WW	W (std) S F	W (std)	CP IC NC LP WL

Model

- WG-75RPTAWW = 3” ProTools Accent Wall Wash Round Recessed

Fixation

- RBT = Recessed Bezel Trim
- RPT = Recessed Plaster Trim

Power¹

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA
- TW = 9W @500mA
- WD = 11.8W @ 350mA

CRI

- 92 = 92 CRI
- 98 = 98 CRI
- 90 = 90 CRI (TW only)
- 95 = 95 CRI (WD only)

CCT^{2,3}

- (Low/Mid/High Power)
- 27 = 2700K, (727/989/1306 lm)
- 30 = 3000K, (782/1064/1405 lm)
- 35 = 3500K, (782/1064/1405 lm)
- 40 = 4000K, (837/1139/1505 lm)
- TW = Tunable White 1800 - 4000K, (610 - 1060 lm)⁴
- WD = Warm Dimming 1800 - 3000K, (31 - 1150 lm)⁵

Integral Driver⁶

- S = Standard non-dim driver, 120-277V
- S010 = Standard 10% 0-10V dimming, 120-277V
- SPH = Standard 10% Phase Dimming, 120V only (available in low and mid power only)
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V

Remote Driver⁶

- RD010 = EldoLED, 1% 0-10V dimming, 120-277V
- RDFPN = Lutron Forward Phase 1%, 120V only
- RPEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DALI = EldoLED, 0.1%, DALI dimming (Tunable White), 120-277V⁴

Cover

- RAWW = Round Accent Wall Wash

Beam

- WW = Wall Wash

Trim Finish⁷

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finish, specify RAL code

Cover Finish⁷

- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)

Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- WL = Wet Location

Emergency Remote Only

- Emergency LED battery backup available, ordered separately

Whitegoods reserves the right to change any information without prior notice.

Notes

- 1 Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- 2 Other lumen packages available, consult factory.
- 3 Source lumens shown, see IES files for delivered lumens.
- 4 Available with NC, IC or CP Housing in accessible ceiling or remote driver only.
- 5 WD available with PEQ0 integral driver, and RD010, RDFPN, RPEQ0 remote drivers.
- 6 See power supply page for details.
- 7 See Tiger Drylac color chart: inter-lux.com/tiger



2.4" General Downlights (GDL)


The **2.4" General Downlights (GDL)** family offers round flush, regressed and wall washers for indoor and outdoor applications with a bezel trim requiring very minimal ceiling depth while delivering low brightness illumination.

- Downlight
- Wall Wash
- Wet Location


Application guide	28-29
Product details	146-141
Design guide	166-173




2.4" General Downlights (GDL) ease of Installation




Pull Power Cable and Control Cable through the ceiling opening.



Insert the Driver Housing into the ceiling opening.

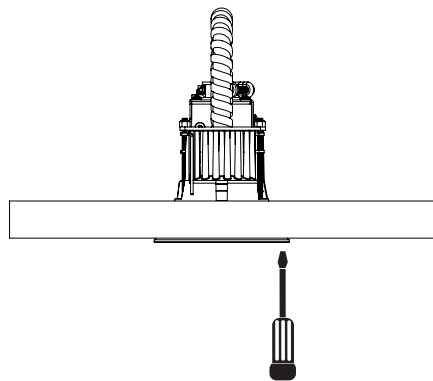

Screw the 2 philips head screws clockwise to engage the Ceiling Brackets.



Click the Cover into the Housing for final installation.



2.4" General Downlights (GDL)

The Whitegoods GDL was designed to be an all-purpose, budget conscious solution where a small aperture downlight family with minimal ceiling depth requirement is preferred, for both . Flush lens downlight for high-angle illumination and cone reflector downlight for optimal brightness control, both available in wet location for showers and outdoors, and wallwash fixtures are used in multi-residential projects, hotels, restaurants and residences. Integral, shallow depth driver and housing combinations, as well as remote driver options expand the range and make it the choice when ceiling depth is at a premium.



2.4" General Downlight Round Flush Diffuser

Product details 146
Design guide 168-173



2.4" General Downlight Round Regressed Cone

Product details 148
Design guide 166-169



2.4" General Downlight Wall Wash


Product details 150

index




2.4” General Downlight
Flush Round Opal Diffuser

- Part of a family of 2.4” aperture matching downlights.
 - General downlight with high-angle distribution provides illumination to adjacent walls.
 - Very shallow depth, installed from below the finished ceiling.
 - Integral or remote driver accommodate a large selection of driver and control options.
- White and silver finish as standard.
 - Mounts in 1/16" to 1" surface.
 - Wet Location standard for use in showers and outdoors.
 - Made in the USA
 - 5-year Warranty

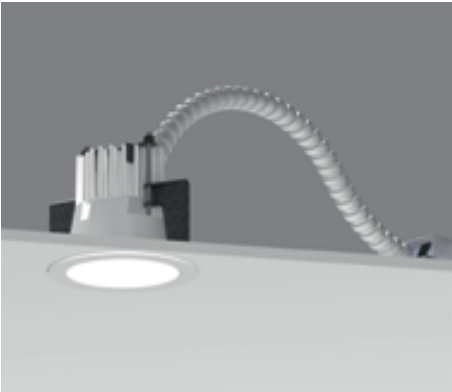

Housing	Die-caste aluminum for precision fit and heat dissipation 3/8" bezel trim compatible with installation from below into ACT, drywall and hard ceilings Quick-screw mounting mechanism EZ-Click Cover installation
Covers	Round Satin Opal Cover flush to ceiling
LED	92CRI, 60+ lumens per watt delivered Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Optics	High angle symmetrical distribution
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

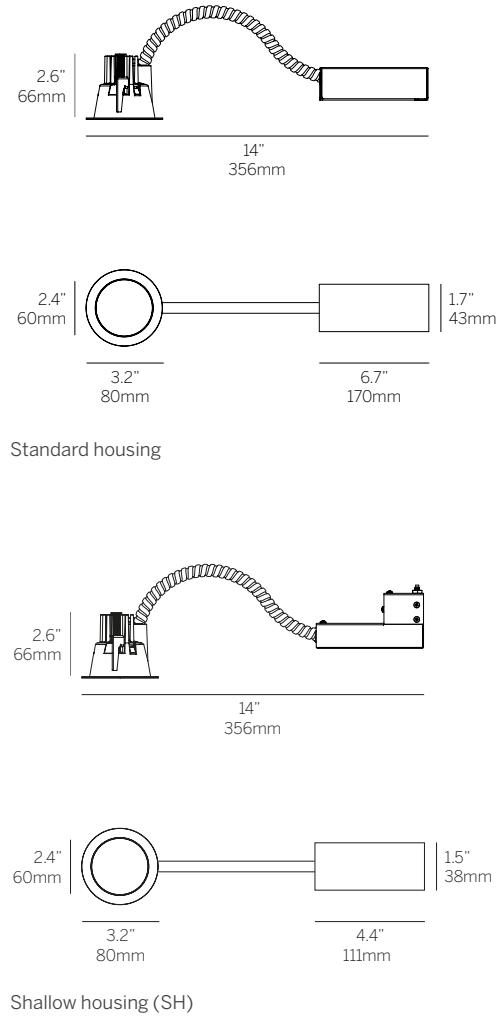

2.4” General Downlight
Flush Round Opal Diffuser

Model	Fixation	Power ¹	CRI/CCT ^{2,3}	Driver ⁵	Cover	Beam	Options
WG-60RGDL	RBT	L M H	927 930 935 940	X S S010 SPH D010 PEQ1 PEQ0 DFPN	FROD	W (std) S ⁵ F	CP IC NC LP SH WL

- Model**

 - WG-60RGDL = 2.4” General Downlight Flush Round Opal Diffuser

Fixation

 - RBT = Recessed Bezel Trim

Power¹

 - L = Low Power, 5.9W @ 350mA
 - M = Mid Power, 8.6W @ 500mA
 - H = High Power, 12.4W @ 700mA

CRI/CCT^{2,3}

90+ CRI (Low/Medium/High Power)

 - 927 = 2700K, (416/566/747 lm)
 - 930 = 3000K, (448/609/804 lm)
 - 935 = 3500K, (448/609/804 lm)
 - 940 = 4000K, (479/652/861 lm)

Driver⁴

 - X = Driver ordered separately

Integral

 - S = Standard non-dim driver, 120-277V
 - S010 = 0-10V >10% dimming, 120-277V
 - SPH = Standard Phase Dimming, 120VAC (available in low and medium power only)
- Remote**

 - D010 = EldoLED, 1%, 0-10V dimming, 120-277V
 - PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
 - PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
 - DFPN = Lutron Forward Phase 1%, 120VAC only

Lens

 - FROD = Flush round opal diffuser

Finish

 - W = White, RAL 9010 (standard)
 - S = Silver, 15% gloss, Tiger Drylac 49/90500⁵
 - F = Custom finish (provide RAL code)

Options

 - CP = Chicago Plenum Housing
 - IC = Insulated Ceiling Housing
 - NC = New Construction Housing
 - LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
 - SH = Reduces required plenum space to 3.5” (89mm) (available in low and medium power S, S010 and SPH drivers only)
 - WL = Wet Location

Emergency Remote Only

 - Emergency LED battery backup available, order separately

Whitegoods reserves the right to change any information without prior notice.


- Notes**
- ¹ Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
 - ² Other lumen packages available, consult factory.
 - ³ Delivered lumens shown. See page 4 for additional details.
 - ⁴ See power supply page for details.
 - ⁵ See Tiger Drylac color chart: inter-lux.com/tiger





2.4” General Downlight

Round Regressed Cone



- Part of a complete family of 2.4” aperture matching downlights.
- 50° Cut Off, giving good visual comfort.
- Installation from below the ceiling for remodel and new construction.
- High efficiency clear textured lens deep set into cone cover.
- Integral or remote driver.
- White finish as standard.
- Mounts in 1/16" to 1" surface.
- Wet Location as standard option (WL).
- 74° symmetrical beam spread suitable for general illumination.
- Made in the USA
- 5-year Warranty

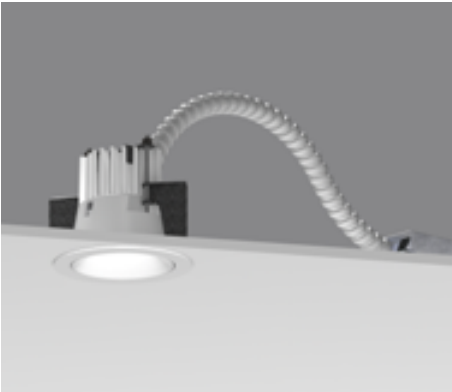

Housing	Die-caste aluminum for precision fit and heat dissipation 3/8" bezel trim compatible with installation from below into ACT, drywall and hard ceilings Quick-screw mounting mechanism EZ-Click Cover installation
Covers	Recessed conical reflector with 50 degree cut-off
LED	92CRI, 60+ lumens per watt delivered Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Optics	High angle symmetrical distribution
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

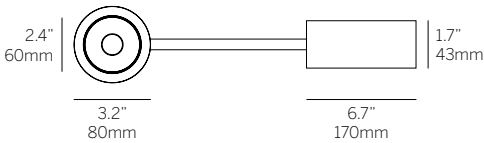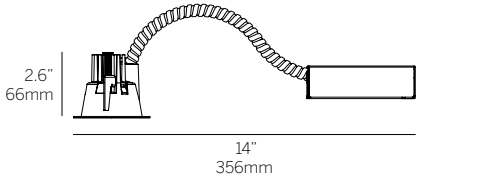

Standard housing

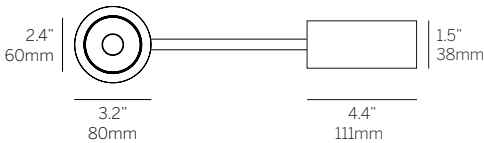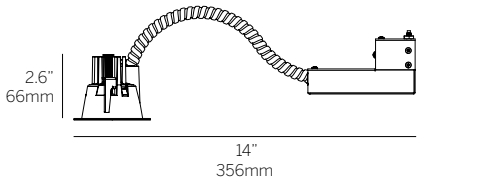

Shallow housing (SH)

2.4” General Downlight

Round Regressed Cone

Model	Fixation	Power ¹	CRI/CCT ^{2,3}	Driver ⁵	Lens	Trim Finish	Cone Finish	Options
WG-60RGDL	RBT	L M H	927 930 935 940	X S S010 SPH D010 PEQ1 PEQ0 DFPN	RRC	W (std) S ⁵ F	W (std) S ⁵ F	CP IC NC LP SH WL

Model

- WG-60RGDL = 2.4” General Downlight Round Regressed Cone

Fixation

- RBT = Recessed Bezel Trim

Power¹

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA

CRI/CCT^{2,3}

- 90+ CRI (Low/Medium/High Power)
- 927 = 2700K, (399/543/717 lm)
- 930 = 3000K, (429/584/771 lm)
- 935 = 3500K, (429/584/771 lm)
- 940 = 4000K, (459/625/826 lm)

Driver⁴

- X = Driver ordered separately

Integral

- S = Standard non-dim driver, 120-277V
- S010 = 0-10V >10% dimming, 120-277V
- SPH = Standard Phase Dimming, 120VAC (available in low and medium power only)

Remote

- D010 = EldoLED, 1%, 0-10V dimming, 120-277V
- PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC only

Lens

- RRC = Round regressed cone

Trim Finish

- W = White (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500⁵
- F = Custom finish (provide RAL code)

Cone Finish

- W = White, RAL 9010 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500⁵
- F = Custom finish (provide RAL code)

Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- SH = Reduces required plenum space to 3.5” (89mm) (available in low and medium power S, S010 and SPH drivers only)
- WL = Wet Location
- To specify multiple options, select the appropriate grouped codes from drop-down e.g. SH-WL

Emergency Remote Only

- Emergency LED battery backup available, order separately

Whitegoods reserves the right to change any information without prior notice.

Notes


- ¹ Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- ² Other lumen packages available, consult factory.
- ³ Delivered lumens shown. See photometry for additional details.
- ⁴ See power supply page for details.
- ⁵ See Tiger Drylac color chart: inter-lux.com/tiger




2.4” General Downlight

Round Wall Wash


- Part of a complete family of 2.4” aperture matching downlights.
 - Low brightness downlight for general illumination.
 - Installs from below the ceiling for new and retrofit installations.
 - Very shallow ceiling depth required for both integral and remote drivers.
 - Standard low luminance reflector finishes with matching trims and trimless.
- Quick-Snap feature for field-configurable multiple combinations.
 - EZ-Click Cover installation makes installing or changing Covers easy in the field.
 - Quick-screw mounting mechanism to sandwich the ceiling between the trim and housing for a secure installation.
 - Made in the USA
 - 5-year Warranty

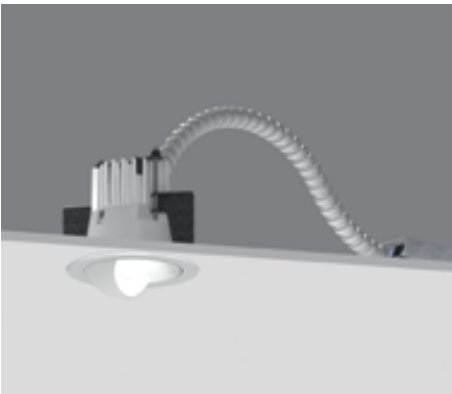

Housing	Die-caste aluminum for precision fit and heat dissipation 3/8” bezel trim compatible with installation from below into ACT, drywall and hard ceilings Quick-screw mounting mechanism EZ-Click Cover installation
Covers	Asymmetric reflector with room side cut-off
LED	92CRI, 60+ lumens per watt delivered Low/Mid/High output choices 2700K, 3000K, 3500K, 4000K
Optics	High angle symmetrical distribution
Driver	Integral and remote drivers for all dimming and non-dimming applications Through-wire integral driver enclosure installed from below without the need for bulky housing
Installation	Not required when using the Driver Enclosure
Housing	Optional: IC and Chicago plenum Optional: New construction (with j-box and driver attached) Optional: Landing pan for use with Driver Enclosure to locate cut-out locations
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location, CE, Wet Location rated

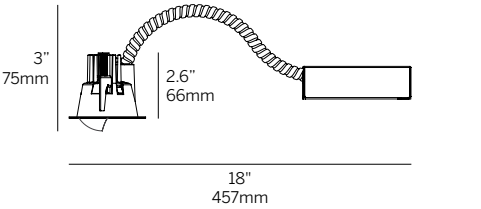

Standard housing

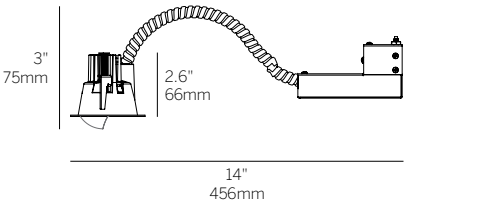

Shallow housing (SH)

2.4” General Downlight

Round Wall Wash

Model	Fixation	Power ¹	CRI/CCT ^{2,3}	Driver ⁵	Lens	Trim Finish	Cone Finish	Options
WG-60RGDL	RBT	L M H	927 930 935 940	X S S010 SPH D010 PEQ1 PEQ0 DFPN	RWW	W (std) S F	W (std) S ⁵ F	CP IC NC LP SH WL

Model

- WG-60RGDL = 2.4” General Downlight Round Wall Wash

Fixation

- RBT = Recessed Bezel Trim

Power¹

- L = Low Power, 5.9W @ 350mA
- M = Mid Power, 8.6W @ 500mA
- H = High Power, 12.4W @ 700mA

CRI/CCT^{2,3}

- 90+ CRI (Low/Mid/High Power)
- 927 = 2700K, (364/495/654 lm)
- 930 = 3000K, (392/533/704 lm)
- 935 = 3500K, (392/533/704 lm)
- 940 = 4000K, (419/571/753 lm)

Driver⁴

- X = Driver ordered separately

Integral

- S = Standard non-dim driver, 120-277V
- S010 = 0-10V >10% dimming, 120-277V
- SPH = Standard Phase Dimming, 120VAC (available in low and medium power only)

Remote

- D010 = EldoLED, 1%, 0-10V dimming, 120-277V
- PEQ1 = Lutron Hi-lume 1% EcoSystem, 120-277V
- PEQ0 = Lutron Hi-lume Premier 0.1% EcoSystem, 120-277V
- DFPN = Lutron Forward Phase 1%, 120VAC only

Lens

- RWW = Round wall wash

Trim Finish

- W = White (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500⁵
- F = Custom finish (provide RAL code)

Cone Finish

- W = White, RAL 9010 (standard)
- S = Silver, 15% gloss, Tiger Drylac 49/90500⁵
- F = Custom finish (provide RAL code)

Options

- CP = Chicago Plenum Housing
- IC = Insulated Ceiling Housing
- NC = New Construction Housing
- LP = Landing Pan (specify for Acoustic Ceiling Tile installation)
- SH = Reduces required plenum space to 3.5” (89mm) (available in low and medium power S, S010 and SPH drivers only)
- WL = Wet Location

Emergency Remote Only

- Emergency LED battery backup available, order separately

Whitegoods reserves the right to change any information without prior notice.

Notes

- ¹ Wattage shown does not include power supplies/drivers. System wattage adds 10-20%.
- ² Other lumen packages available, consult factory.
- ³ Delivered lumens shown. See photometry for additional details.
- ⁴ See power supply page for details.
- ⁵ See Tiger Drylac color chart: inter-lux.com/tiger

Design Guide


We have provided performance data and characteristics for Whitegoods luminaires, as well as providing expected light levels for typical scenarios based on set parameters. The results are intended as a handy reference to help the specifier plan their project quickly, efficiently and with confidence.

We have taken the most common uses of each luminaire type, set distances and heights based on typical situations and calculated the results. Then, we vary the parameters a little either way so that you can decide for yourself the best option for your particular requirement.



4" ProTools Single Downlight - Performance

WG 100SPTD, WG 100RPTD, WG 100SPTDL, WG 100RPTDL, WG 100SPTDLX, WG 100RPTDLX

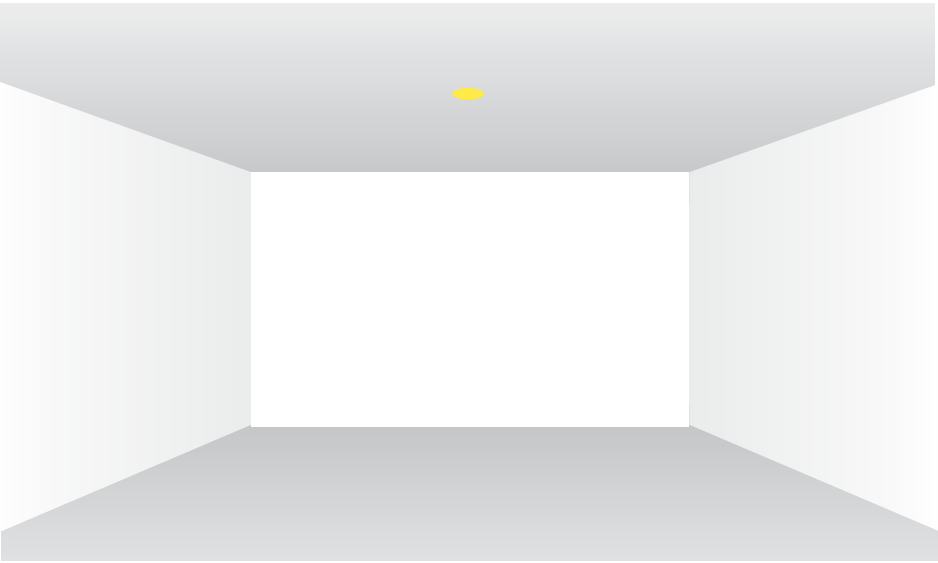


The ProTools series offers Plaster Trim and Bezel Trim fixed, wall wash and adjustable downlights with various cover options and accessories creating a flexible and versatile range of luminaires with a single consistent minimal appearance throughout.

A downlight can be used to deliver general light over a broad area, or a focused beam of concentrated light. Suitable for general area lighting in single units, grid patterns or groups as well as focused lighting and task oriented application.

This design guide provides the average light levels and beam spread which can be expected at task and floor level from a single downlight at the ceiling heights shown, and relative to the performance of each luminaire.

Average Light Levels

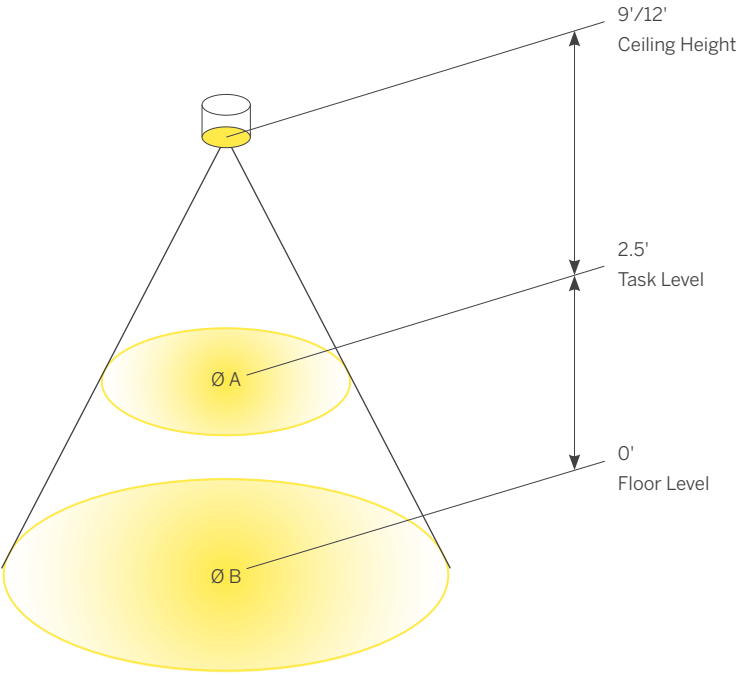

The diagram shows the average light level achieved, across an area the size shown, at the given distance from a single luminaire.

Product Code	Beam Spread	
WG 100SPTD, WG 100RPTD	-	90°
WG 100SPTDL, WG 100RPTDL	-	16°
	-	32°
	-	41°
WG 100RPTDLX, WG 100RPTDLX	-	16°
	-	32°
	-	41°
	-	8°

Refer to the diagram on the left, select your luminaire, ceiling height and distance, and read off the light level achieved in the table below.

Calculated on the following basis:

Reflectances

Ceiling 70%
Walls 50%
Floor 20%

Maintenance factor

1.0


LED

High Power
3000 Kelvin
90 CRI

How to create 'Even Illumination' in a space:

The beam angle of a single luminaire is defined by its Half Peak Intensity*. We can use this to create even illumination in a space.

Arrange luminaires equally. Use the center of the luminaire as a base and ensure that neighboring beam spreads touch or slightly overlap.




*The point at which the beam reaches half of the intensity relative to the center of its beam.

Calculation Results

Fixtures	Power	Beam	Accessory	Ceiling Height	Ø A	Task Level (2.5') Average	Ø B	Floor Level (0') Average
WG 100SPTD, WG 100RPTD	1512lm*	90°	Flush Lens	9.0'	Ø 13'	6.4 fc	Ø 18'	3.7 fc
				12.0'	Ø 19'	3.1 fc	Ø 24'	2.1 fc
WG 100SPTDL, WG 100RPTDL, WG 100SPTDLX, WG 100RPTDLX	2027lm*	16°	Open Aperture	9.0'	Ø 1.8'	102 fc	Ø 2.5'	54 fc
				12.0'	Ø 2.7'	49 fc	Ø 3.4'	31 fc
		32°	Open Aperture	9.0'	Ø 4.2'	33 fc	Ø 5.8'	18 fc
				12.0'	Ø 6.2'	16 fc	Ø 7.8'	11 fc
		41°	Open Aperture	9.0'	Ø 5'	24 fc	Ø 6.7'	13 fc
				12.0'	Ø 7.1'	12 fc	Ø 8.9'	8 fc
WG 100SPTDLX, WG 100SPTDLX	1638lm*	8°	Glare Shield/ Snoot	9.0'	Ø 0.9'	277 fc	Ø 1.2'	149 fc
				12.0'	Ø 1.3'	132 fc	Ø 1.7'	82 fc


Values in Foot Candles

4" ProTools D Downlight All Covers		4" ProTools DL Downlight All Covers		4" ProTools DL Adjustable All Covers		4" ProTools DLX Adjustable All Covers	
Product Details	38-49	Product Details	50-57	Product Details	58-69	Product Details	74-109



4" ProTools Multiple Downlight - Grid Set Out

WG 100SPTD, WG 100RPTD, WG 100SPTDL, WG 100RPTDL, WG 100SPTDLX, WG 100RPTDLX

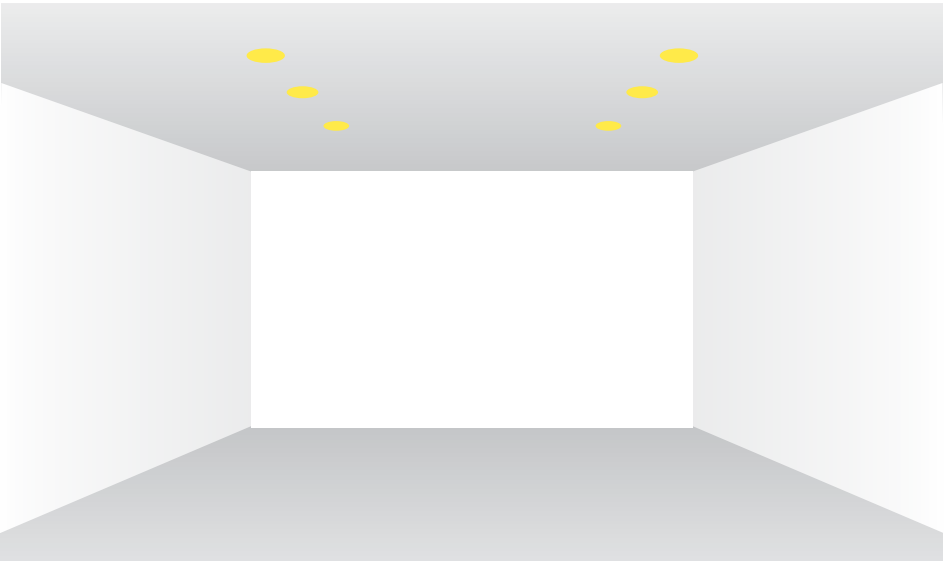

Plaster Trim and Bezel Trim fixed, wall wash and adjustable downlights with various cover options and accessories creating a flexible and versatile range of luminaires with a single consistent minimal appearance throughout.

A downlight can be used to deliver general light over a broad area, or a focused beam of concentrated light. Suitable for general area lighting in single units, grid patterns or groups as well as focused lighting and task oriented application.

This design guide provides the average light levels which can be expected at floor level from a grid of downlights at the ceiling heights shown, and relative to the performance of each luminaire.

Refer to the diagram on the left, select your luminaire, ceiling height and set out, and read off the light level achieved in the table below.

Calculated in a 20'x20' room size and on the following basis:

Reflectances

Ceiling 70%
Walls 50%
Floor 20%

Maintenance factor

1.0

LED

High Power
3000 Kelvin
90 CRI

Light Levels

				The diagram and table can be read to establish light levels achieved when luminaires are set out at the dimensions indicated, at the ceiling heights shown.			
Product Code		Beam Spread					
WG 100SPTD, WG 100RPTD		-	90°				
WG 100SPTDL, WG 100RPTDL		-	32°				
		-	41°				
WG 100SPTDLX, WG 100RPTDLX		-	32°				
		-	41°				
				X = luminaire spacing center to center Y = distance between rows			

4" ProTools D Downlight All Covers		4" ProTools DL Downlight All Covers		4" ProTools DL Adjustable All Covers		4" ProTools DLX Adjustable All Covers	
Product Details	38-49	Product Details	50-57	Product Details	58-69	Product Details	74-109

Calculation Results


Fixtures	Power	Beam	Accessory	Ceiling Height	Y	X Average Light Levels (fc)		
						4.0'	6.0'	8.0'
						4.0'	6.0'	8.0'
WG 100SPTD, WG 100RPTD	1512lm*	90°	Flush Lens	9.0'	4.0'	46	38	34
						38	32	28
						34	28	25
				12.0'	4.0'	35	30	27
						30	27	23
						27	23	21
WG 100SPTDL, WG 100RPTDL, WG 100SPTDLX, WG 100RPTDLX	2027lm*	32°	Open Aperture	9.0'	4.0'	33	32	29
						32	30	28
						30	28	26
				12.0'	4.0'	30	29	27
						29	28	26
						27	26	24
		41°	Open Aperture	9.0'	4.0'	32	31	28
						30	29	27
						28	27	25
				12.0'	4.0'	29	28	25
						28	26	24
						25	24	22



Values in Foot Candles

4" ProTools D Downlight - High Angle Illumination

WG 100SPTD, WG 100RPTD

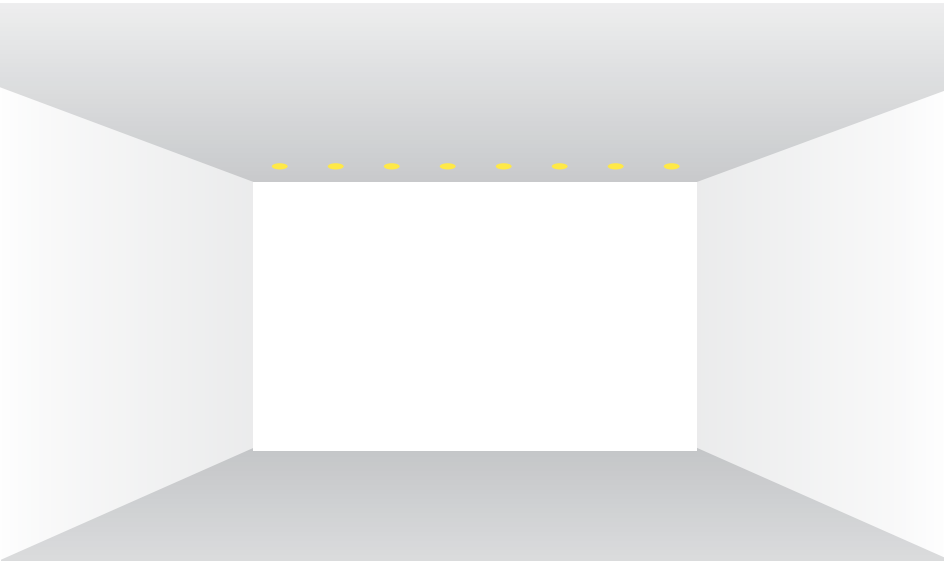


The ProTools D is a versatile luminaire with various trim, diffuser and cover options. When specified with a flush Satin Opal Diffuser, it has excellent high angle lighting performance. Although it is not intended as a dedicated wall wash luminaire, it can provide excellent illumination to nearby vertical surfaces as well as providing excellent ambient light throughout a space.

In this Design Guide, we provide you with all the information you need to work out exactly how much light can expect to deliver to a wall and floor below, relative to the distance from the surface and the center to center spacings of the luminaires.

Angle of Illumination / High Angle Lighting Performance


WG 100SPTD, WG 100RPTD

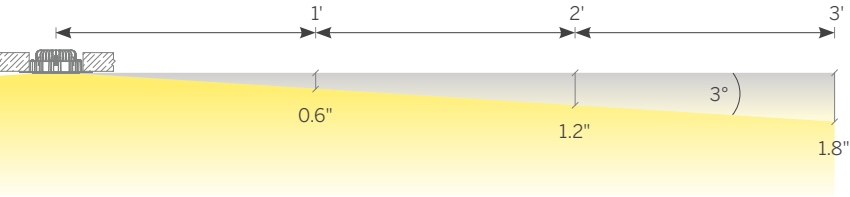

The diagrams show the point at which the contrast between the lit and the unlit perpendicular surface occurs as a soft transition line, at various distances from the luminaire.


Values in feet & inches

9' Ceiling, Typical 36" Offset, 36" Luminaire Spacing

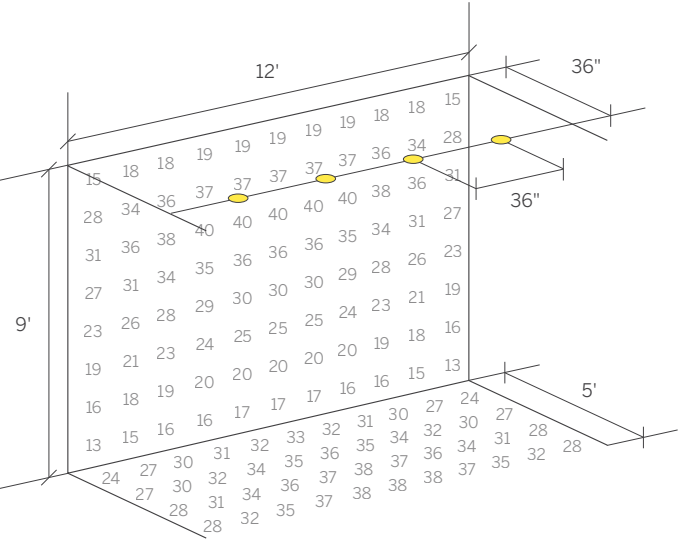

This page shows typical offsets and luminaire spacings and the resulting illumination which can be expected on the wall and floor. The following page shows results at different offsets and luminaire spacings.

12' Ceiling, Typical 36" Offset, 36" Luminaire Spacing

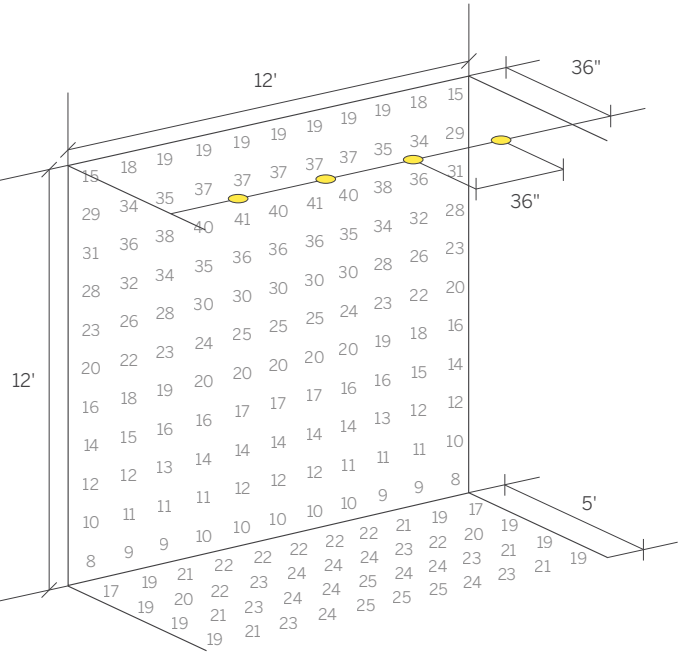

Values in Foot Candles

Calculated on the following basis:


Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	1512lm*	Custom Micro-Prismatic Wash
Walls 50%		3000	Lens
Floor 20%		Kelvin	

index	4" ProTools D Downlight All Covers	
	Product Details	38-49


4" ProTools D Downlight - High Angle Illumination

WG 100SPTD, WG 100RPTD

9' Ceiling, Optimal 24" Offset,
24" Luminaire Spacing

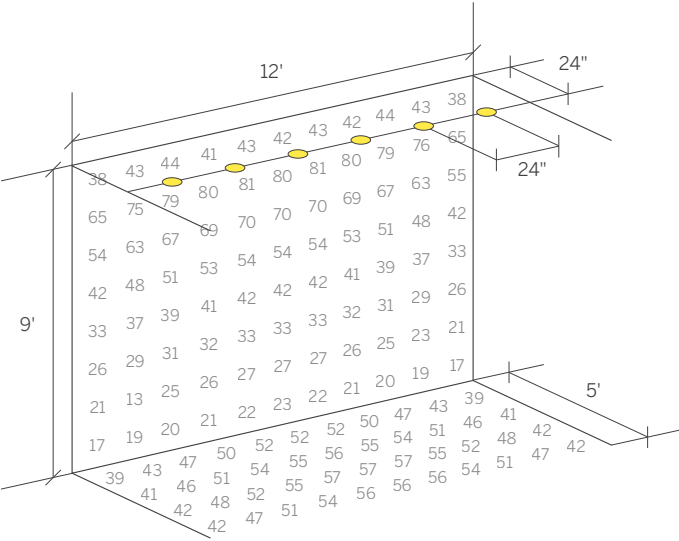


12' Ceiling, Optimal 24" Offset,
24" Luminaire Spacing

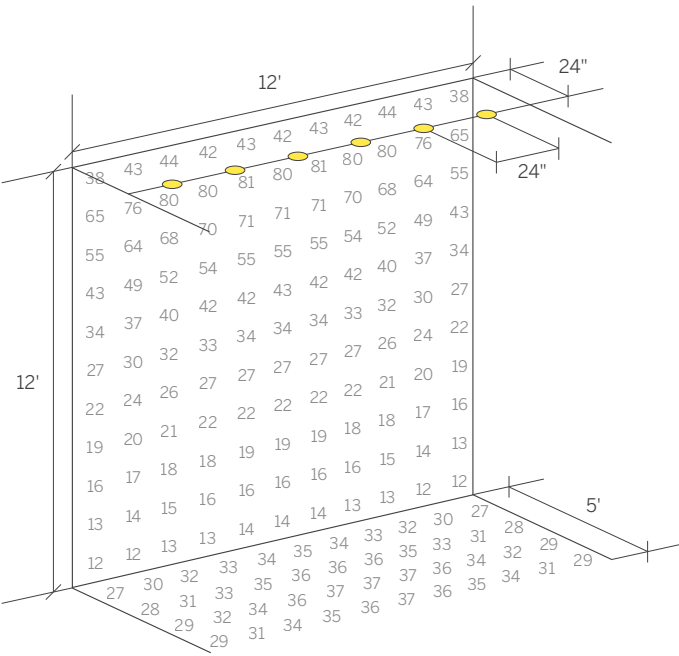


Values in Foot Candles

9' Ceiling, Optimal 30" Offset,
30" Luminaire Spacing

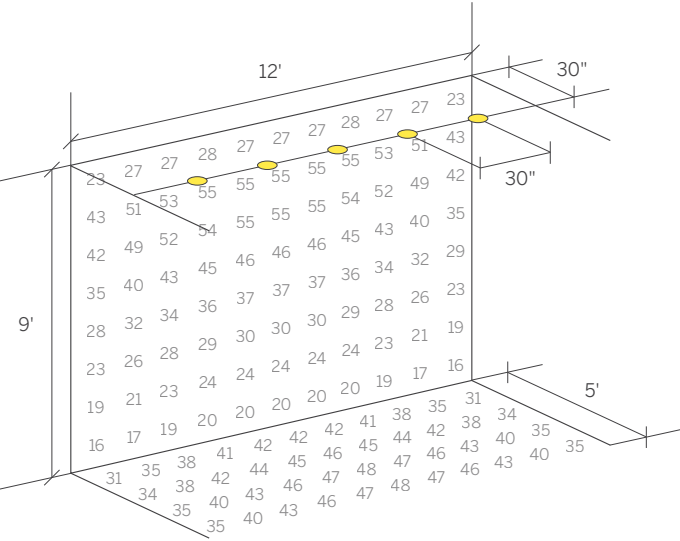

12' Ceiling, Optimal 30" Offset,
30" Luminaire Spacing

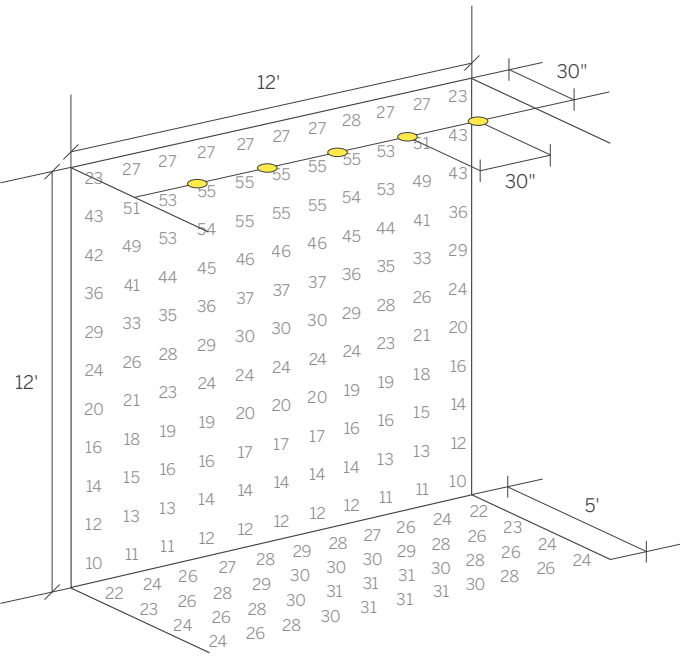


Values in Foot Candles

This page shows what we feel are the optimal offsets and luminaire spacings to achieve even illumination.

Calculated on the following basis:

Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	1512lm*	Custom Micro-Prismatic Wash
Walls 50%		3000	Lens
Floor 20%		Kelvin	




4" ProTools D Downlight
All Covers

Product Details38-49

4" ProTools DL Wall Wash


WG 100SPTDLWW-RPT, WG 100SPTDLWW-RBT, WG 100RPPTDLWW-RPT, WG 100RPPTDLWW-RBT

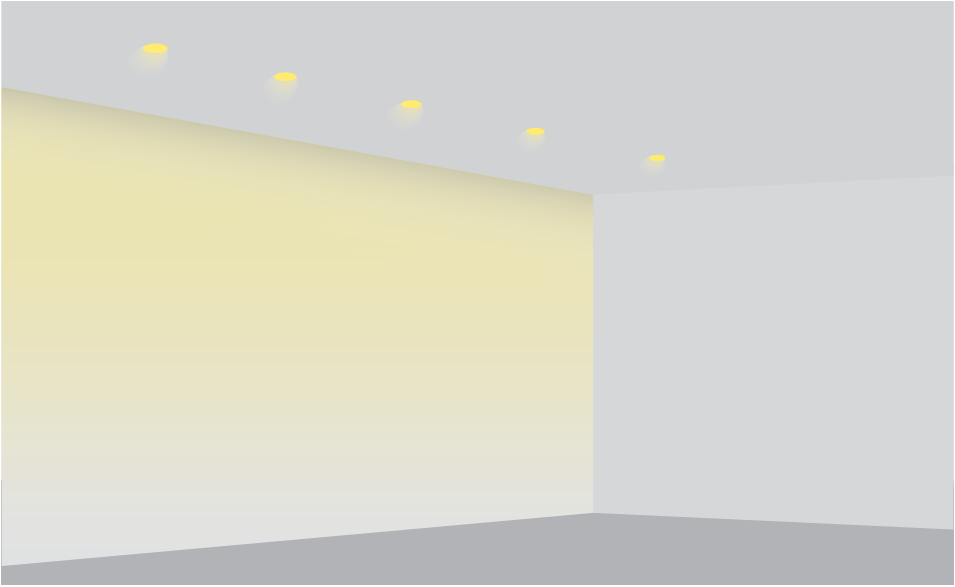

ProTools DL Wall Wash offers round and square dedicated wall wash luminaires for even illumination of a surface. They emit a wide, even beam of light which is directed towards the wall. Washlights need to be correctly positioned, both in terms of distance from the wall, and their relative distance to one another. This guide will help you get the best result.

The golden rule is 1:1 spacing between luminaires, set to match the distance they are offset from the surface to be lit. And that offset distance should ideally be one third of the overall surface height.

Of course, at Whitegoods we understand that constraints of modern construction requirements and commercial consideration mean that it is not always practical to apply these parameters. Therefore we have designed our wall wash luminaires to work as well as possible even when mounted close to the wall.


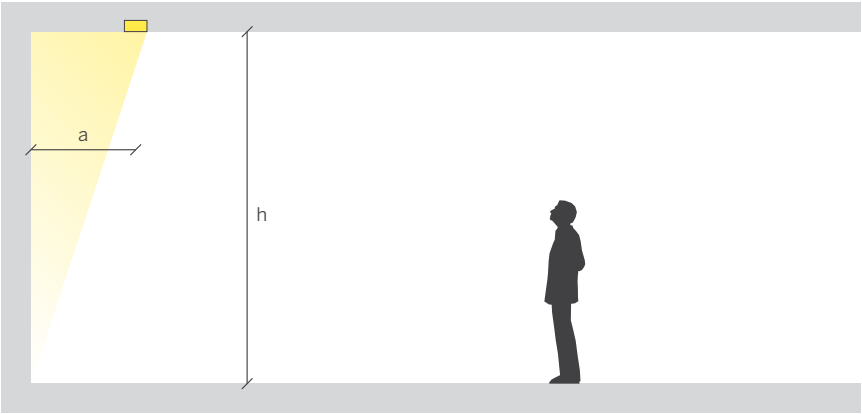


The height of the wall to be lit (h) will determine the best distance at which to position wall wash luminaires. A good 'rule of thumb' is to offset them by approximately one third of the wall height.

For optimum wall washing results use a 1:1 ratio between the offset (a) from the wall and the 'on center' luminaire spacings (b).

e.g. - if the wall is 9' high, then the luminaires will ideally be 3' away from the wall surface, so set them out at 3' on center - i.e. with 3' between each luminaire.

Also, where the wall meets an adjacent surface, space the last luminaire half the set out distance (b¹).

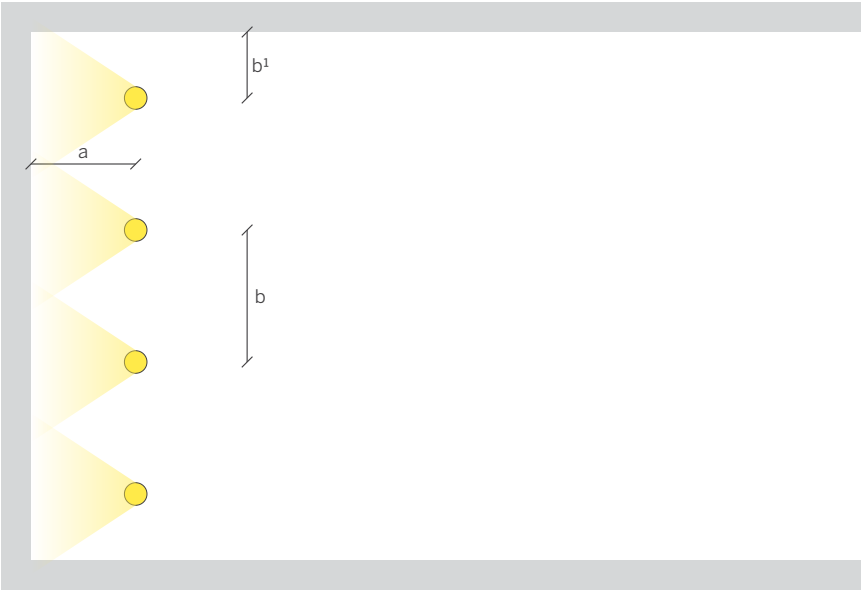


4" ProTools DL Wall Wash
All Covers

Product Details


70-73

12' Ceiling, 36" Offset,
36" Luminaire Spacing

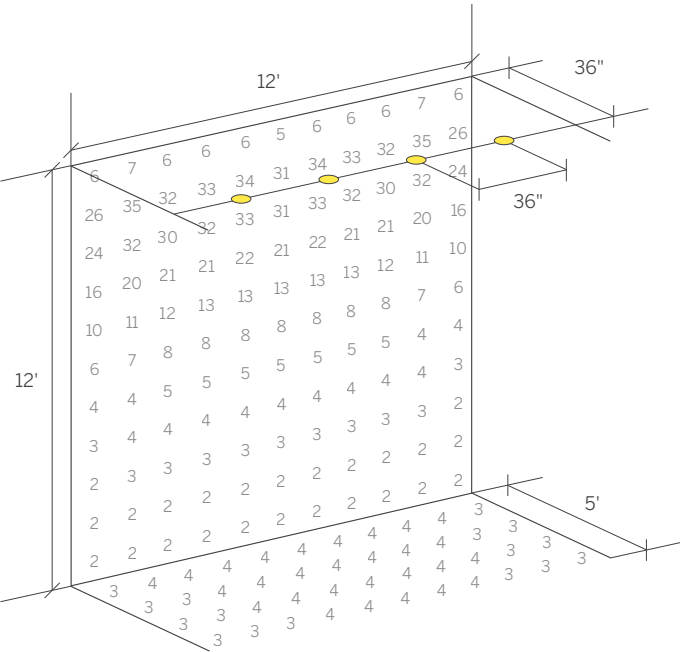


This page shows what we feel are the optimal offsets and luminaire spacings to achieve even illumination. The following page shows results at different offsets and luminaire spacings.

12' Ceiling, 24" Offset,
24" Luminaire Spacing

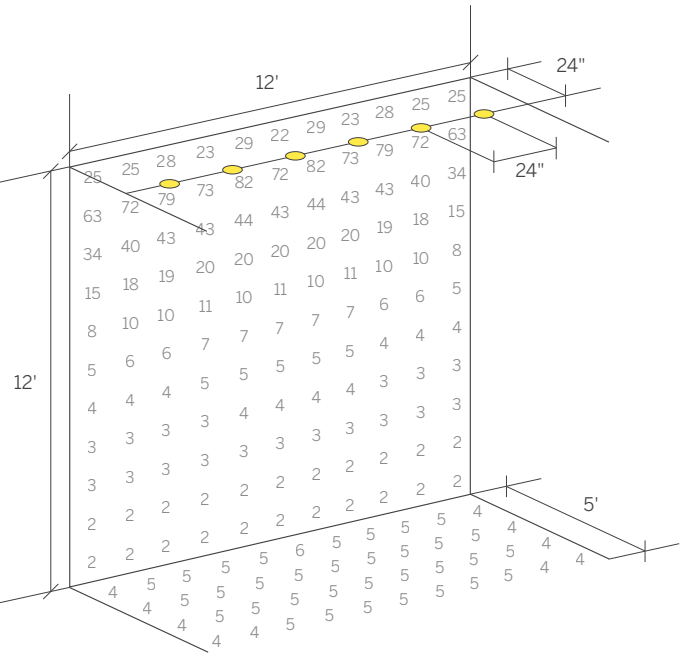

12' Ceiling, 18" Offset,
18" Luminaire Spacing

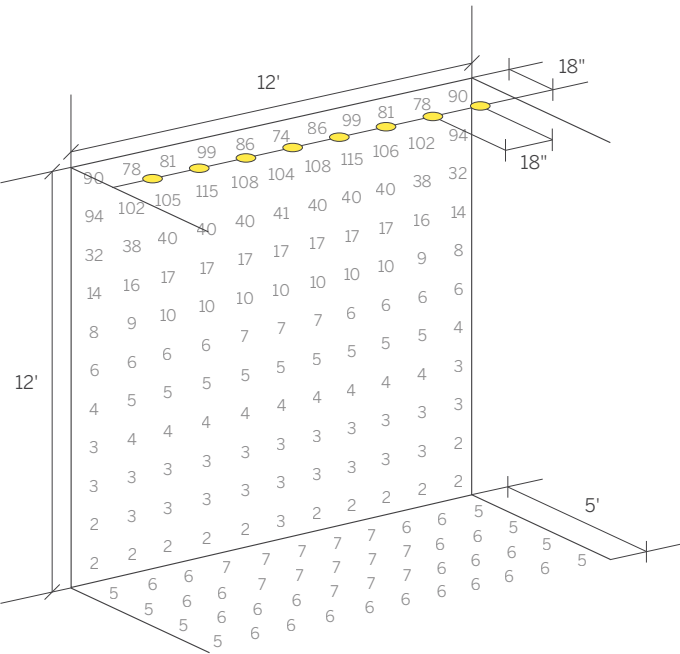

Values in Foot Candles

Calculated on the following basis:


Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	2027lm*	Custom Micro-prismatic wash
Walls 50%		3000	lens
Floor 20%		Kelvin	

*Lumen data correct at the time of print. Source lumens shown. For up to date lumen data refer to specsheet.


4" ProTools DL Wall Wash

WG 100SPTDLWW-RPT, WG 100SPTDLWW-RBT, WG 100RPTDLWW-RPT, WG 100RPTDLWW-RBT


12' Ceiling, 36" Offset,
48" Luminaire Spacing

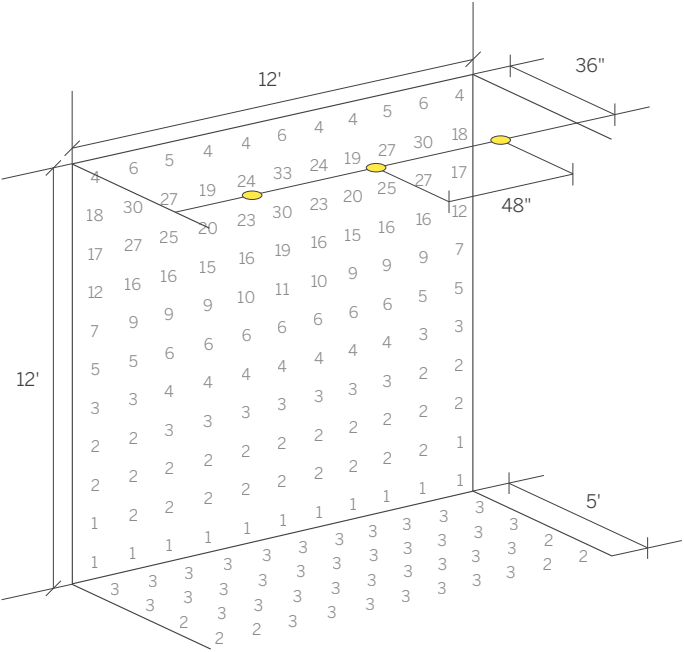


12' Ceiling, 24" Offset,
36" Luminaire Spacing

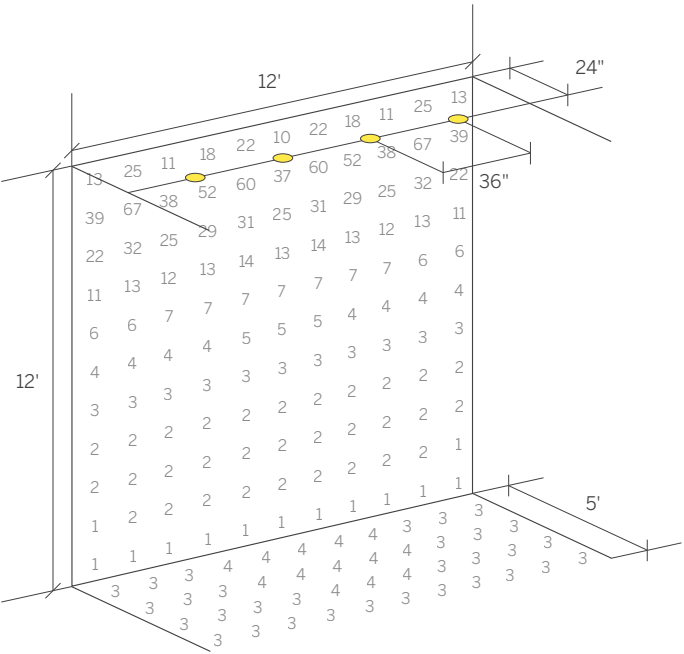


12' Ceiling, 18" Offset,
24" Luminaire Spacing

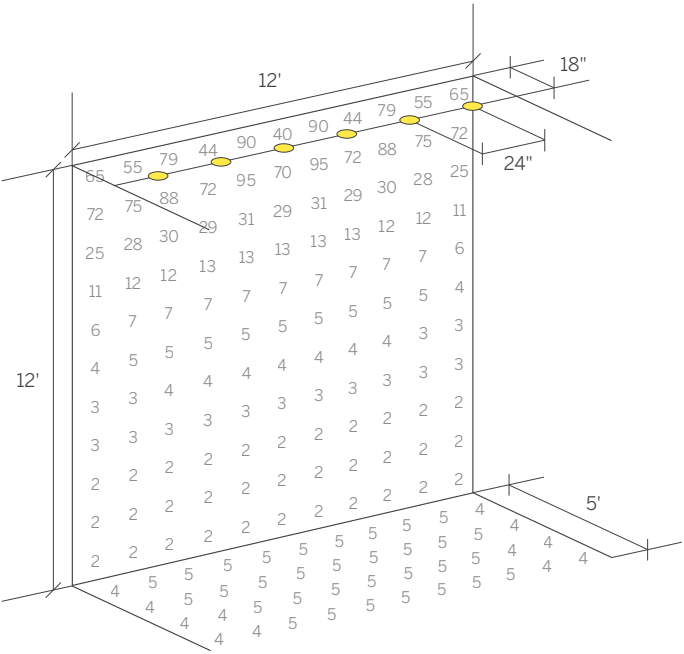


12' Ceiling, 36" Offset,
64" Luminaire Spacing

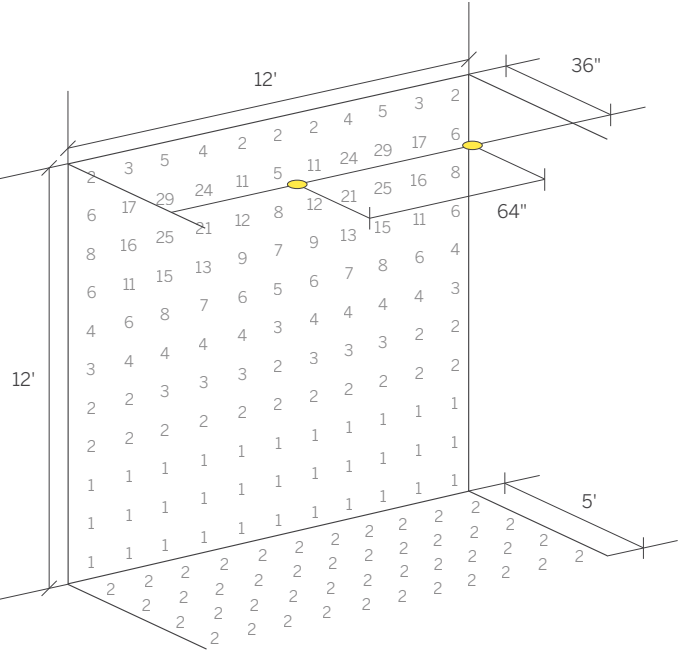

12' Ceiling, 18" Offset,
36" Luminaire Spacing

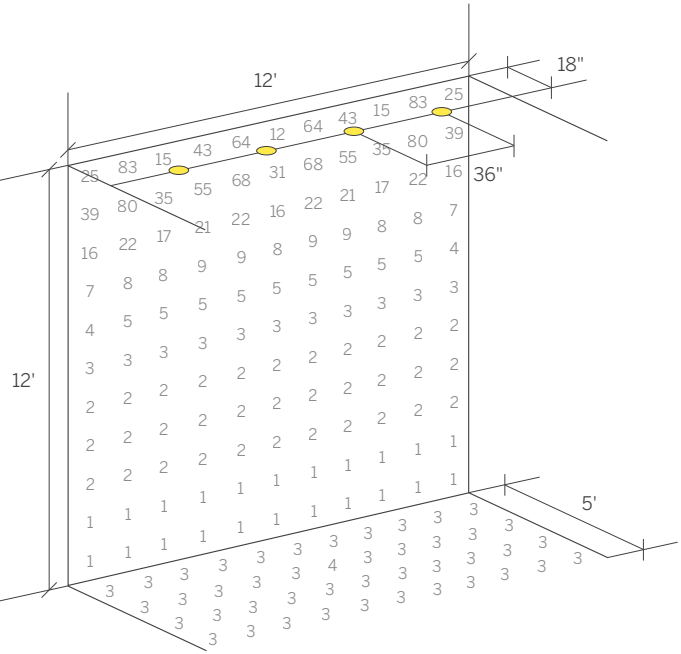

12' Ceiling, 24" Offset,
48" Luminaire Spacing

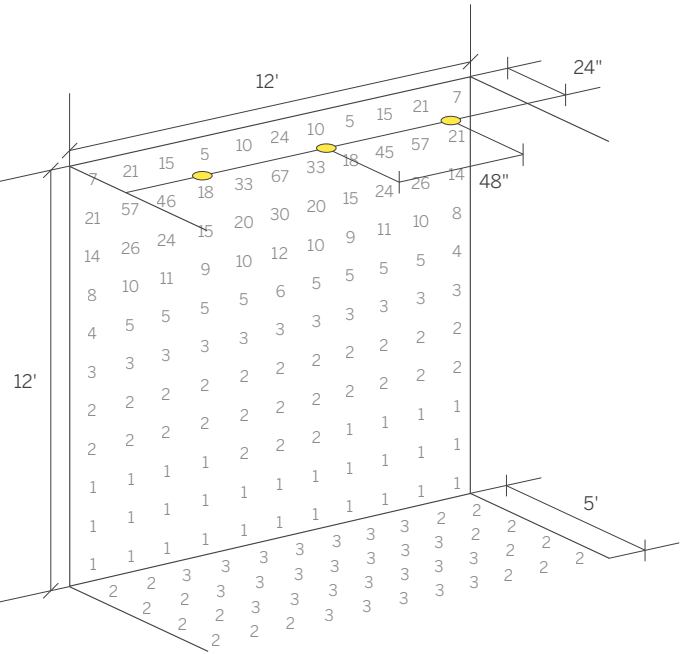

Values in Foot Candles


Values in Foot Candles

Calculated on the following basis:

Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	2027lm*	Custom Micro-prismatic wash
Walls 50%		3000	lens
Floor 20%		Kelvin	

2.4" General Downlight Regressed Cone - Performance

WG 60RDL-RBT-RC

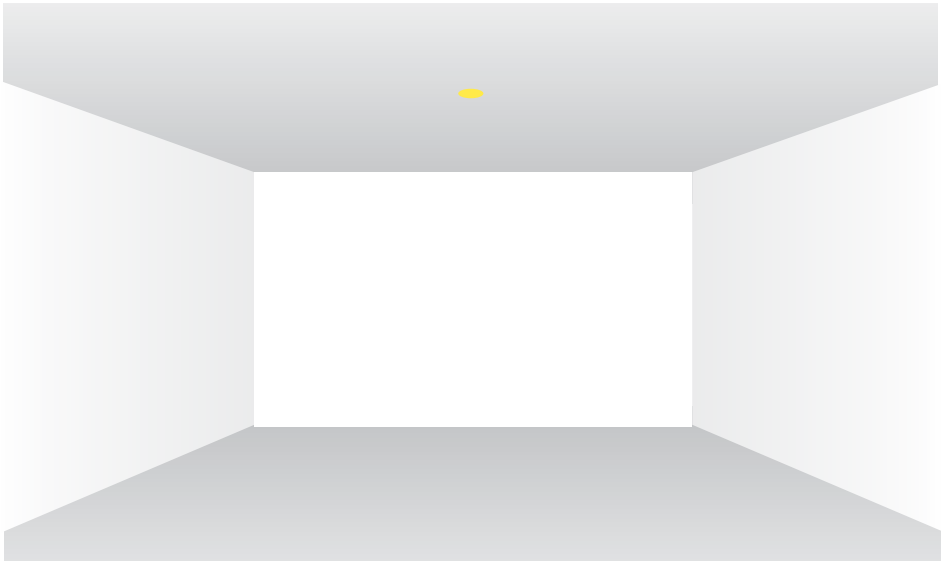

Bezel Trim fixed downlights with various cover options for regressed lens, flush lens and wall wash.

A fixed downlight can be used to deliver general light over a broad area (with a flush lens for example), or a more focused beam of light (from the regressed lens).

The GDL family of luminaires has been developed to offer simple and cost effective lighting wherever it is needed. Simple to install and with simple aesthetics, it's a luminaire which gets the job done with the minimum of fuss.

We have provided here performance data based on the most popular and versatile option: the Regressed Cone.

Refer to the diagram on the left, select your luminaire, ceiling height and distance, and read off the light level achieved in the table below.

Calculated on the following basis:

Reflectances

Ceiling 70%

Walls 50%

Floor 20%

Maintenance factor

1.0


LED

Medium Power

3500 Kelvin


80 CRI

How to create 'Even Illumination' in a space:




The beam angle of a single luminaire is defined by its Half Peak Intensity*. We can use this to create even illumination in a space.

Arrange luminaires equally. Use the center of the luminaire as a base and ensure that neighboring beam spreads touch or slightly overlap.



*The point at which the beam reaches half of the intensity relative to the center of its beam.

Average Light Levels

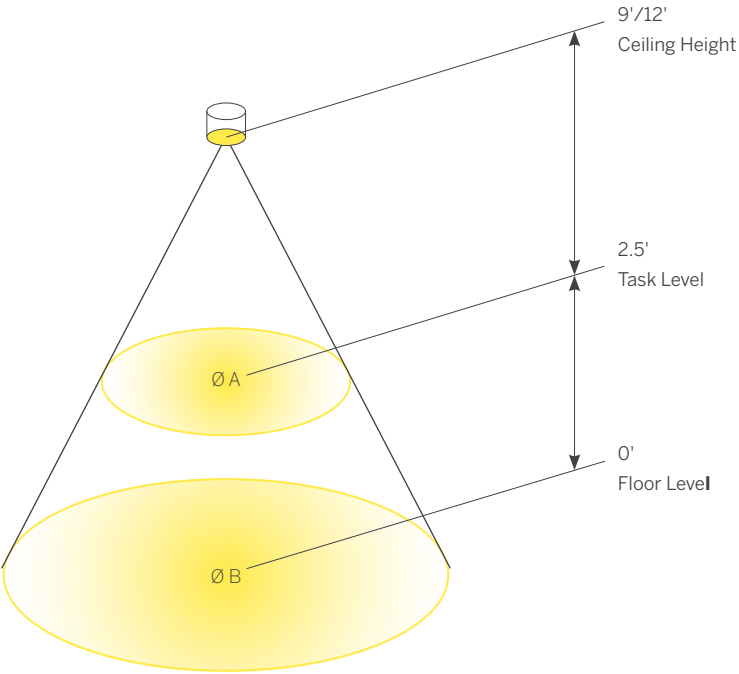

The diagram shows the average light level achieved, across an area the size shown, at the given distance from a single luminaire.

Product Code	Beam Spread
WG 60RGDL-RBT-RC -	74°

Calculation Results

Fixtures	Power	Beam	Accessory	Ceiling Height	Ø A	Task Level (2.5') Average	Ø B	Floor Level (0') Average
WG 60RGDL-RBT-RC	965lm*	74°	ClearTextured Lens	9.0'	Ø 9'	5.3 fc	Ø 13'	2.6 fc
				12.0'	Ø 14'	3.0 fc	Ø 18'	1.6 fc

Values in Foot Candles


2.4" General Downlight Round Regressed Cone

Product Details

148

2.4" General Downlight Multiple Luminaire - Grid Set Out

WG 60RDL-RBT-FD, WG 60RDL-RBT-RC

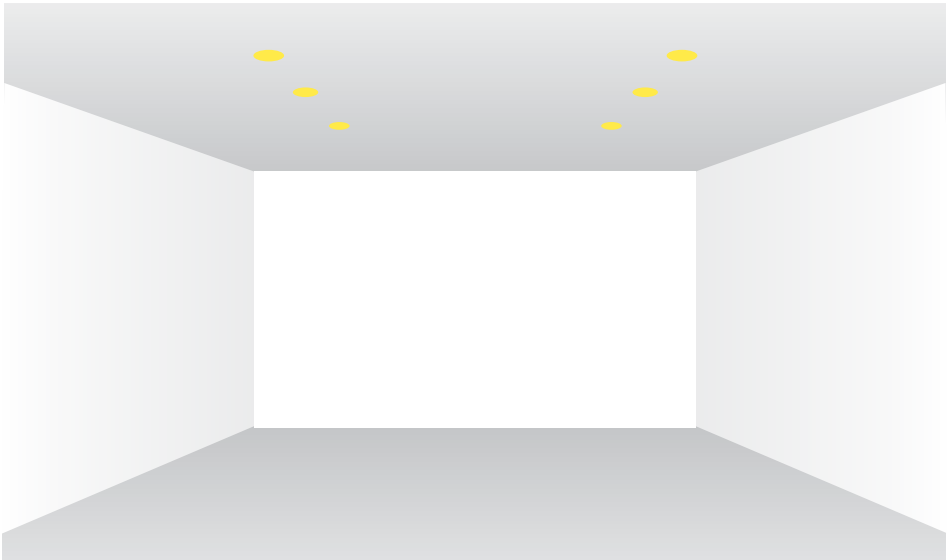

Bezel Trim fixed downlights with various cover options and accessories.

A fixed downlight can be used to deliver general light over a broad area, or a focused beam of 'concentrated' light.

They can be used for general area lighting in single units, grid patterns or groups.

Wider beams will give a more even, calm light, narrow beams will give a more dramatic mood.

Refer to the diagram on the left, select your luminaire, ceiling height and spacing, and read off the light level achieved in the table below.

Calculated in a 20'x20' room size and on the following basis:

Reflectances

Ceiling 70%

Walls 50%

Floor 20%

Maintenance factor

1.0


LED

Medium Power

3500 Kelvin

80 CRI

Light Levels

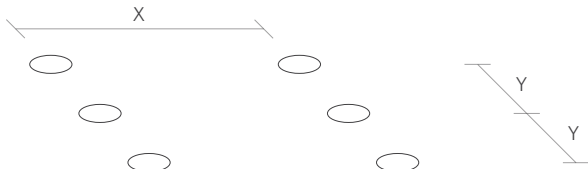

The diagram and table can be read to establish light levels achieved when luminaires are set out at the dimensions indicated, at the ceiling heights shown.

Product Code		Beam Spread
WG 60RDL-RBT-FD	-	Lambertian
WG 60RDL-RBT-RC	-	74°

X = luminaire spacing center to center
Y = distance between rows

Calculation Results

Fixtures	Power	Beam	Accessory	Ceiling Height	Y	X		
						Average Light Levels (fc)		
						4.0'	6.0'	8.0'
WG 60RDL-RBT-FD	965lm*	Lambertian	Flush Satin Opal Diffuser	9.0'	4.0'	15	13	11
						13	11	10
						11	10	8
				12.0'	4.0'	11	10	9
						10	9	8
						9	8	7
					6.0'			
WG 60RDL-RBT-RC	965lm*	74°	Clear Textured Lens	9.0'	4.0'	22	18	15
						18	14	12
						15	12	10
				12.0'	4.0'	18	14	13
						14	12	10
						13	10	9
					6.0'			

Values in Foot Candles

2.4" General Downlight Round Flush Diffuser


Product Details 146

2.4" General Downlight Round Regressed Cone

Product Details 148

2.4" General Downlight Flush - High Angle Illumination

WG 60RDL-RBT-FD

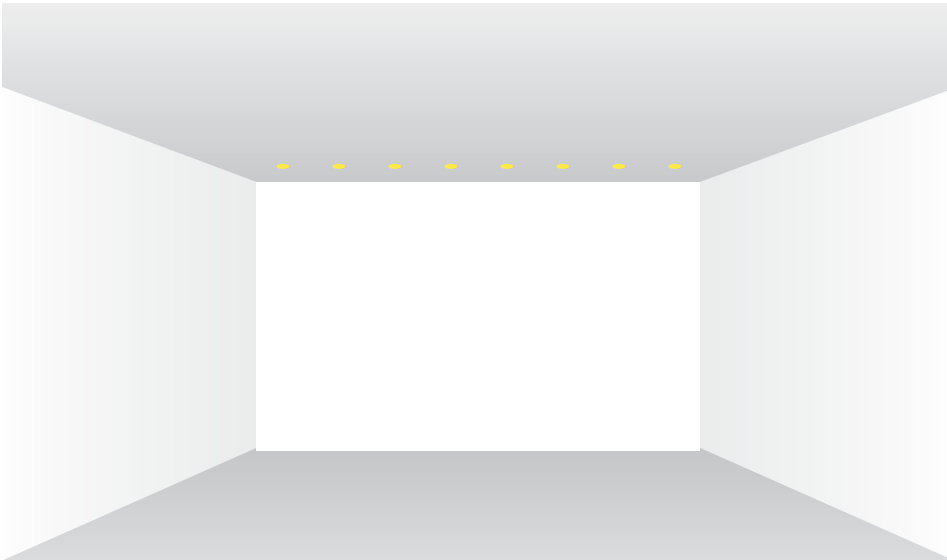


GDL Flush is a versatile luminaire with a Satin Opal diffuser which is flush with the ceiling line.

The Flush Diffuser provides excellent high angle light characteristics. Although it is not intended as a dedicated wall wash luminaire, it can provide good illumination to nearby vertical surfaces as well as providing excellent ambient light throughout a space.

This design guide provides all the information needed to work out exactly how much light can expected to be delivered to a wall and the floor below, relative to the distance from the wall surface, and the center to center spacings of the luminaires.

Angle of Illumination / High Angle Lighting Performance


WG 60RDL-RBT-FD

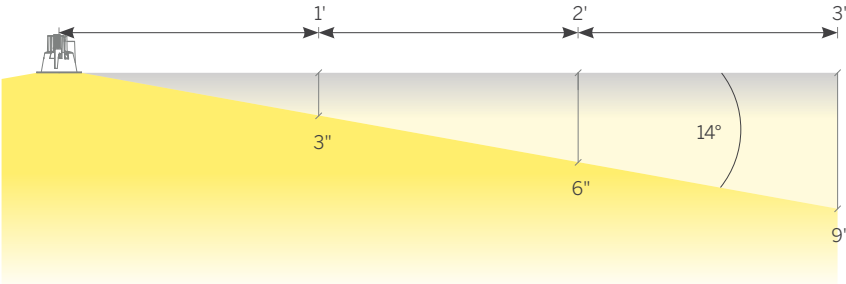

The diagrams show the point at which the contrast between the lit and the unlit vertical surface occurs as a soft transition line, at various distances from the luminaire.


Values in feet & inches

9' Ceiling, Typical 36" Offset, 36" Luminaire Spacing

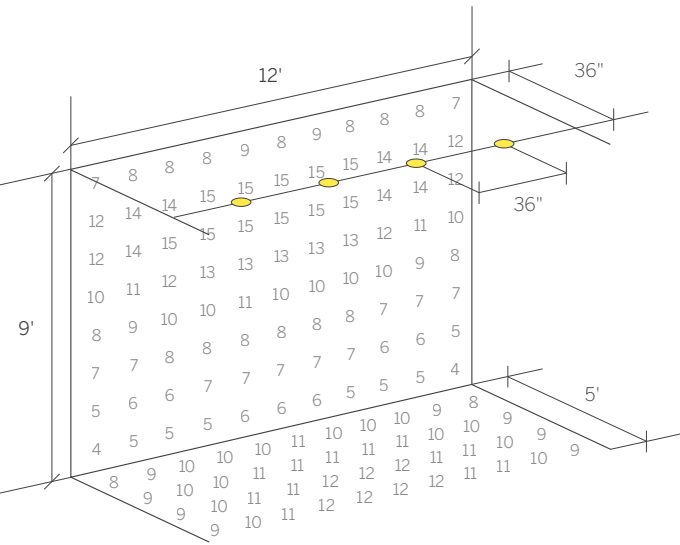

This page shows typical offsets and luminaire spacings and the resulting illumination which can be expected on the wall and floor. The following page shows results at different offsets and luminaire spacings.

12' Ceiling, Typical 36" Offset, 36" Luminaire Spacing

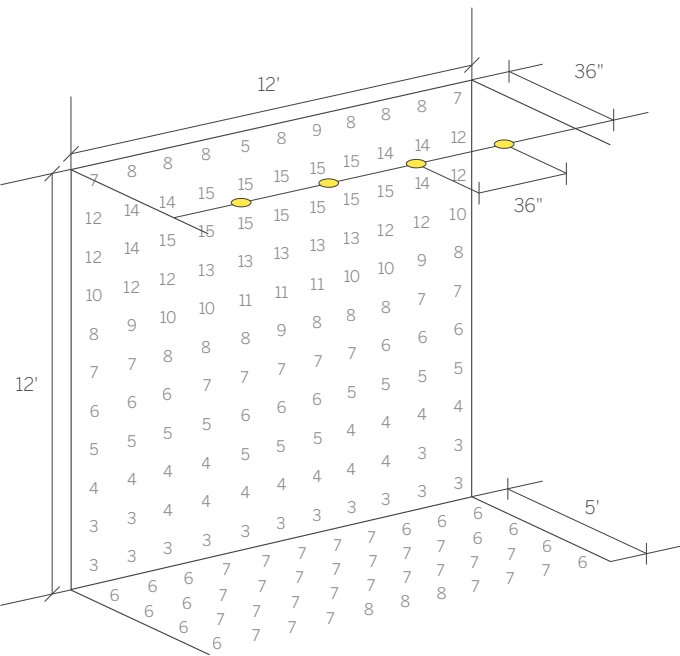

Values in Foot Candles


Calculated on the following basis:

Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	965lm*	Flush Frosted
Walls 50%		3500	
Floor 20%		Kelvin	


2.4" General Downlight Flush - High Angle Illumination

WG 60RDL-RBT-FD

9' Ceiling, Optimal 24" Offset,
24" Luminaire Spacing

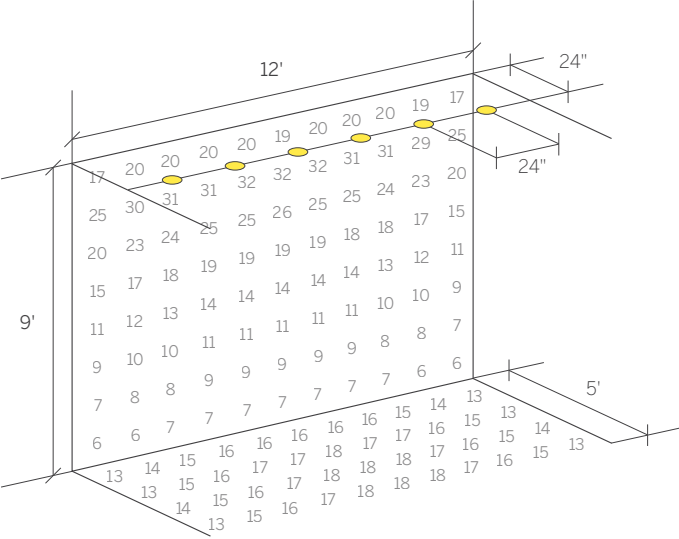


12' Ceiling, Optimal 24" Offset,
24" Luminaire Spacing

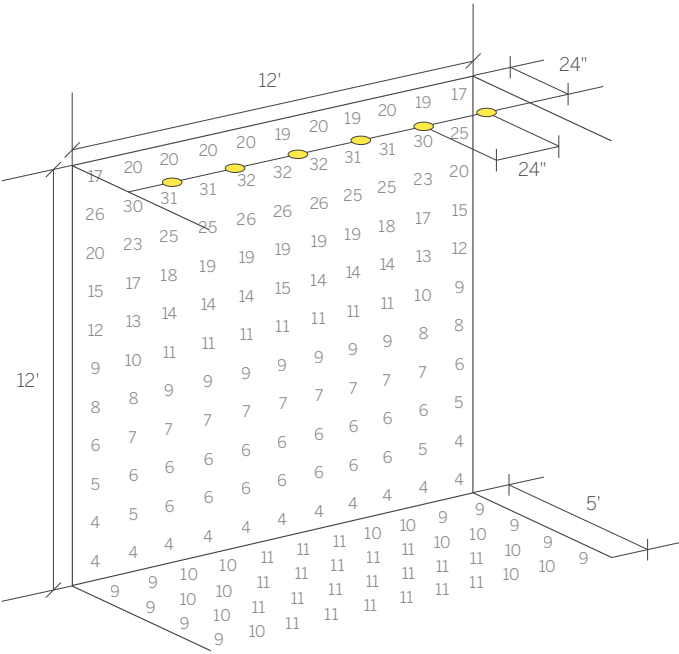


Values in Foot Candles

9' Ceiling, Optimal 30" Offset,
30" Luminaire Spacing

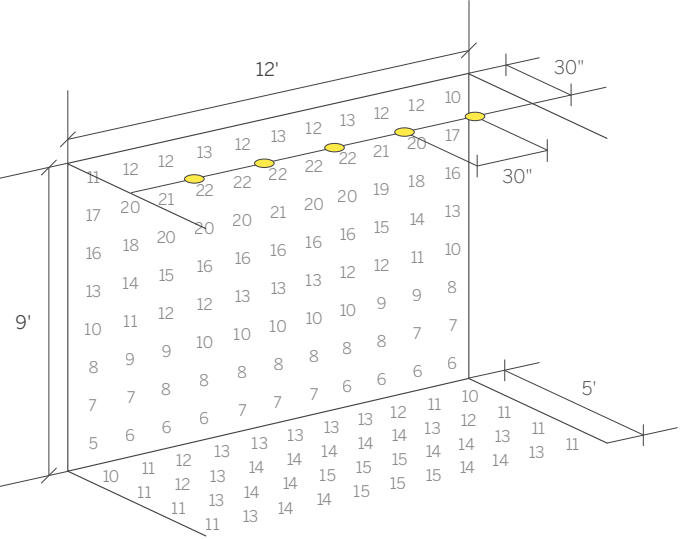

12' Ceiling, Optimal 30" Offset,
30" Luminaire Spacing

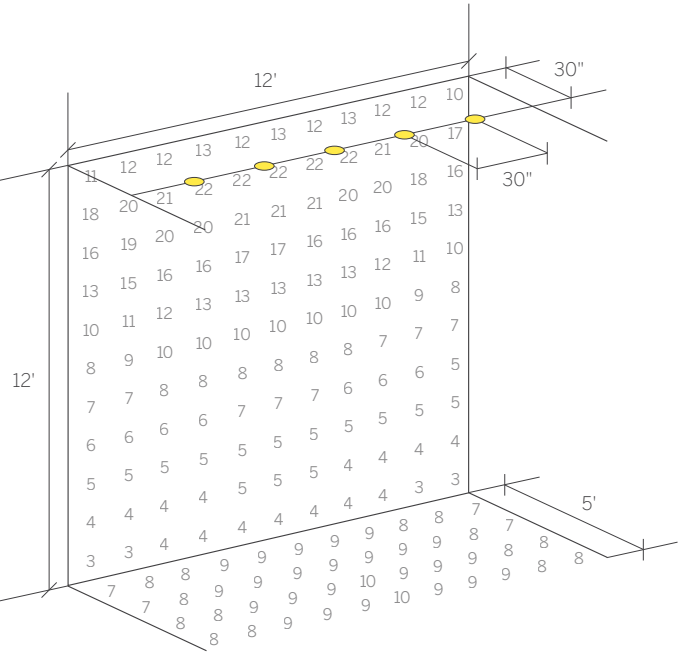

Values in Foot Candles

This page shows what we feel are the optimal offsets and luminaire spacings to achieve even illumination.

Calculated on the following basis:

Reflectances	Maintenance Factor	LED	Diffuser
Ceiling 70%	1.0	965lm*	Flush Frosted
Walls 50%		3500	
Floor 20%		Kelvin	

Photo Credits

page inside cover-1, 12, inside back cover
project Robert L. Bogomolny Library
location Baltimore, MD
architect Behnisch Architekten
lighting design MCLA
photography David Mattiessen Photography

page 2-3
project Lake Anna Residence
location Lake Anna, VA
architect Perkins+Will
lighting design Jeff Davenport
photography Dan Cunningham

page 8-9
project BMW Paris George V
location Paris, France
architect Carbondale
lighting design Mindseye
photography Roland Halbe

page 15, 20-21, 26-27, 30-31, 143, 153
project Rockville Town Center
location Rockville, MD
architect R2L:Architects, PLLC
photography Steve Lerum, Inter-lux

page 18
project NCARB
location Washington, DC
architect OTJ Architects
photography Trent Bell

page 110-111
project St Edwards School
location St Edwards Pavillion
architect John Pawson

page 112-113
project Senova Dental Practice
location London, UK
architect FLACQ Architects
photography Andy Spain

page 140-141
project Maidstone Museum
location London, UK
architect Hugh Broughton Architects
Lighting Designer AECOM

page 145
project Redevco
location London, UK
architect ORMS



The application of light to the surfaces around us is a critical factor in our perception of any space.

When proper consideration is given to the architecture, function and the desired atmosphere, lighting can become a truly integrated part of the overall environment being created, often unseen although defining and enhancing the space.