



ProTools 60 Linear Wall Graze
Recessed

- 2.4” aperture, integrated solution that is compatible with all ceiling types
- Standard and tailored run lengths, including corners
- Graze to 30’ wall height
- *Soft Graze* to vary light center from the wall
- Extreme brightness control and the elimination of disturbing glare
- Consistent LED technology throughout the Whitegoods product range
- Easy to install housing allows the wall to continue above the finished ceiling
- Flexible design allows exact wall-to-wall dimensions
- Flicker-free full range dimming with standard driver (Eldoled)
- Manufactured in the USA

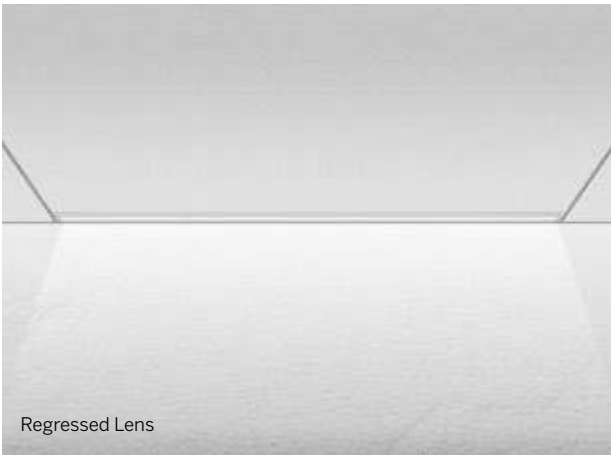


Housing	Precision extruded aluminum for true dimensions and tolerances Toolless component assembly from below Perfect fit with inserts, louvers and lenses Standard and tailored lengths including corner configurations <i>Soft Graze</i> adds 1” - 3” additional set-off for less dramatic graze Recessed snap-in cover for non-illuminated section Finishes: white, black, silver and custom
Integration	Fixation into gypsum, hard ceilings and all grid ceiling types Finished wall continues past the ceiling line
Distribution	Wall Graze and <i>Soft Graze</i>
LED	>90 CRI, 3-Step MacAdam; 2700K-4000K static white, constant current 3W - 15W per foot, 180 nominal lumens per watt average RA 91-94 (2700-4000K) L70 (TM21 Projected 85C) Static White = 72,000 hours
Optic	RLW/RLB - recessed louver white (W) or black (B) extreme cutoff REO - Recessed elliptical optic - high efficiency graze
Reflector	White: high efficiency (standard with RLW) Black: no brightness (standard with RLB) Silver: low brightness All 15% gloss Custom finish available
Driver	Compatible with quality constant current drivers
Connectivity	POE Wireless
Weight	4lbs per foot
Operating Temp	Suitable for operation in maximum ambient temperature of 35C (95F)
Warranty	5-year Limited (see complete company warranty information)
Certifications	ETL and ETL-C for dry and damp location
Voltages	120-277VAC

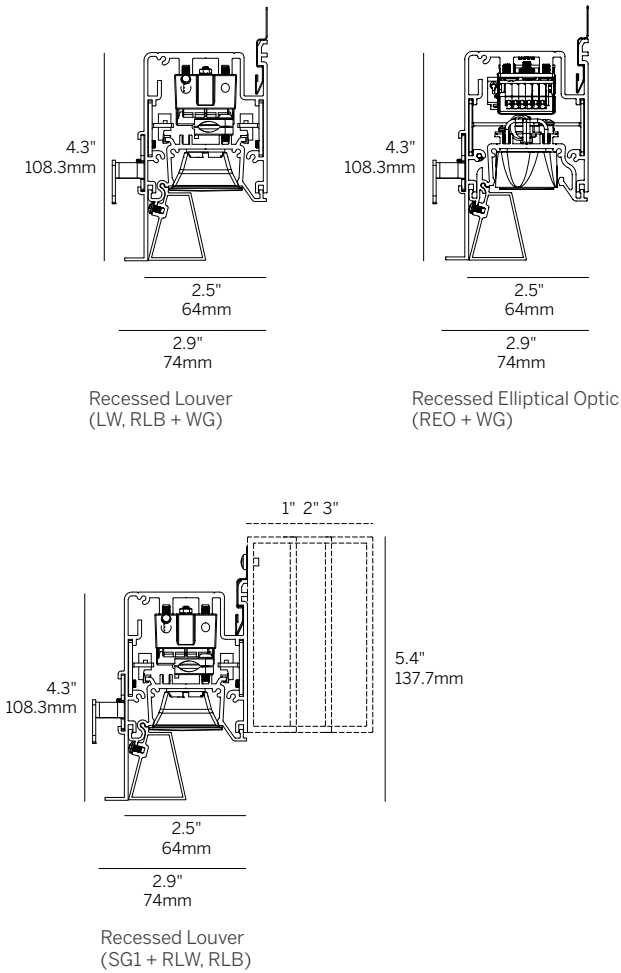

ProTools 60 Linear Wall Graze
Recessed

Model	Fixation	Pattern	Length ²	CRI/CCT	Optic ³	Beam	Power ⁴	Driver ⁵	Housing Finish ⁶	Options
WG-60PTLWG WG-60PTLSG1 WG-60PTLSG2 WG-60PTLSG3	RPT RBT RGT9 RGT15 RGTS	S PI ¹ PO ¹	24 48 96 XX ³	927 930 935 940	RLW RLB REO	WG	P1 P2 P3 P4	E1 L1 POE BT DALI	W B S F	CP EM NYC TF

- Model**
- WG-60PTLWG = ProTools 60 Linear Wall Graze
 - WG-60PTLSG1 = ProTools 60 Linear *Soft Graze* 1” extension
 - WG-60PTLSG2 = ProTools 60 Linear *Soft Graze* 2” extension
 - WG-60PTLSG3 = ProTools 60 Linear *Soft Graze* 3” extension
- Fixation**
- RPT = Recessed plaster trim
 - RBT = Recessed trim for hard ceiling
 - RGT9 = Recessed trim for 9/16” grid
 - RGT15 = Recessed trim for 15/16” grid
 - RGTS = Recessed trim for slot grid
- Pattern**
- S = Straight run
 - PI = Standard patterns 2, 3 or 4 sided with 90° inside corners on the same plane¹
 - PO = Standard patterns 2, 3 or 4 sided with 90° outside corners on the same plane¹
- Length²**
- 24 = 24”
 - 48 = 48”
 - 96 = 96”
 - XX = Specify inches to the nearest 0.25”³
- CRI/CCT (90+ CRI)**
- 927 = 2700K
 - 930 = 3000K
 - 935 = 3500K
 - 940 = 4000K
- Optic³**
- RLW = Recessed louver white (supplied with white reflectors standard)
 - RLB = Recessed louver black (supplied with black reflectors only)
 - REO = Recessed elliptical optic
- Beam**
- WG = Wall Graze
- Power⁴**
- P1 = 3W/ft
 - P2 = 6W/ft
 - P3 = 10W/ft
 - P4 = 15W/ft
- Driver⁵**
- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
 - L1 = Lutron 1% dimming, Ecosystem (120-277V)
 - PoE = Power over Ethernet
 - BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
 - DALI = EldoLED Dali DT8 0.1% (120-277V)
- Housing / Trim Finish (Includes kick reflector)⁶**
- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
 - B = Black, 15% gloss, Tiger Drylac 44/90053
 - S = Silver, 15% gloss, Tiger Drylac 49/90500
 - F = Custom finished trim, specify RAL
- Options**
- CP = Chicago Plenum Rated
 - EM = Emergency (remote)
 - NYC = 6’ whip per run
 - TF = Top feed

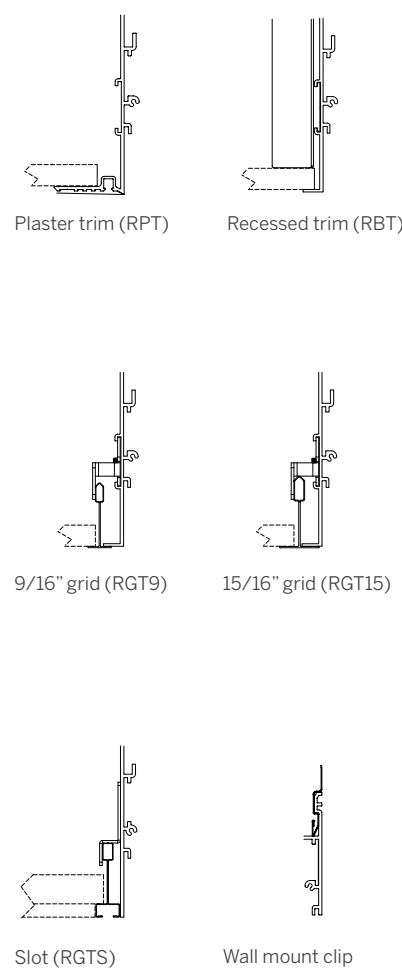

Whitegoods reserves the right to change any information without prior notice.

- Notes**
- 1 See pattern spec sheet.
 - 2 Individual fixture lengths less than 2’ may require remote driver.
 - 3 Specify Lensed products to nearest 0.25”. Specify Louvered and Tuneable White products in 12” increments for continuous light. Louver supplied in 12” increments, balance of the run will have recessed blank covers on ends.
 - 4 Refer to specsheet for delivered lumen data for all product configurations.
 - 5 See power supply page for details.
 - 6 See Tiger Drylac color chart: inter-lux.com/tiger

