



4" Square Ceiling / Floor Wash

DELIVERED LUMENS PER FOOT WG-100SCFW-...-H-...-W					
		Power			
		L [8.1 W]	M [11.5 W]	H [16.8 W]	
CCT	927	544	620	896	
	930	585	667	963	
	935	626	713	1030	
	940	626	713	1030	
Power Multiplier					
		L [8.1 W]	M [11.5 W]	H [16.8 W]	
		0.61	0.69	1.00	
CCT Multiplier					
		927	930	935	940
		0.87	0.93	1.00	1.00
UGR**					
		L [8.1 W]	M [11.5 W]	H [16.8 W]	
		40.0	40.4	41.7	



ILLUMINANCE - HIGH POWER 3500K WG-100SCFW-...-H-935-...-W*	
Offset Distance [ft]	Illuminance [fc at max cd]
2	163
4	41
6	18
8	10
10	7
12	5
14	3
16	3
18	2
20	2

Fixture mounted 2'-0" above finished floor / below ceiling plane.
Illuminance points spaced 1'-0" on center.

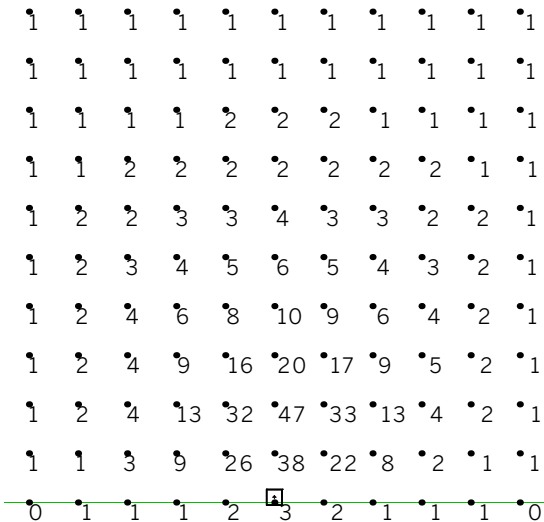

*Polar Plot and Cone of Light are applicable to part number noted; use Multiplication Factor table to approximate other models or refer to online photometry.
**UGR value noted is the maximum UGR (crosswise) with 935 LEDs at noted Power level.