

ORMA



 **linea**
light
i-LÈD

K15

inter-lux.com

MAESTRO 2.2

orma

Materials

Aluminium body


Extra-clear tempered glass diffuser



orma range



	OR-TL-F	OR-TL-A	OR-TL-FR	OR-TL-CO	OR-FT-F	OR-FT-A	OR-FT-WW
							
	Orma Trimless Flush Fixed	Orma Trimless Flush Adjustable	Orma Trimless Flush Frosted	Orma Trimless Flush Concentric	Orma Flush Trim Fixed	Orma Flush Trim Adjustable	Orma Flush Trim Wall Washer
Ø0.9"	1W CC 1.5W CV	-	1W CC 1.5W CV	-	-	-	-
Ø1.7"	-	-	-	1.5W CV	-	-	-
Ø2.1" - Ø2.2"	4W CC 5W CV	4W CC 5W CV	1W CC 1.5W CV	1W CC 1.5W CV	4W CC 5W CV	4W CC 5W CV	4W CC 5W CV
Ø2.5"	-	-	-	-	-	-	-
Ø3.3" - Ø3.4"	8W CC 9W CV	8W CC 9W CV	2W CC 2.5W CV	2W CC 2.5W CV	8W CC - 9W CV 8W RGBW	8W CC 9W CV	8W CC 9W CV
Ø3.8"	-	-	-	-	-	-	-
Ø4.9" - Ø5"	12W CC	12W CC	4W CC 5W CV	4W CC 5W CV	12W CC	12W CC	12W CC
Ø5.4"	-	-	-	-	-	-	-
Accessories	 		-	-	 		-
Finish				  			
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW	2700K 3000K 4000K	2700K 3000K 4000K
Optic	Spot Flood Wide Flood	Spot Flood Wide Flood	General	General	Spot Flood Wide Flood Elliptical	Spot Flood Wide Flood	Asymmetric

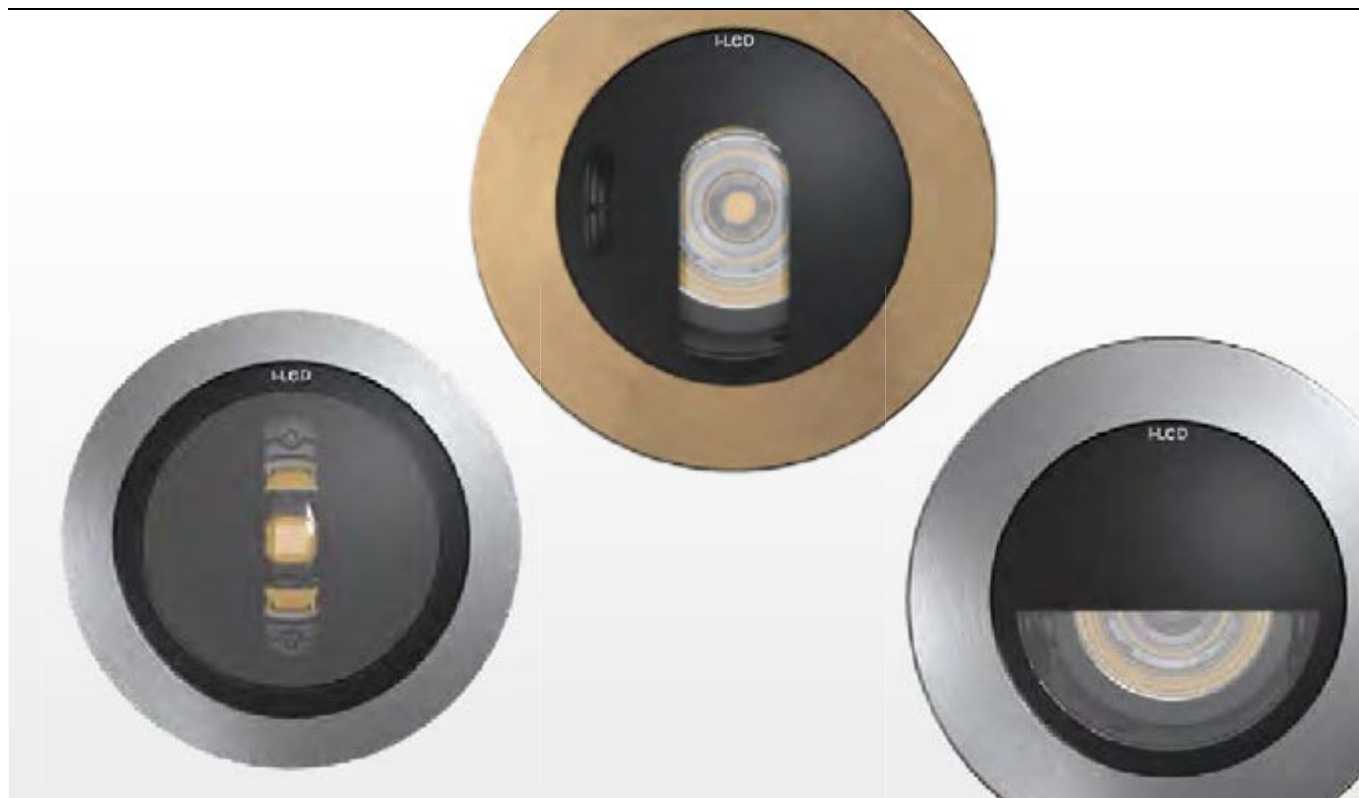

	OR-SFST/BT-BL	OR-FT-FR	OR-SFST/BT-F	OR-SFST/BT-A	OR-SFST/BT-WW	OR-FT-BL	OR-SFST/BT-FR
							
	Orma Semi-Flush Trim Blade	Orma Flush Trim Frosted	Orma Semi-Flush Trim Fixed	Orma Semi- Flush Trim Adjustable	Orma Semi-Flush Trim Wall Washer	Orma Flush Trim Blade	Orma Semi-Flush Trim Frosted
Ø0.9"	-	-	-	-	-	-	-
Ø1.7"	-	-	-	-	-	-	-
Ø2.1" - Ø2.2"	-	1W CC 1.5W CV	-	-	-	-	-
Ø2.5"	-	-	4W CC 5W CV	4W CC 5W CV	4W CC 5W CV	-	1W CC 1.5W CV
Ø3.3" - Ø3.4"	-	2W CC 2.5W CV	-	-	-	8W CC 9W CV	-
Ø3.8"	8W CC 9W CV	-	8W CC - 9W CV 8W RGBW	8W CC 9W CV	8W CC 9W CV	-	2W CC 2.5W CV
Ø4.9" - Ø5"	-	4W CC 4.5W CV	-	-	-	-	-
Ø5.4"	-	-	12W CC	12W CC	12W CC	-	4W CC 5W CV
Accessories	-	-	HC DL	HC	-	-	-
Finish	Steel Alu Brass Alu	Steel Alu	Steel Alu Brass Alu	Steel Alu Brass Alu	Steel Alu Brass Alu	Steel Alu	Steel Alu Brass Alu
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
Optic	Extra Wide Flood	General	Spot Flood Wide Flood Elliptical	Spot Flood Wide Flood	Asymmetric	Extra Wide Flood	General

Broad Range

Orma is a complete recess-mounted family with compact sizes, and sturdy, reliable materials with high grades of protection: temporary IK10 and IP68¹, ideal for tight installation spaces.

In addition to the embossed steel flange, the range is enriched by the new Brass finish. The recess-mounted steel flange is completed by the brand new version with an all-glass front flush with the floor and a path-marker with concentric optics.


The adjustable version can be easily and quickly aimed through the screw system on the side of the fixture body, without have to open and remove the top trim/glass.

This breakthrough concept entirely remove the risk of water infiltration during the on site aiming process.

Orma was conceived with a unique application versatility which provides the designer with a vast range of possible beams, finish and optics combinations. Flush, all-glass or in metal, Orma can adapt to any setting, even the most unusual one, thanks to the possibility of choosing from no less than eight diameters and square-shaped flange. On a technical lighting level, new optics packages are introduced: Spot, Flood, Wide Flood, Extra Wide Flood, General, Elliptical, asymmetrical swing with Wall Washer optics.

1 Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min. NOT suitable for submersible installations.





2 Fixtures have an overall depth of 3" including casing. 1" variants are deeper than 3".



Blade Optics

The Blade optics let you light windows, arches and architraves, emphasising the architecture and its details. The entirely recess-mounted structure lets the window or door open and close without interference.

The light beam is very narrow laterally and then opens up to almost 180° at the front, enhancing the inner face of the openings without glare or light pollution.

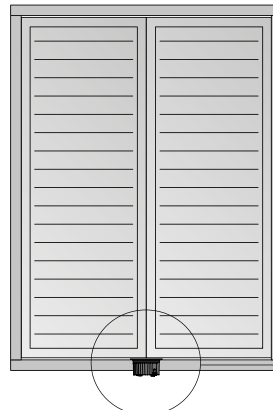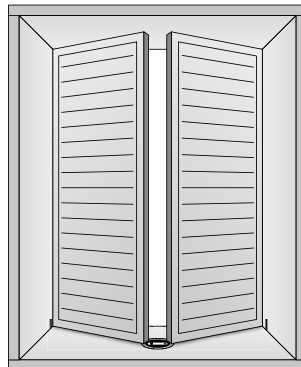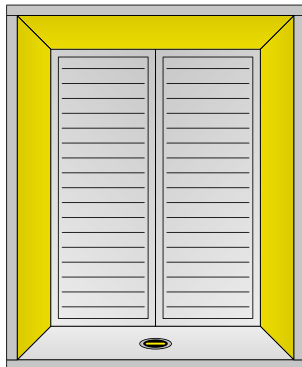


Concentric Optics

An exclusive design, recess-mounted path marker, flush with the pavement, it is capable of creating beautiful effects and giving the paths correct directionality with a sturdy structure capable of withstanding traffic weighing up to 4400 lb. The family includes four diameters: 1.7 in, 2.2 in, 3.4 in, 5 in and 5 power versions: 1 W, 1.5 W, 2 W, 2.5 W, 4 W, 5 W. A diverse and vast range available to professionals and their creativity.




Wall Washer Optics


Optics conceived for wall and floor recessed installation, they allow the creation of perfectly marked and visible luminous paths. The particular Washer optics allow the luminous cone to be sectioned in favour of high visual comfort and to be easily directed so that the positioning is not restricted in the installation phase.

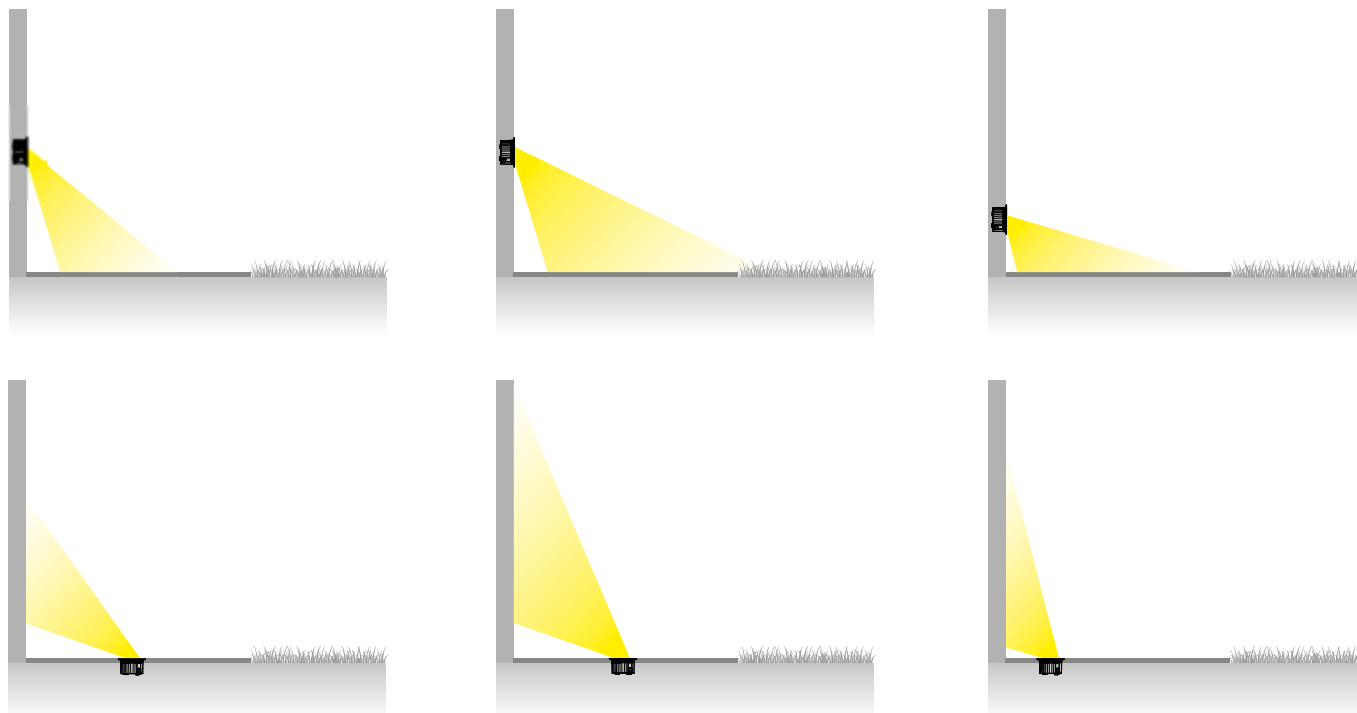

Thanks to the tilting system built into the optics compartment, Orma Wall Washer is able to adapt to different installation heights, defining the diffusion of the light up the 9.8 feet away from the source.

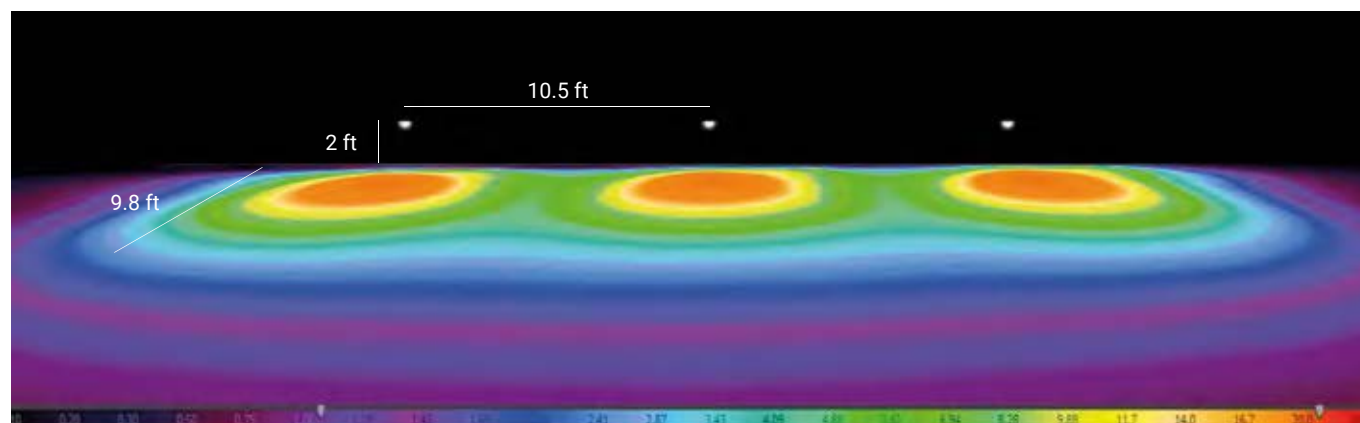


Orma Trimless Flush | Fixed | 0.9" Ø (CC)



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82697	M 2700	136 - 71	20 Spot -
	W 3000	145 - 76	35 Flood -
	N 4000	155 - 81	

Power supply options (remote only)



E83036
Concrete
casing
PVC



E99925
Tile
casing
PVC



Orma Trimless Flush | Fixed | 0.9" Ø (CV)



C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82698	M 2700	136 - 71	20 Spot -
	W 3000	145 - 76	35 Flood -
	N 4000	155 - 81	

Power supply options (remote only)


OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-dim 24VDC, 120-277VAC, Wet location



E83037
Concrete
casing
PVC



E99925
Tile
casing
PVC



Orma Trimless Flush | Fixed | 2.2" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82657	M 2700	490 - 288	15 Spot -
Glass Alu E82658 HC	W 3000	490 - 288	25 Elliptical* -
Glass Alu E82659 DL	N 4000	529 - 311	30 Flood -
			60 W.Flood -

*Elliptical available with E82657 only.

Power supply options (remote only)

EC030W-350

0-10V EldoLED
ECOdrive 30W
for 1-3 fixtu es

SOL050W-350

0-10V EldoLED
SOLdrive 50W
for 1-6 fixtu es

SOL0100W-350

0-10V EldoLED
SOLdrive 100W
for 1-12 fixtu es

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82660	M 2700	490 - 288	15 Spot -
Glass Alu E82661 HC	W 3000	490 - 288	25 Elliptical* -
Glass Alu E82662 DL	N 4000	529 - 311	30 Flood -
			60 W.Flood -

*Elliptical available with E82660 only.

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83038
Concrete
casing
PVC



E99922
Tile
casing
PVC



technical
information



K21

inter-lux.com

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

MAESTRO 2.2

Orma Trimless Flush | Fixed | 3.4" Ø



C.C. 8W DC - 220mA	Cct	Im S - D	Optic
Glass Alu E82669	M 2700	1080 - 689	15 Spot -
Glass Alu E82670 HC	W 3000	1126 - 718	30 Flood -
Glass Alu E82671 DL	N 4000	1188 - 758	60 W.Flood -



Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECODrive 30W for 1 fixtu e	0-10V EldoLED SOLOdrive 50W for 1-2 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-4 fixtu es



C.V. 9W DC - 24 VDC	Cct	Im S - D	Optic
Glass Alu E82672	M 2700	1193 - 689	15 Spot -
Glass Alu E82673 HC	W 3000	1244 - 718	30 Flood -
Glass Alu E82674 DL	N 4000	1313 - 758	60 W.Flood -

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location





Orma Trimless Flush | Fixed | 5.0" Ø



C.C. 12W - 350mA	Cct	Im S - D	Optic
Glass Alu E82683	M 2700	1724 - 1365	15 Spot -
Glass Alu E82684 HC	W 3000	1724 - 1365	30 Flood -
Glass Alu E82685 DL	N 4000	1854 - 1466	60 W.Flood -

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-220
0-10V EldoLED ECODrive 30W for 1 fixtu e	0-10V EldoLED SOLOdrive 50W for 1-2 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-4 fixtu es



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.


Uplights and in-ground lamps

inter-lux.com

technical
information

K22

Orma Trimless Flush | Adjustable | 2.2" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Glass / Alu E82663	M 2700	490 - 288	15 Spot -
	W 3000	490 - 288	30 Flood -
	N 4000	529 - 311	60 W.Flood -

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtu es	0-10V EldoLED SOLOdrive 50W for 1-6 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-12 fixtu es

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Glass / Alu E82664	M 2700	490 - 288	15 Spot -
	W 3000	490 - 288	30 Flood -
	N 4000	529 - 311	60 W.Flood -

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location


E83038
Concrete
casing
PVC



E99922
Tile
casing
PVC



Orma Trimless Flush | Adjustable | 3.4" Ø



C.C. 8W DC - 220mA	Cct	lm S - D	Optic
Glass / Alu E82675	M 2700	1080 - 693	15 Spot -
Glass / Alu E82676 HC	W 3000	1126 - 722	30 Flood -
	N 4000	1188 - 763	60 W.Flood -

Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixtu e	0-10V EldoLED SOLOdrive 50W for 1-2 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-4 fixtu es

C.V. 9W DC - 24 VDC	Cct	lm S - D	Optic
Glass / Alu E82677	M 2700	1193 - 693	15 Spot -
Glass / Alu E82678 HC	W 3000	1244 - 722	30 Flood -
	N 4000	1313 - 763	60 W.Flood -


Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83039
Concrete
casing
PVC





E99923
Tile
casing
PVC



technical
information

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.



Orma Trimless Flush | Adjustable | 5.0" Ø



C.C. 12W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82689	M 2700	1724 - 1203	15 Spot -
Glass Alu E82690 HC	W 3000	1724 - 1203	30 Flood -
	N 4000	1854 - 1292	60 W.Flood -


Power supply options (remote only)

EC030W-350 0-10V EldoLED EC0drive 30W for 1 fixture	SOL050W-350 0-10V EldoLED SOL0drive 50W for 1-2 fixtures	SOL0100W-350 0-10V EldoLED SOL0drive 100W for 1-4 fixtures
---	--	--



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.



Orma Trimless Flush | Frosted | 0.9" Ø (CC)




C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82699	M 2700	136 - 12	00 General -
	W 3000	145 - 13	
	N 4000	155 - 14	

Power supply options (remote only)

EC030W-350 0-10V EidoLED ECOdrive 30W for 1-10 fixtu es	SOL050W-350 0-10V EidoLED SOLOdrive 50W for 1-20 fixtu es	SOLO100W-350 0-10V EidoLED SOLOdrive 100W for 1-40 fixtu es
---	---	---





Orma Trimless Flush | Frosted | 0.9" Ø (CV)




C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82700	M 2700	136 - 12	00 General -
	W 3000	145 - 13	
	N 4000	155 - 14	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Trimless Flush | Frosted | 2.2" Ø



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82667	M 2700	136 - 8	00 General -
	W 3000	145 - 8	
	N 4000	155 - 9	



Power supply options (remote only)

EC030W-350 0-10V EidoLED ECOdrive 30W for 1-10 fixtu es	SOL050W-350 0-10V EidoLED SOLOdrive 50W for 1-20 fixtu es	SOLO100W-350 0-10V EidoLED SOLOdrive 100W for 1-40 fixtu es
---	---	---

C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82668	M 2700	136 - 8	00 General -
	W 3000	145 - 8	
	N 4000	155 - 9	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



technical
information


K25

inter-lux.com

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

MAESTRO 2.2

Orma Trimless Flush | Frosted | 3.4" Ø



C.C. 2W DC- 630mA	Cct	lm S - D	Optic
Glass Alu E82681	M 2700	249 - 15	00 General -
	W 3000	266 - 15	
	N 4000	284 - 16	

Power supply options (remote only)

EC030W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECODrive 30W for 1-10 fixtu es	0-10V EldoLED SOLOdrive 50W for 1-16 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-32 fixtu es

C.V. 2.5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82682	M 2700	249 - 15	00 General -
	W 3000	266 - 15	
	N 4000	284 - 16	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83039

Concrete casing

PVC




E99923

Tile casing

PVC



Orma Trimless Flush | Frosted | 5.0" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82695	M 2700	490 - 50	00 General -
	W 3000	490 - 50	
	N 4000	529 - 54	

Power supply options (remote only)

EC030W-350	SOLO50W-350	SOLO100W-220
0-10V EldoLED ECODrive 30W for 1-3 fixtu es	0-10V EldoLED SOLOdrive 50W for 1-6 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-12 fixtu es

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82696	M 2700	490 - 50	00 General -
	W 3000	490 - 50	
	N 4000	529 - 54	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83040

Concrete casing

PVC



E99924

Tile casing

PVC



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.


Uplights and in-ground lamps

technical
information

inter-lux.com

K26

Orma Trim Semi-Flush Trim | Concentric | 1.6" Ø



C.V. 1.5W DC - 24VDC		Cct	lm S - D	Optic
White	E95474	M 2700	136 - 54	00 General
Black	E95475	W 3000	145 - 60	
Grey	E95476	N 4000	155 - 63	

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-dim 24VDC, 120-277VAC, Wet location

E98291

Concrete casing

3.9/5.4



4.1

E98292

Tile casing
PVC

3.1



Ø1.7

Orma Trim Semi-Flush Trim | Concentric | 2.2" Ø



C.C. 1W DC - 350mA		Cct	lm S - D	Optic
Black	E82665	M 2700	136 - 6	00 General -
		W 3000	145 - 6	
		N 4000	155 - 7	

Power supply options (remote only)

EC030W-350

0-10V EldoLED
EC0drive 30W
for 1-10 fixtu es

SOLO50W-350

0-10V EldoLED
SOLOdrive 50W
for 1-20 fixtu es

SOLO100W-350

0-10V EldoLED
SOLOdrive 100W
for 1-40 fixtu es

C.V. 1.5W DC - 24VDC		Cct	lm S - D	Optic
Black	E82666	M 2700	136 - 6	00 General -
		W 3000	145 - 6	
		N 4000	155 - 7	

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX

Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83038

Concrete casing
PVC




Ø2.2

3

Ø3.8

E99922

Tile casing
PVC




3

Ø2.2

technical
information



Orma Trimless Flush | Concentric | 3.4" Ø



C.C. 2W DC - 630mA	Cct	lm S - D	Optic
Black E82679	M 2700	249 - 13	00 General -
	W 3000	266 - 13	
	N 4000	284 - 14	

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EidoLED ECOdrive 30W for 1-10 fixtu es	0-10V EidoLED SOLOdrive 50W for 1-16 fixtu es	0-10V EidoLED SOLOdrive 100W for 1-32 fixtu es

C.V. 2.5W DC - 24 VDC	Cct	lm S - D	Optic
Black E82680	M 2700	249 - 13	00 General -
	W 3000	266 - 13	
	N 4000	284 - 14	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location


E83039
Concrete
casing
PVC



E99923
Tile
casing
PVC



Orma Trimless Flush | Concentric | 5.0" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Black E82693	M 2700	490 - 34	00 General -
	W 3000	490 - 34	
	N 4000	529 - 37	

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-220
0-10V EidoLED ECOdrive 30W for 1-3 fixtu es	0-10V EidoLED SOLOdrive 50W for 1-6 fixtu es	0-10V EidoLED SOLOdrive 100W for 1-12 fixtu es

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Black E82694	M 2700	490 - 34	00 General -
	W 3000	490 - 34	
	N 4000	529 - 37	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83040
Concrete
casing
PVC





E99924
Tile
casing
PVC



technical
information



Orma Flush Trim | Fixed | 2.1" Ø



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu E81181	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

HC	Cct	Im S - D	Optic
Steel/Alu E81182	M 2700	490 - 187	15 Spot (20°)
	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)

DL	Cct	Im S - D	Optic
Steel/Alu E81183	M 2700	490 - 194	15 Spot (22°)
	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtu es	0-10V EldoLED SOLOdrive 50W for 1-6 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-12 fixtu es

C.V. 5W DC - 24 VDC	Cct	Im S - D	Optic
Steel/Alu E81184	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

HC	Cct	Im S - D	Optic
Steel/Alu E81185	M 2700	490 - 187	15 Spot (20°)
	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)

DL	Cct	Im S - D	Optic
Steel/Alu E81186	M 2700	490 - 194	15 Spot (22°)
	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location


E99650

Concrete casing
PVC



E99855*

Square Vandal
Resistant casing 3.1
PVC



E99560*

Round Vandal
Resistant Casing 3.1
PVC



E83251

Tile casing
PVC





RTG E81181W15 / E81181W30

K31

inter-lux.com

Orma Flush Trim | Fixed | 3.3" Ø



C.C. - 8W DC - 220 mA	Cct	Im S - D	Optic
Steel/Alu E81187	M 2700	1080 - 858	15 Spot (15°)
	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	Im S - D	Optic
Steel/Alu E81188	M 2700	1080 - 619	15 Spot (15°)
	W 3000	1126 - 646	30 Flood (27°)
	N 4000	1188 - 681	60 W.Flood (49°)

DL	Cct	Im S - D	Optic
Steel/Alu E81189	M 2700	1080 - 576	15 Spot (16°)
	W 3000	1126 - 600	30 Flood (29°)
	N 4000	1188 - 634	60 W.Flood (53°)

Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixtu e	0-10V EldoLED SOLOdrive 50W for 1-2 fixtu es	0-10V EldoLED SOLOdrive 100W for 1-4 fixtu es

C.V. 9W DC - 24 VDC	Cct	Im S - D	Optic
Steel/Alu E81190	M 2700	1193 - 955	15 Spot (15°)
	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	Im S - D	Optic
Steel/Alu E81191	M 2700	1193 - 687	15 Spot (15°)
	W 3000	1244 - 716	30 Flood (27°)
	N 4000	1313 - 756	60 W.Flood (49°)

DL	Cct	Im S - D	Optic
Steel/Alu E81192	M 2700	1193 - 639	15 Spot (16°)
	W 3000	1244 - 667	30 Flood (29°)
	N 4000	1313 - 704	60 W.Flood (53°)

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).



Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min. NOT suitable for submersible installations.

Inter-lux reserves the right to make technical changes without notice.

technical
information

MAESTRO 2.2

Orma Flush Trim | Fixed | 3.3" Ø (RGBW)



RGBW* - 8W DC - 630 mA	Cct	Optic
Steel/Alu E81322	Q RGBW natural white	06 N.Spot -
	V RGBW warm white	15 Spot -
		45 W.Flood -
		00 General -

, Quad-chip LED

Power supply options (remote only)

PWR50W-630
DMX EldoLED
POWERdrive 50W
for 1-5 fixtures

E99651
Concrete
casing
PVC




E99563*
Round Vandal
Resistant casing
PVC



E99856*
Square Vandal
Resistant casing
PVC



E83252
Tile
casing
PVC



Feed Cables**

E99216 59 in. DC(+) power cable F 4 pin M12	E89190 196 in. DC(+) power cable F 4 pin M12	E98476 59 in. DC(-) power cable M 4 pin M12	E98477 196 in. DC(-) power cable M 4 pin M12
--	---	--	---

** One Female DC(+) and one Male DC(-) required per driver



Extension Cables***

E98437 39 in. Extension power cable M+F 4 pin M12	E98149 196.85 in Extension for power cable M+F 4 pin M12	E89188 393.7 in Extension for power cable M+F 4 pin M12
--	---	--

***Required between fixtures powered from the same driver

RTG E81187W30

Orma Flush Trim | Fixed | 4.9" Ø



C.C. 12W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu E81193	M 2700	1724 - 1379	15 Spot (14°)
	W 3000	1724 - 1379	30 Flood (31°)
	N 4000	1854 - 1485	60 W.Flood (60°)

HC	Cct	Im S - D	Optic
Steel/Alu E81194	M 2700	1724 - 981	15 Spot (14°)
	W 3000	1724 - 981	30 Flood (28°)
	N 4000	1854 - 1055	60 W.Flood (49°)

DL	Cct	Im S - D	Optic
Steel/Alu E81195	M 2700	1724 - 1094	15 Spot (14°)
	W 3000	1724 - 1094	30 Flood (30°)
	N 4000	1854 - 1178	60 W.Flood (52°)

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
--	---	---


E99652
Concrete
casing
PVC




E99564*
Round Vandal
Resistant Casing
PVC



E99857*
Square Vandal
Resistant Casing
PVC



E83253
Tile
casing
PVC



NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.


Uplights and in-ground lamps

technical
information

inter-lux.com

K32

Orma Flush Trim | Adjustable | 2.1" Ø



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu E81205	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)

Power supply options (remote only)

EC030W-350 0-10V EldoLED EC0drive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---

C.V. 5W DC - 24 VDC	Cct	Im S - D	Optic
Steel/Alu E81206	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

E99650

Concrete
casing
PVC




E99560*

Round Vandal
Resistant Casing
PVC



E99855*

Square Vandal
Resistant Casing
PVC




E83251

Tile
Casing
PVC



Orma Flush Trim | Adjustable | 3.3" Ø



C.C. - 8W DC - 220 mA	Cct	Im S - D	Optic
Steel/Alu E81207	M 2700	1080 - 858	15 Spot (15°)
	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	Im S - D	Optic
Steel/Alu E82460	M 2700	1080 - 619	15 Spot -
	W 3000	1126 - 646	30 Flood -
	N 4000	1188 - 681	60 W.Flood -

Power supply options (remote only)

EC030W-220 0-10V EldoLED EC0drive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

C.V. 9W DC - 24 VDC	Cct	Im S - D	Optic
Steel/Alu E81208	M 2700	1193 - 955	15 Spot (15°)
	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	Im S - D	Optic
Steel/Alu E82461	M 2700	1193 - 687	15 Spot -
	W 3000	1244 - 716	30 Flood -
	N 4000	1313 - 761	60 W.Flood -

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure
--

OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--

E99651

Concrete
casing
PVC




E99563*

Round Vandal
Resistant Casing
PVC




E99856*

Square Vandal
Resistant Casing
PVC



E83252


Tile
Casing
PVC



technical
information

NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without
glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Flush Trim | Adjustable | 4.9" Ø



C.C. - 12W DC - 350 mA	Cct	lm S - D	Optic
Steel/Alu E81209	M 2700	1724 - 1317	15 Spot (22°)
	W 3000	1724 - 1317	30 Flood (34°)
	N 4000	1854 - 1417	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E82462	M 2700	1724 - 935	15 Spot -
	W 3000	1724 - 935	30 Flood -
	N 4000	1854 - 1005	60 W.Flood -

Power supply options (remote only)

EC030W-350 0-10V EldoLED EC0drive 30W for 1 fixture	SOL050W-350 0-10V EldoLED SOL0drive 50W for 1-2 fixtures	SOL0100W-350 0-10V EldoLED SOL0drive 100W for 1-4 fixtures
---	--	--

E99652

Concrete casing


PVC



E99564*

Round Vandal Resistant Casing


PVC



E99857*

Square Vandal Resistant Casing

PVC



E83253

Tile Casing

PVC



NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.


Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).

Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min. NOT suitable for submersible installations.

Inter-lux reserves the right to make technical changes without notice.

technical
information

Orma Flush Trim | Frosted | 2.1" Ø



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81217	M 2700	136 - 17	00 General (117°)
	W 3000	145 - 18	
	N 4000	155 - 19	

Power supply options (remote only)

EC030W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECODrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	0-10V EldoLED SOLOdrive 100W for 1-40 fixtures

C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81218	M 2700	136 - 17	00 General (117°)
	W 3000	145 - 18	
	N 4000	155 - 19	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location


E99650
Concrete
casing
PVC



E99560*
Round Vandal
Resistant Casing
PVC




E99855*
Square Vandal
Resistant Casing
PVC



E83251
Tile
Casing
PVC



Orma Flush Trim | Frosted | 3.3" Ø



C.C. 2W DC - 630 mA	Cct	lm S - D	Optic
Steel/Alu E81219	M 2700	249 - 25	00 General (118°)
	W 3000	266 - 26	
	N 4000	284 - 28	

Power supply options (remote only)

EC030W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECODrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures

C.V. 2.5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81220	M 2700	249 - 25	00 General (118°)
	W 3000	266 - 26	
	N 4000	284 - 28	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E99651
Concrete
Casing
PVC




E99563*
Round Vandal
Resistant Casing
PVC



E99856*
Square Vandal
Resistant Casing
PVC




E83252
Tile
Casing
PVC



technical
information

NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without
glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Flush Trim | Frosted | 4.9" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81221	M 2700	490 - 90	00 General (116°)
	W 3000	490 - 90	
	N 4000	529 - 97	

Power supply options (remote only)

EC030W-350	SOL050W-350	SOL0100W-350
0-10V EidoLED ECODrive 30W for 1-3 fixtures	0-10V EidoLED SOLDrive 50W for 1-6 fixtures	0-10V EidoLED SOLDrive 100W for 1-12 fixtures

C.V. 4.5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81222	M 2700	490 - 90	00 General (116°)
	W 3000	490 - 90	
	N 4000	529 - 97	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E99652

Concrete
Casing
PVC




E99564*

Round Vandal
Resistant Casing
PVC



E99857*

Square Vandal
Resistant Casing
PVC




E83253

Tile
Casing
PVC



NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Semi-Flush Trim | Fixed | 2.5" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E80582	M 2700	490 - 272	15 Spot (22°)
Brass/Alu E84289	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

HC	Cct	lm S - D	Optic
Steel/Alu E80583	M 2700	490 - 187	15 Spot (20°)
Brass/Alu E84290	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)

DL	Cct	lm S - D	Optic
Steel/Alu E80584	M 2700	490 - 194	15 Spot (22°)
Brass/Alu E84291	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)

Power supply options (remote only)

EC030W-350 0-10V EldoLED ECODrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---



C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E80585	M 2700	490 - 272	15 Spot (22°)
Brass/Alu E84292	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

HC	Cct	lm S - D	Optic
Steel/Alu E80586	M 2700	490 - 187	15 Spot (20°)
Brass/Alu E84293	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)

DL	Cct	lm S - D	Optic
Steel/Alu E80587	M 2700	490 - 194	15 Spot (22°)
Brass/Alu E84294	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)



Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



technical
information

Orma Semi-Flush Trim | Fixed | 3.8" Ø



C.C. - 8W DC - 220 mA	Cct	lm S - D	Optic
Steel/Alu E80588	M 2700	1080 - 858	15 Spot (15°)
Brass/Alu E84295	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E80589	M 2700	1080 - 619	15 Spot (15°)
Brass/Alu E84296	W 3000	1126 - 646	30 Flood (27°)
	N 4000	1188 - 681	60 W.Flood (49°)

DL	Cct	lm S - D	Optic
Steel/Alu E80590	M 2700	1080 - 576	15 Spot (16°)
Brass/Alu E84297	W 3000	1126 - 600	30 Flood (29°)
	N 4000	1188 - 634	60 W.Flood (53°)

Power supply options (remote only)

EC030W-220 0-10V EldoLED ECODrive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

C.V. 9W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81172	M 2700	1193 - 955	15 Spot (15°)
Brass/Alu E84298	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E81173	M 2700	1193 - 687	15 Spot (15°)
Brass/Alu E84299	W 3000	1244 - 716	30 Flood (27°)
	N 4000	1313 - 756	60 W.Flood (49°)



DL	Cct	lm S - D	Optic
Steel/Alu E81174	M 2700	1193 - 639	15 Spot (16°)
Brass/Alu E84300	W 3000	1244 - 667	30 Flood (29°)
	N 4000	1313 - 704	60 W.Flood (53°)

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Semi-Flush Trim | Fixed | 3.8" Ø (RGBW)



RGBW* - 8W DC - 630 mA	Cct	Optic
Steel/Alu E81321	Q RGBW natural white	06 N.Spot -
Brass/Alu E84301	V RGBW warm white	15 Spot -
		45 W.Flood -
		00 General -

, Quad-chip LED

Power supply options (remote only)

PWR50W-630

DMX EldoLED
POWERdrive 50W
for 1-5 fixtures


E99651

Concrete
casing
PVC



E83252

Tile
casing
PVC



RTG E80588W30 / E81321V45

Feed Cables**

E99216

59 in. DC(+) power cable
F 4 pin M12

E89190

196 in. DC(+) power cable
F 4 pin M12

E98476

59 in. DC(-) power cable
M 4 pin M12

E98477

196 in. DC(-) power cable
M 4 pin M12

** One Female DC(+) and one Male DC(-) required per driver

Extension Cables***

E98437

39 in. Extension power cable
M+F 4 pin M12

E98149



196.85 in. Extension for power cable
M+F 4 pin M12

E89188

393.7 in. Extension for power cable
M+F 4 pin M12

***Required between fixtures powered from the same driver

Orma Semi-Flush Trim | Fixed | 5.4" Ø



C.C. 12W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81175	M 2700	1724 - 1379	15 Spot (14°)
Brass/Alu E84302	W 3000	1724 - 1379	30 Flood (31°)
	N 4000	1854 - 1485	60 W.Flood (60°)

HC	Cct	lm S - D	Optic
Steel/Alu E81176	M 2700	1724 - 981	15 Spot (14°)
Brass/Alu E84303	W 3000	1724 - 981	30 Flood (28°)
	N 4000	1854 - 1055	60 W.Flood (49°)

DL	Cct	lm S - D	Optic
Steel/Alu E81177	M 2700	1724 - 1094	15 Spot (14°)
Brass/Alu E84304	W 3000	1724 - 1094	30 Flood (30°)
	N 4000	1854 - 1178	60 W.Flood (52°)

Power supply options (remote only)

EC030W-350

0-10V EldoLED
EC0drive 30W
for 1 fixture

SOLO50W-350

0-10V EldoLED
SOLOdrive 50W
for 1-2 fixtures

SOLO100W-350

0-10V EldoLED
SOLOdrive 100W
for 1-4 fixtures

E99652

Concrete
casing
PVC



E83253

Tile
casing
PVC



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.



Uplights and in-ground lamps

technical
information

inter-lux.com

K38

Orma Semi-Flush Trim | Adjustable | 2.5" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81199	M 2700	490 - 272	15 Spot (22°)
Brass/Alu E82521	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81200	M 2700	490 - 272	15 Spot (22°)
Brass/Alu E82522	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

E99650

Concrete
casing
PVC




E83251

Tile
casing
PVC



Orma Semi-Flush Trim | Adjustable | 3.8" Ø



C.C. - 8W DC - 220mA	Cct	lm S - D	Optic
Steel/Alu E81201	M 2700	1080 - 858	15 Spot (15°)
Brass/Alu E82523	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E82456	M 2700	1080 - 619	15 Spot -
Brass/Alu E82934	W 3000	1126 - 646	30 Flood -
	N 4000	1188 - 681	60 W.Flood -

Power supply options (remote only)

ECO30W-220 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

C.V. 9W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81202	M 2700	1193 - 955	15 Spot (15°)
Brass/Alu E82524	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E82457	M 2700	1193 - 687	15 Spot -
Brass/Alu E82935	W 3000	1244 - 716	30 Flood -
	N 4000	1313 - 756	60 W.Flood -

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

E99651

Concrete
casing
PVC




E83252

Tile
casing
PVC



technical
information

Orma Semi-Flush Trim | Adjustable | 5.4" Ø





C.C. - 12W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81203	M 2700	1724 - 1317	15 Spot (22°)
Brass/Alu E82525	W 3000	1724 - 1317	30 Flood (34°)
	N 4000	1854 - 1417	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E82458	M 2700	1724 - 935	15 Spot -
Brass/Alu E84308	W 3000	1724 - 935	30 Flood -
	N 4000	1854 - 1005	60 W.Flood -

Power supply options (remote only)

EC030W-350 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.



Uplights and in-ground lamps



Orma Trim Semi-Flush Adjustable Brass

Orma Trim Semi-Flush Adjustable Steel

Orma Semi-Flush Trim | Frosted | 2.5" Ø



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81211	M 2700	136 - 17	00 General (117°)
Brass/Alu E84318	W 3000	145 - 18	
	N 4000	155 - 19	

Power supply options (remote only)

EC030W-350 0-10V EldoLED EC0drive 30W for 1-10 fixtu es	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-20 fixtu es	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-40 fixtu es
---	---	---

C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81212	M 2700	136 - 17	00 General (117°)
Brass/Alu E84319	W 3000	145 - 18	
	N 4000	155 - 19	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

E99650

Concrete
Casing
PVC




E83251

Tile
Casing
PVC



Orma Semi-Flush Trim | Frosted | 3.8" Ø



C.C. 2W DC - 630mA	Cct	lm S - D	Optic
Steel/Alu E81213	M 2700	249 - 25	00 General (118°)
Brass/Alu E84320	W 3000	266 - 26	
	N 4000	284 - 28	

Power supply options (remote only)

EC030W-630 0-10V EldoLED EC0drive 30W for 1-10 fixtu es	SOLO50W-630 0-10V EldoLED SOLOdrive 50W for 1-16 fixtu es	SOLO100W-630 0-10V EldoLED SOLOdrive 100W for 1-32 fixtu es
---	---	---

C.V. 2.5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81214	M 2700	249 - 25	00 General (118°)
Brass/Alu E84321	W 3000	266 - 26	
	N 4000	284 - 28	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

E99651

Concrete
Casing
PVC




E83252

Tile
Casing
PVC



technical
information

Orma Semi-Flush Trim | Frosted | 5.4" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81215	M 2700	490 - 90	00 General (116°)
Brass/Alu E84322	W 3000	490 - 90	
	N 4000	529 - 97	

Power supply options (remote only)

EC030W-350 0-10V EldoLED ECODrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81216	M 2700	490 - 90	00 General (116°)
Brass/Alu E84323	W 3000	490 - 90	
	N 4000	529 - 97	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

E99652

Concrete
Casing
PVC



E83253

Tile
Casing
PVC



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Uplights and in-ground lamps


technical
information

inter-lux.com

K42


INSTALLATION

Installation in a few quick steps (**Recessed casing E99563 + Orma Trim Flush Adjustable E81207W15**)

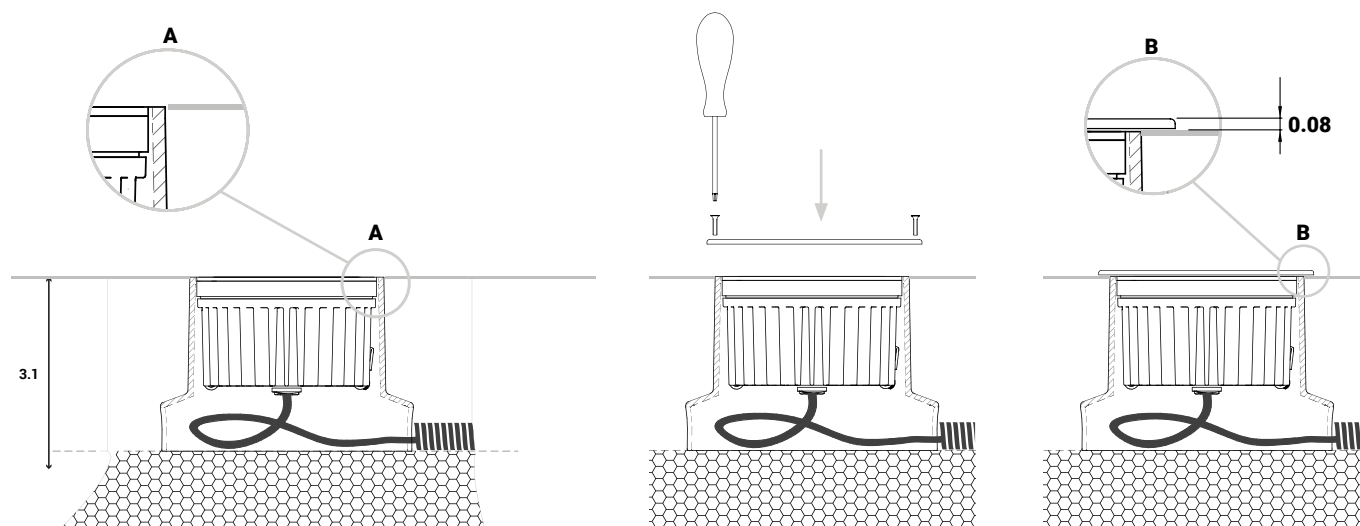

LOCKING SYSTEM

Technologically advanced outer casings that offer maximum aiming stability when using the adjustable version of the equipment thanks to the special grooves that stabilise the screw and prevent rotation thereof over time.

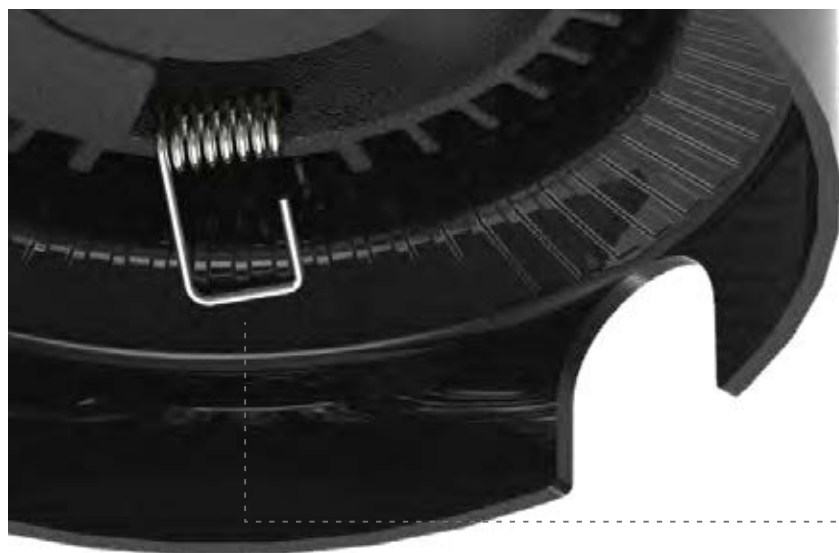

Maximum aiming stability when using the tilting version (Orma Trim Flush Adjustable)








orma

Materials

Aluminium body

AISI 316L stainless steel flange

Orma Flush Trim | Wall Washer | 2.1" Ø



C.C. 4W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu E83631	M 2700	490 - 129	07 Asymm. -
	W 3000	490 - 129	
	N 4000	529 - 140	

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures


C.V. 24 V - 5W DC	Cct	lm S - D	Optic
Steel/Alu E83633	M 2700	490 - 129	07 Asymm. -
	W 3000	490 - 129	
	N 4000	529 - 140	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E99650 Concrete Casing PVC Ø2.2 3 Ø3.8	E99560* Round Vandal Resistant Casing PVC Ø2.8 3.1 Ø3.8
E99855* Square Vandal Resistant Casing PVC 2.9 3.1 Ø3.8	E83251 Tile Casing PVC 3 Ø2.2

Orma Flush Trim | Wall Washer | 3.3" Ø



C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
Steel/Alu E83635	M 2700	1080 - 300	07 Asymm. -
	W 3000	1126 - 313	
	N 4000	1188 - 330	

Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures


C.V. 24 V - 9W DC	Cct	lm S - D	Optic
Steel/Alu E83637	M 2700	1193 - 333	07 Asymm. -
	W 3000	1244 - 347	
	N 4000	1313 - 366	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E99651 Concrete Casing PVC Ø3.4 3 Ø4.5	E99563* Round Vandal Resistant Casing PVC Ø4.1 3.1 Ø4.5
E99856* Square Vandal Resistant Casing PVC 4.1 3.1 Ø114	E83252 Tile Casing PVC 3 Ø3.4

Orma Flush Trim | Wall Washer | 4.9" Ø



C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu E83639	M 2700	1724 - 598	07 Asymm. -
	W 3000	1724 - 598	
	N 4000	1854 - 643	

Power supply options (remote only)



ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

E99652 Concrete Casing PVC Ø5 3 Ø6.1	E99564 Round Vandal Resistant Casing PVC Ø5.7 3.1 Ø6.1
E99857* Square Vandal Resistant Casing PVC 5.7 3.1 Ø6.1	E83253 Tile casing PVC 3 Ø5

NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush. Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL). Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min. NOT suitable for submersible installations. Inter-lux reserves the right to make technical changes without notice.

technical
information

Orma Semi-Flush Trim | Wall Washer | 2.5" Ø



C.C. 4W DC 350 mA	Cct	Im S - D	Optic
Steel/Alu E83630	M 2700	490 - 129	07 Asymm. -
Brass/Alu E84310	W 3000	490 - 129	
	N 4000	529 - 140	



Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECODrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---



C.V. 24 V - 5W DC	Cct	Im S - D	Optic
Steel/Alu E83632	M 2700	490 - 129	07 Asymm. -
Brass/Alu E84311	W 3000	490 - 129	
	N 4000	529 - 140	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Semi-Flush Trim | Wall Washer | 3.8" Ø



C.C. - 8W DC 220 mA	Cct	Im S - D	Optic
Steel/Alu E83634	M 2700	1080 - 300	07 Asymm. -
Brass/Alu E84312	W 3000	1126 - 313	
	N 4000	1188 - 330	



Power supply options (remote only)

ECO30W-220 0-10V EldoLED ECODrive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--


C.V. 24 V - 9W DC	Cct	Im S - D	Optic
Steel/Alu E83636	M 2700	1193 - 333	07 Asymm. -
Brass/Alu E84313	W 3000	1244 - 347	
	N 4000	1313 - 366	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--





Orma Semi-Flush Trim | Wall Washer | 5.4" Ø



C.C. - 12W DC 350 mA	Cct	Im S - D	Optic
Steel/Alu E83638	M 2700	1724 - 598	07 Asymm. -
Brass/Alu E84314	W 3000	1724 - 598	
	N 4000	1854 - 643	

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECODrive 30W for 1 fixture	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--




technical
information


Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Wall Washer Optics

Optics conceived for wall and floor recessed installation, they allow the creation of perfectly marked and visible luminous paths. The particular Washer optics allow the luminous cone to be sectioned in favour of high visual comfort and to be easily directed so that the positioning is not restricted in the installation phase.

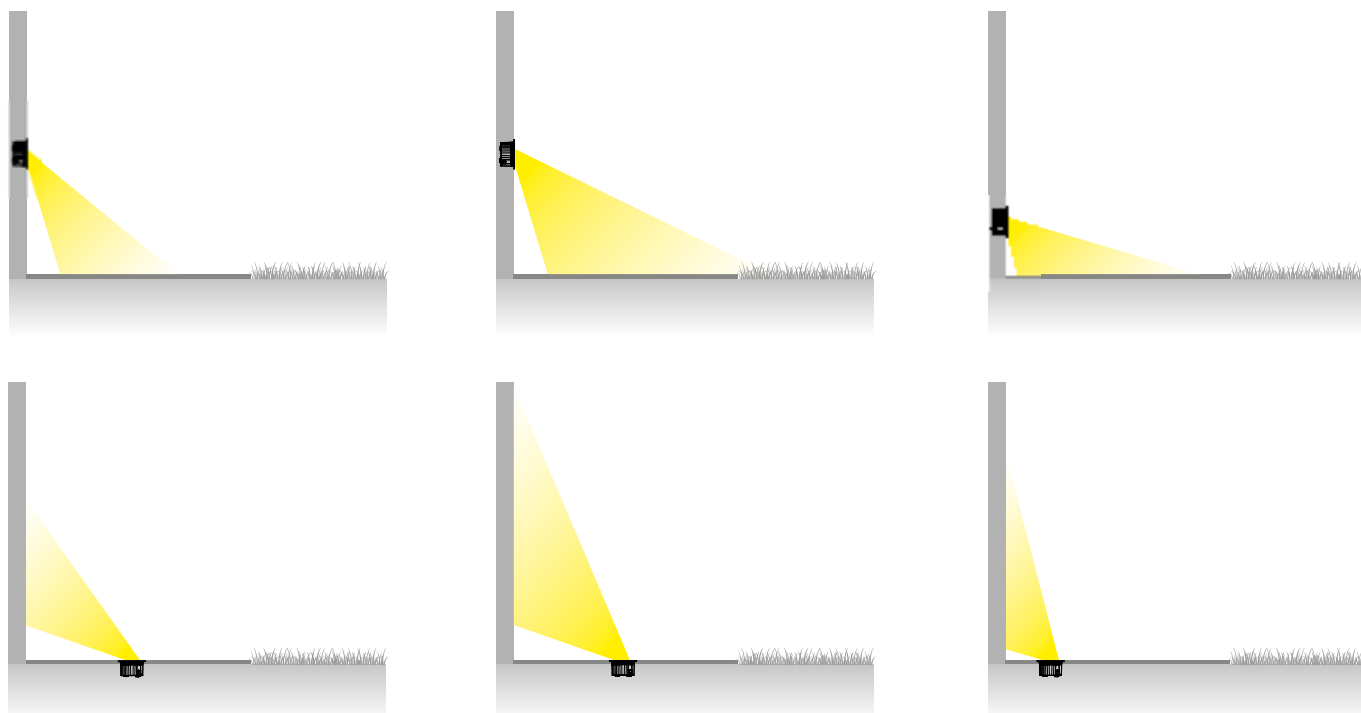

Thanks to the tilting system built into the optics compartment, Orma Wall Washer is able to adapt to different installation heights, defining the diffusion of the light up to 9.8 feet away from the source.

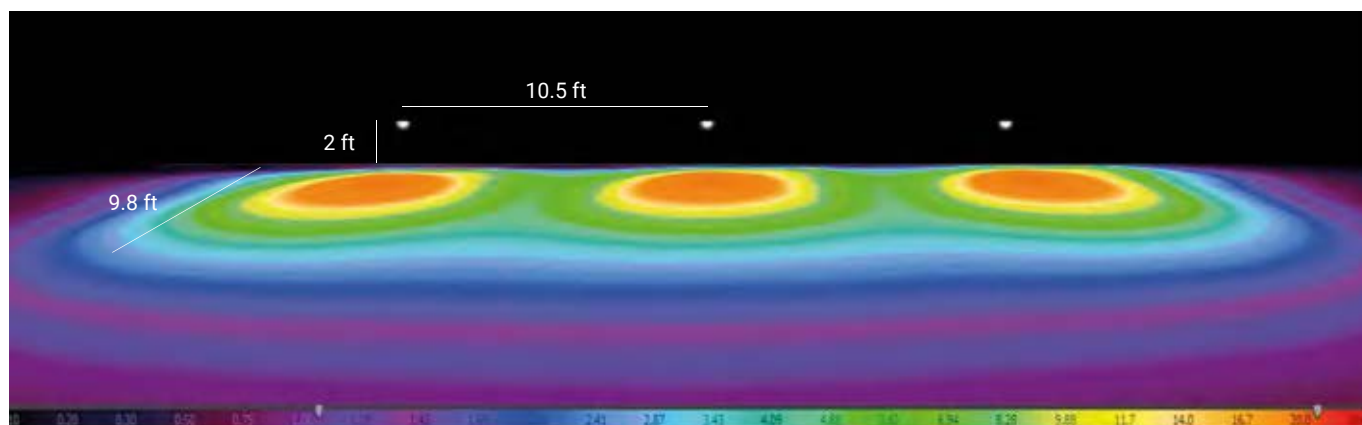

orma


Materials

Aluminum body

AISI 316L stainless steel flange



Orma Flush Trim | Blade | 2.5" Ø







C.C. - 8W DC 630 mA	Cct	lm S - D	Optic
Steel/Alu E83642	M 2700	1080 - 219	18 E.W.Flood -
	W 3000	1126 - 219	
	N 4000	1188 - 236	

Power supply options (remote only)

ECO30W-630 0-10V EldoLED ECODrive 30W for 1-3 fixtutes	SOL050W-630 0-10V EldoLED SOLODrive 50W for 1-4 fixtutes	SOL0100W-630 0-10V EldoLED SOLODrive 100W for 1-8 fixtutes	
C.V. 9W DC 24VDC	Cct	lm S - D	Optic
SteelAlu E83643	M 2700	1193 - 219	18 E.W.Flood -
	W 3000	1244 - 219	
	N 4000	1313 - 236	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location




technical
information

NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Uplights and in-ground lamps

Orma Semi-Flush Trim | Blade | 3.8" Ø





C.C. - 8W DC 630 mA	Cct	lm S - D	Optic
Steel/Alu E83644	M 2700	1080 - 219	18 E.W.Flood -
Brass/Alu E84316	W 3000	1126 - 219	
	N 4000	1188 - 236	

Power supply options (remote only)

ECO30W-630	SOL050W-630	SOL0100W-630	
0-10V EldoLED ECOdrive 30W for 1-3 fixtutes	0-10V EldoLED SOL0drive 50W for 1-4 fixtutes	0-10V EldoLED SOL0drive 100W for 1-8 fixtutes	
C.V. 9W DC 24VDC	Cct	lm S - D	Optic
 E83645	M 2700	1193 - 219	18 E.W.Flood -
 E84317	W 3000	1244 - 219	
	N 4000	1313 - 236	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



inter-lux.com

K50

ORMA



orma

Materials

Aluminium body

Extra-clear tempered glass diffuser






orma range



	OR-TL-F	OR-TL-A	OR-TL-FR	OR-TL-CO	OR-FT-F	OR-FT-A	OR-FT-WW
							
	Orma Trimless Flush Fixed	Orma Trimless Flush Adjustable	Orma Trimless Flush Frosted	Orma Trimless Flush Concentric	Orma Flush Trim Fixed	Orma Flush Trim Adjustable	Orma Flush Trim Wall Washer
Ø0.9"	1W CC 1.5W CV	-	1W CC 1.5W CV	-	-	-	-
Ø1.7"	-	-	-	1.5W CV	-	-	-
Ø2.1" - Ø2.2"	4W CC 5W CV	4W CC 5W CV	1W CC 1.5W CV	1W CC 1.5W CV	4W CC 5W CV	4W CC 5W CV	4W CC 5W CV
Ø2.5"	-	-	-	-	-	-	-
Ø3.3" - Ø3.4"	8W CC 9W CV	8W CC 9W CV	2W CC 2.5W CV	2W CC 2.5W CV	8W CC - 9W CV 8W RGBW	8W CC 9W CV	8W CC 9W CV
Ø3.8"	-	-	-	-	-	-	-
Ø4.9" - Ø5"	12W CC	12W CC	4W CC 5W CV	4W CC 5W CV	12W CC	12W CC	12W CC
Ø5.4"	-	-	-	-	-	-	-
Accessories	 		-	-	 		-
Finish				  			
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW	2700K 3000K 4000K	2700K 3000K 4000K
Optic	Spot Flood Wide Flood	Spot Flood Wide Flood	General	General	Spot Flood Wide Flood Elliptical	Spot Flood Wide Flood	Asymmetric

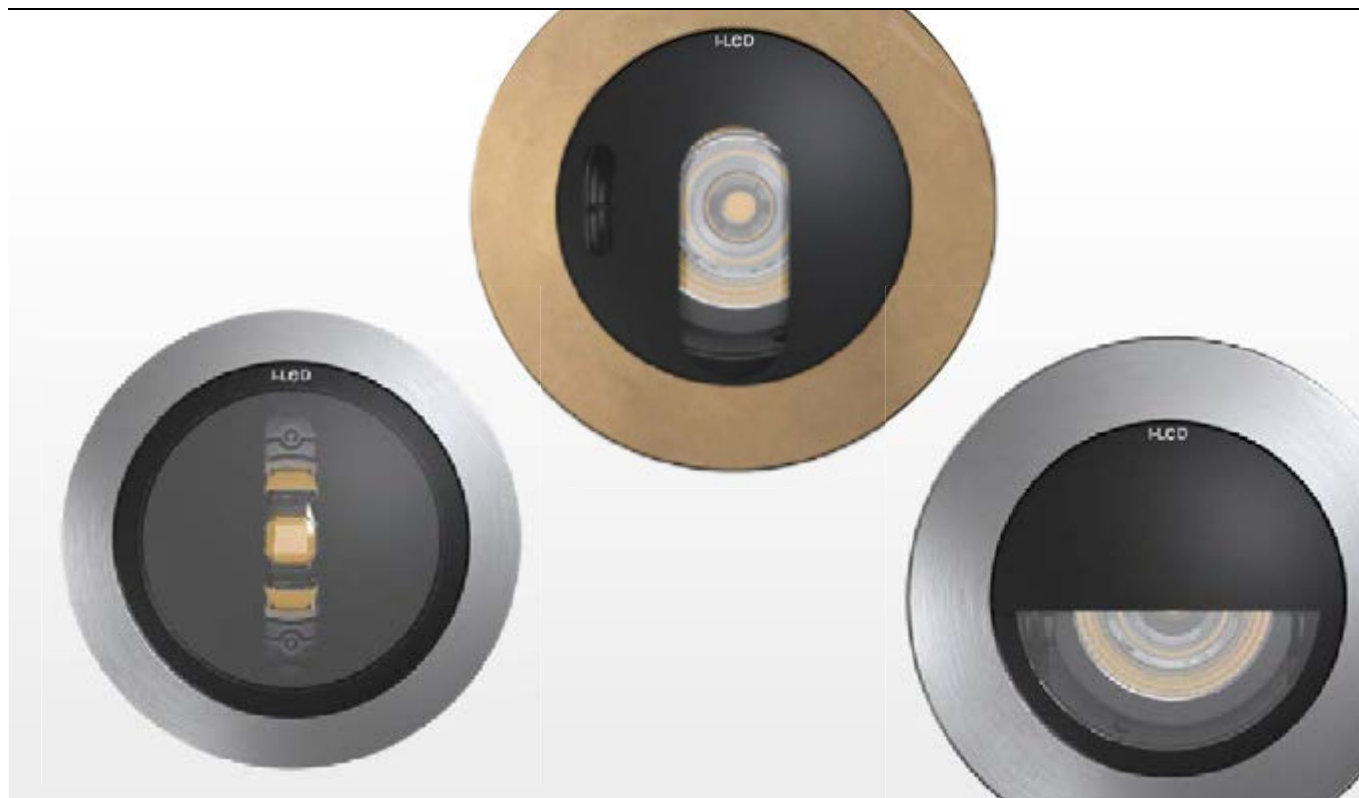

	OR-SFST/BT-BL	OR-FT-FR	OR-SFST/BT-F	OR-SFST/BT-A	OR-SFST/BT-WW	OR-FT-BL	OR-SFST/BT-FR
							
	Orma Semi-Flush Trim Blade	Orma Flush Trim Frosted	Orma Semi-Flush Trim Fixed	Orma Semi-Flush Trim Adjustable	Orma Semi-Flush Trim Wall Washer	Orma Flush Trim Blade	Orma Semi-Flush Trim Frosted
Ø0.9"	-	-	-	-	-	-	-
Ø1.7"	-	-	-	-	-	-	-
Ø2.1" - Ø2.2"	-	1W CC 1.5W CV	-	-	-	-	-
Ø2.5"	-	-	4W CC 5W CV	4W CC 5W CV	4W CC 5W CV	-	1W CC 1.5W CV
Ø3.3" - Ø3.4"	-	2W CC 2.5W CV	-	-	-	8W CC 9W CV	-
Ø3.8"	8W CC 9W CV	-	8W CC - 9W CV 8W RGBW	8W CC 9W CV	8W CC 9W CV	-	2W CC 2.5W CV
Ø4.9" - Ø5"	-	4W CC 4.5W CV	-	-	-	-	-
Ø5.4"	-	-	12W CC	12W CC	12W CC	-	4W CC 5W CV
Accessories	-	-	HC DL	HC	-	-	-
Finish	Steel Alu Brass Alu	Steel Alu	Steel Alu Brass Alu	Steel Alu Brass Alu	Steel Alu Brass Alu	Steel Alu	Steel Alu Brass Alu
CRI 80	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K RGBW	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K	2700K 3000K 4000K
Optic	Extra Wide Flood	General	Spot Flood Wide Flood Elliptical	Spot Flood Wide Flood	Asymmtric	Extra Wide Flood	General

Broad Range

Orma is a complete recess-mounted family with compact sizes, and sturdy, reliable materials with high grades of protection: temporary IK10 and IP68¹, ideal for tight installation spaces.


In addition to the embossed steel flange, the range is enriched by the new Brass finish. The recess-mounted steel flange is completed by the brand new version with an all-glass front flush with the floor and a path-marker with concentric optics.

The adjustable version can be easily and quickly aimed through the screw system on the side of the fixture body, without have to open and remove the top trim/glass.

This breakthrough concept entirely remove the risk of water infiltration during the on site aiming process. Orma was conceived with a unique application versatility which provides the designer with a vast range of possible beams, finish and optics combinations. Flush, all-glass or in metal, Orma can adapt to any setting, even the most unusual one, thanks to the possibility of choosing from no less than eight diameters and square-shaped flange. On a technical lighting level, new optics packages are introduced: Spot, Flood, Wide Flood, Extra Wide Flood, General, Elliptical, asymmetrical swing with Wall Washer optics.

1 Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min. NOT suitable for submersible installations.





2 Fixtures have an overall depth of 3" including casing. 1" variants are deeper than 3".



Blade Optics


The Blade optics let you light windows, arches and architraves, emphasising the architecture and its details. The entirely recess-mounted structure lets the window or door open and close without interference.

The light beam is very narrow laterally and then opens up to almost 180° at the front, enhancing the inner face of the openings without glare or light pollution.

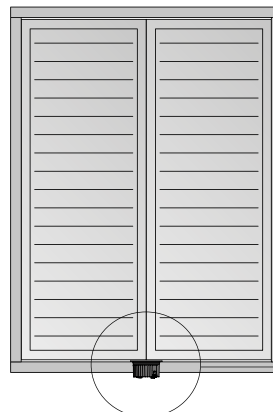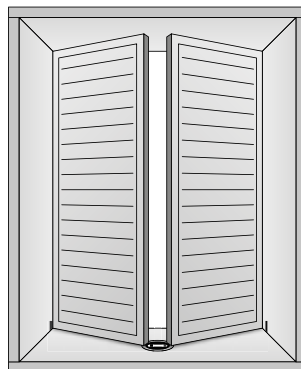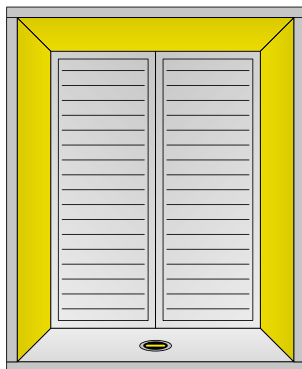


Concentric Optics

An exclusive design, recess-mounted path marker, flush with the pavement, it is capable of creating beautiful effects and giving the paths correct directionality with a sturdy structure capable of withstanding traffic weighing up to 4400 lb. The family includes four diameters: 1.7 in, 2.2 in, 3.4 in, 5 in and 5 power versions: 1 W, 1.5 W, 2 W, 2.5 W, 4 W, 5 W. A diverse and vast range available to professionals and their creativity.

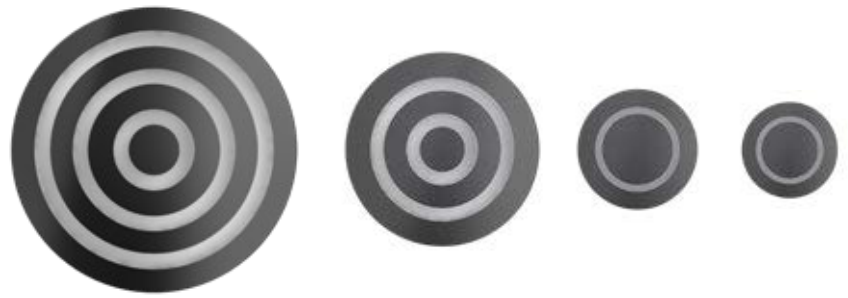


Wall Washer Optics



Optics conceived for wall and floor recessed installation, they allow the creation of perfectly marked and visible luminous paths. The particular Washer optics allow the luminous cone to be sectioned in favour of high visual comfort and to be easily directed so that the positioning is not restricted in the installation phase.

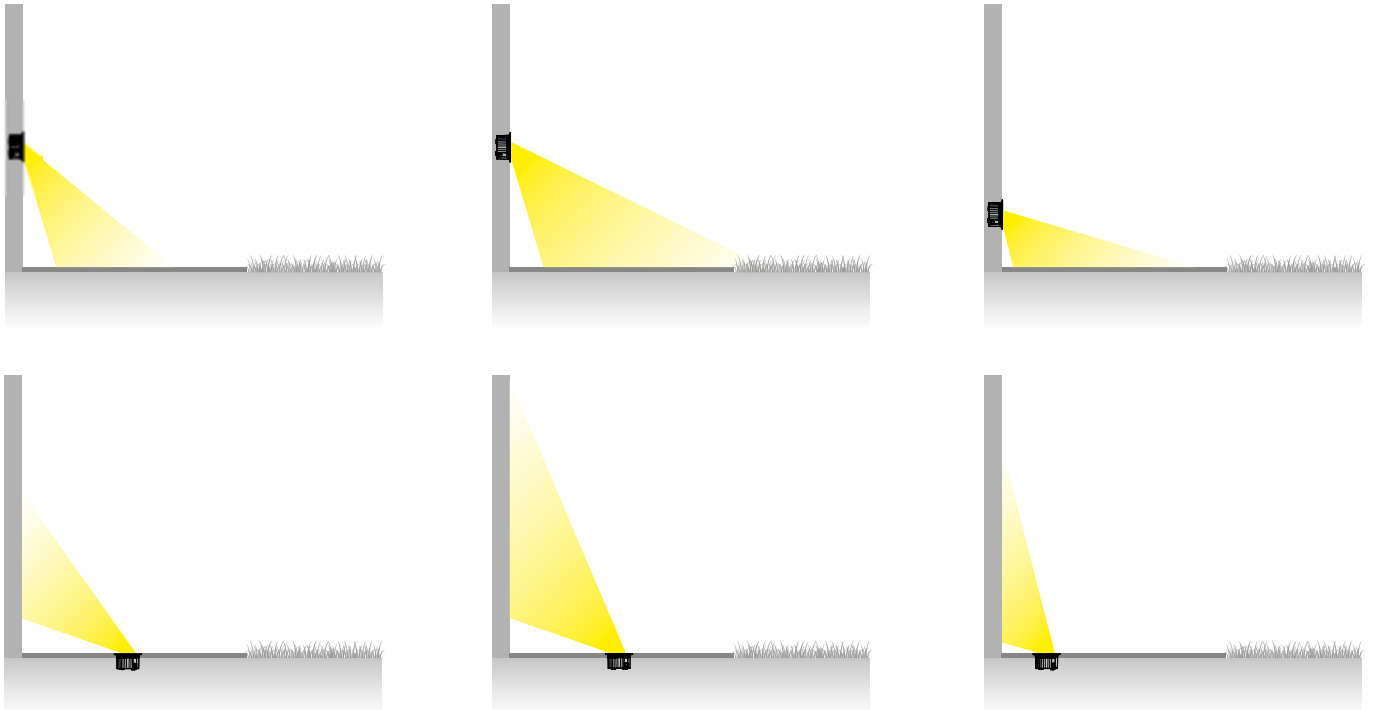

Thanks to the tilting system built into the optics compartment, Orma Wall Washer is able to adapt to different installation heights, defining the diffusion of the light up the 9.8 feet away from the source.

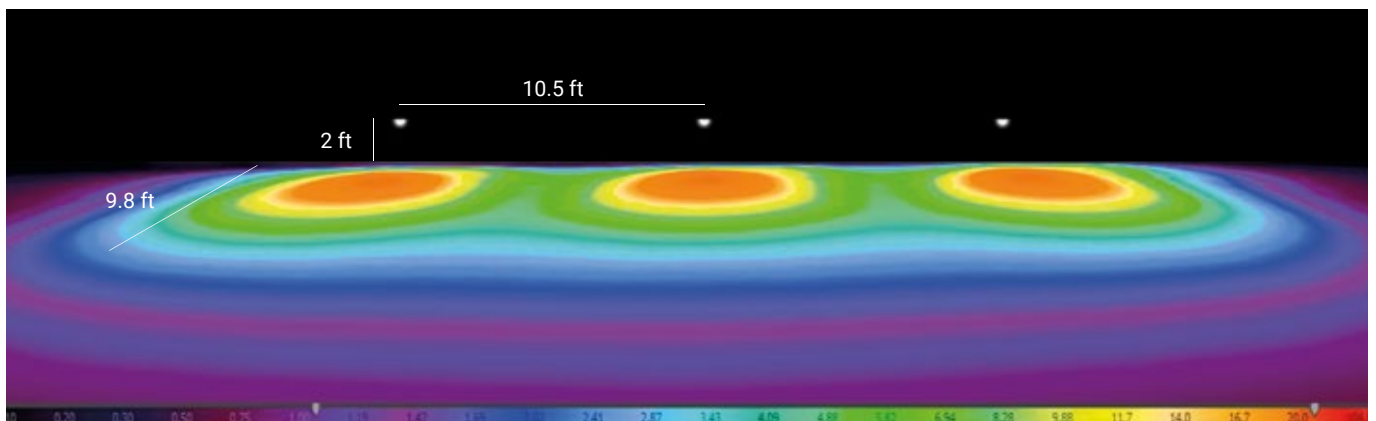

Orma Trimless Flush | Fixed | 0.9" Ø (CC)



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82697	M 2700	136 - 71	20 Spot -
	W 3000	145 - 76	35 Flood -
	N 4000	155 - 81	

Power supply options (remote only)

ECO30W-350

0-10V EldoLED
ECOdrive 30W
for 1-10 fixtures

SOLO50W-350

0-10V EldoLED
SOLOdrive 50W
for 1-20 fixtures

SOLO100W-350

0-10V EldoLED
SOLOdrive 100W
for 1-40 fixtures


E83036

Concrete
casing
PVC




E99925

Tile
casing
PVC



Orma Trimless Flush | Fixed | 0.9" Ø (CV)



C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82698	M 2700	136 - 71	20 Spot -
	W 3000	145 - 76	35 Flood -
	N 4000	155 - 81	

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied
in a Dry location enclosure

OT96-JBX

Osram, Non-dim 24VDC,
120-277VAC, Wet location


E83037

Concrete
casing
PVC





E99925

Tile
casing
PVC



Orma Trimless Flush | Fixed | 2.2" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82657	M 2700	490 - 288	15 Spot -
Glass Alu E82658 HC	W 3000	490 - 288	25 Elliptical* -
Glass Alu E82659 DL	N 4000	529 - 311	30 Flood -
			60 W.Flood -

*Elliptical available with E82657 only.

Power supply options (remote only)

ECO30W-350

0-10V EldoLED
ECOdrive 30W
for 1-3 fixtures

SOLO50W-350

0-10V EldoLED
SOLOdrive 50W
for 1-6 fixtures

SOLO100W-350

0-10V EldoLED
SOLOdrive 100W
for 1-12 fixtures

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82660	M 2700	490 - 288	15 Spot -
Glass Alu E82661 HC	W 3000	490 - 288	25 Elliptical* -
Glass Alu E82662 DL	N 4000	529 - 311	30 Flood -
			60 W.Flood -

*Elliptical available with E82660 only.

Power supply options (remote only)

OT96-D010

Osram, 10% 0-10V dim, 96W,
24VDC, 120-277VAC, supplied
in a Dry location enclosure

OT96-JBX

Osram, Non-dim 24VDC,
120-277VAC, Wet location

E83038

Concrete
casing
PVC




E99922

Tile
casing
PVC



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trimless Flush | Fixed | 3.4" Ø



C.C. 8W DC - 220mA	Cct	lm S - D	Optic
Glass Alu E82669	M 2700	1080 - 689	15 Spot -
Glass Alu E82670 HC	W 3000	1126 - 718	30 Flood -
Glass Alu E82671 DL	N 4000	1188 - 758	60 W.Flood -

Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

C.V. 9W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82672	M 2700	1193 - 689	15 Spot -
Glass Alu E82673 HC	W 3000	1244 - 718	30 Flood -
Glass Alu E82674 DL	N 4000	1313 - 758	60 W.Flood -

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



E83039
Concrete
casing
PVC



E99923
Tile
casing
PVC



Orma Trimless Flush | Fixed | 5.0" Ø



C.C. 12W - 350mA	Cct	lm S - D	Optic
Glass Alu E82683	M 2700	1724 - 1365	15 Spot -
Glass Alu E82684 HC	W 3000	1724 - 1365	30 Flood -
Glass Alu E82685 DL	N 4000	1854 - 1466	60 W.Flood -


Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

E83040
Concrete
casing
PVC




E99924
Tile
casing
PVC



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trimless Flush | Adjustable | 2.2" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82663	M 2700	490 - 288	15 Spot -
	W 3000	490 - 288	30 Flood -
	N 4000	529 - 311	60 W.Flood -

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82664	M 2700	490 - 288	15 Spot -
	W 3000	490 - 288	30 Flood -
	N 4000	529 - 311	60 W.Flood -

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



E83038
Concrete
casing
PVC



E99922
Tile
casing
PVC



Orma Trimless Flush | Adjustable | 3.4" Ø



C.C. 8W DC - 220mA	Cct	lm S - D	Optic
Glass Alu E82675	M 2700	1080 - 693	15 Spot -
Glass Alu E82676 HC	W 3000	1126 - 722	30 Flood -
	N 4000	1188 - 763	60 W.Flood -

Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

C.V. 9W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82677	M 2700	1193 - 693	15 Spot -
Glass Alu E82678 HC	W 3000	1244 - 722	30 Flood -
	N 4000	1313 - 763	60 W.Flood -

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83039
Concrete
casing
PVC




E99923
Tile
casing
PVC



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trimless Flush | Adjustable | 5.0" Ø



C.C. 12W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82689	M 2700	1724 - 1203	15 Spot -
Glass Alu E82690 HC	W 3000	1724 - 1203	30 Flood -
	N 4000	1854 - 1292	60 W.Flood -

Power supply options (remote only)

EC030W-350 0-10V EldoLED EC0drive 30W for 1 fixture	SOL050W-350 0-10V EldoLED SOL0drive 50W for 1-2 fixtures	SOL0100W-350 0-10V EldoLED SOL0drive 100W for 1-4 fixtures
---	--	--

E83040

Concrete casing

PVC



E99924


Tile casing

PVC



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.



Orma Trimless Flush | Frosted | 0.9" Ø (CC)




C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82699	M 2700	136 - 12	00 General -
	W 3000	145 - 13	
	N 4000	155 - 14	

Power supply options (remote only)

EC030W-350 0-10V EidoLED ECOdrive 30W for 1-10 fixtures	SOL050W-350 0-10V EidoLED SOLOdrive 50W for 1-20 fixtures	SOLO100W-350 0-10V EidoLED SOLOdrive 100W for 1-40 fixtures
---	---	---





Orma Trimless Flush | Frosted | 0.9" Ø (CV)




C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82700	M 2700	136 - 12	00 General -
	W 3000	145 - 13	
	N 4000	155 - 14	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Trimless Flush | Frosted | 2.2" Ø



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82667	M 2700	136 - 8	00 General -
	W 3000	145 - 8	
	N 4000	155 - 9	


Power supply options (remote only)

EC030W-350 0-10V EidoLED ECOdrive 30W for 1-10 fixtures	SOL050W-350 0-10V EidoLED SOLOdrive 50W for 1-20 fixtures	SOLO100W-350 0-10V EidoLED SOLOdrive 100W for 1-40 fixtures
---	---	---

C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82668	M 2700	136 - 8	00 General -
	W 3000	145 - 8	
	N 4000	155 - 9	


Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trimless Flush | Frosted | 3.4" Ø



C.C. 2W DC- 630mA	Cct	lm S - D	Optic
Glass Alu E82681	M 2700	249 - 15	00 General -
	W 3000	266 - 15	
	N 4000	284 - 16	



Power supply options (remote only)

EC030W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECODrive 30W for 1-10 fixtures	0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	0-10V EldoLED SOLOdrive 100W for 1-32 fixtures


C.V. 2.5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82682	M 2700	249 - 15	00 General -
	W 3000	266 - 15	
	N 4000	284 - 16	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



Orma Trimless Flush | Frosted | 5.0" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Glass Alu E82695	M 2700	490 - 50	00 General -
	W 3000	490 - 50	
	N 4000	529 - 54	



Power supply options (remote only)

EC030W-350	SOLO50W-350	SOLO100W-220
0-10V EldoLED ECODrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Glass Alu E82696	M 2700	490 - 50	00 General -
	W 3000	490 - 50	
	N 4000	529 - 54	



Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Trim Semi-Flush Trim | Concentric | 1.6" Ø




C.V. 1.5W DC - 24VDC		Cct	lm S - D	Optic
White	E95474	M 2700	136 - 54	00 General
Black	E95475	W 3000	145 - 60	
Grey	E95476	N 4000	155 - 63	

Power supply options (remote only)


OT96-D010
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX
Osram, Non-dim 24VDC, 120-277VAC, Wet location


E98291
Concrete casing



E98292
Tile casing
PVC



Orma Trim Semi-Flush Trim | Concentric | 2.2" Ø



C.C. 1W DC - 350mA		Cct	lm S - D	Optic
Black	E82665	M 2700	136 - 6	00 General -
		W 3000	145 - 6	
		N 4000	155 - 7	

Power supply options (remote only)

EC030W-350
0-10V EldoLED
EC0drive 30W
for 1-10 fixtures

SOLO50W-350
0-10V EldoLED
SOLOdrive 50W
for 1-20 fixtures

SOLO100W-350
0-10V EldoLED
SOLOdrive 100W
for 1-40 fixtures

C.V. 1.5W DC - 24VDC		Cct	lm S - D	Optic
Black	E82666	M 2700	136 - 6	00 General -
		W 3000	145 - 6	
		N 4000	155 - 7	

Power supply options (remote only)

OT96-D010
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure

OT96-JBX
Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83038
Concrete casing
PVC




E99922
Tile casing
PVC



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.



Orma Trimless Flush | Concentric | 3.4" Ø



C.C. 2W DC - 630mA	Cct	lm S - D	Optic
Black E82679	M 2700	249 - 13	00 General -
	W 3000	266 - 13	
	N 4000	284 - 14	

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EidoLED ECODrive 30W for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W for 1-16 fixtures	0-10V EidoLED SOLOdrive 100W for 1-32 fixtures

C.V. 2.5W DC - 24 VDC	Cct	lm S - D	Optic
Black E82680	M 2700	249 - 13	00 General -
	W 3000	266 - 13	
	N 4000	284 - 14	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83039

Concrete
casing
PVC





E99923

Tile
casing
PVC



Orma Trimless Flush | Concentric | 5.0" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Black E82693	M 2700	490 - 34	00 General -
	W 3000	490 - 34	
	N 4000	529 - 37	

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-220
0-10V EidoLED ECODrive 30W for 1-3 fixtures	0-10V EidoLED SOLOdrive 50W for 1-6 fixtures	0-10V EidoLED SOLOdrive 100W for 1-12 fixtures


C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Black E82694	M 2700	490 - 34	00 General -
	W 3000	490 - 34	
	N 4000	529 - 37	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E83040

Concrete
casing
PVC



E99924



Tile
casing
PVC



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.



Orma Flush Trim | Fixed | 2.1" Ø



C.C. 4W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu E81181	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

HC	Cct	Im S - D	Optic
Steel/Alu E81182	M 2700	490 - 187	15 Spot (20°)
	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)

DL	Cct	Im S - D	Optic
Steel/Alu E81183	M 2700	490 - 194	15 Spot (22°)
	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	0-10V EldoLED SOLOdrive 100W for 1-12 fixtures

C.V. 5W DC - 24 VDC	Cct	Im S - D	Optic
Steel/Alu E81184	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

HC	Cct	Im S - D	Optic
Steel/Alu E81185	M 2700	490 - 187	15 Spot (20°)
	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)

DL	Cct	Im S - D	Optic
Steel/Alu E81186	M 2700	490 - 194	15 Spot (22°)
	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E99650

Concrete casing
PVC




E99560*

Round Vandal
Resistant Casing
PVC



E99855*

Square Vandal
Resistant casing
PVC





E83203

Tile casing
PVC



RTG **E81181W15 / E81181W30**

Orma Flush Trim | Fixed | 3.3" Ø



C.C. - 8W DC - 220 mA	Cct	Im S - D	Optic
Steel/Alu E81187	M 2700	1080 - 858	15 Spot (15°)
	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	Im S - D	Optic
Steel/Alu E81188	M 2700	1080 - 619	15 Spot (15°)
	W 3000	1126 - 646	30 Flood (27°)
	N 4000	1188 - 681	60 W.Flood (49°)

DL	Cct	Im S - D	Optic
Steel/Alu E81189	M 2700	1080 - 576	15 Spot (16°)
	W 3000	1126 - 600	30 Flood (29°)
	N 4000	1188 - 634	60 W.Flood (53°)

Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures

C.V. 9W DC - 24 VDC	Cct	Im S - D	Optic
Steel/Alu E81190	M 2700	1193 - 955	15 Spot (15°)
	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	Im S - D	Optic
Steel/Alu E81191	M 2700	1193 - 687	15 Spot (15°)
	W 3000	1244 - 716	30 Flood (27°)
	N 4000	1313 - 756	60 W.Flood (49°)

DL	Cct	Im S - D	Optic
Steel/Alu E81192	M 2700	1193 - 639	15 Spot (16°)
	W 3000	1244 - 667	30 Flood (29°)
	N 4000	1313 - 704	60 W.Flood (53°)

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).

Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min. NOT suitable for submersible installations.

Inter-lux reserves the right to make technical changes without notice.

Orma Flush Trim | Fixed | 3.3" Ø (RGBW)



RGBW - 8W DC - 630 mA	Cct	Optic
Steel/Alu E81322	Q RGBW natural white	06 N.Spot -
	V RGBW warm white	15 Spot -
		45 W.Flood -
		00 General -

Power supply options (remote only)

PWR50W-630
DMX EldoLED
POWERdrive 50W
for 1-5 fixtures


E99651
Concrete
casing
PVC




E99563*
Round Vandal
Resistant casing
PVC



E99856*
Square Vandal
Resistant casing
PVC



E83201
Tile
casing
PVC



Feed Cables**

E99216	E89190	E98476	E98477
59 in. DC(+) power cable F 4 pin M12	196 in. DC(+) power cable F 4 pin M12	59 in. DC(-) power cable M 4 pin M12	196 in. DC(-) power cable M 4 pin M12

** One Female DC(+) and one Male DC(-) required per driver



Extension Cables***

E98437	E98149	E89188
39 in. Extension power cable M+F 4 pin M12	196.85 in. Extension for power cable M+F 4 pin M12	393.7 in. Extension for power cable M+F 4 pin M12

***Required between fixtures powered from the same driver

RTG E81187W30

Orma Flush Trim | Fixed | 4.9" Ø



C.C. 12W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu E81193	M 2700	1724 - 1379	15 Spot (14°)
	W 3000	1724 - 1379	30 Flood (31°)
	N 4000	1854 - 1485	60 W.Flood (60°)

HC	Cct	Im S - D	Optic
Steel/Alu E81194	M 2700	1724 - 981	15 Spot (14°)
	W 3000	1724 - 981	30 Flood (28°)
	N 4000	1854 - 1055	60 W.Flood (49°)

DL	Cct	Im S - D	Optic
Steel/Alu E81195	M 2700	1724 - 1094	15 Spot (14°)
	W 3000	1724 - 1094	30 Flood (30°)
	N 4000	1854 - 1178	60 W.Flood (52°)

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EldoLED ECOdrive 30W for 1 fixture	0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	0-10V EldoLED SOLOdrive 100W for 1-4 fixtures


E99652
Concrete
casing
PVC




E99564*
Round Vandal
Resistant Casing
PVC



E99857*
Square Vandal
Resistant Casing
PVC




E83202
Tile
casing
PVC



NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Flush Trim | Adjustable | 2.1" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81205	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)

Power supply options (remote only)

EC030W-350 0-10V EldoLED EC0drive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81206	M 2700	490 - 272	15 Spot (22°)
	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

E99650

Concrete casing
PVC



E99560*

Round Vandal
Resistant Casing
PVC



E99855*

Square Vandal
Resistant Casing
PVC




E83203

Tile
Casing
PVC



Orma Flush Trim | Adjustable | 3.3" Ø



C.C. - 8W DC - 220 mA	Cct	lm S - D	Optic
Steel/Alu E81207	M 2700	1080 - 858	15 Spot (15°)
	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E82460	M 2700	1080 - 619	15 Spot -
	W 3000	1126 - 646	30 Flood -
	N 4000	1188 - 681	60 W.Flood -

Power supply options (remote only)

EC030W-220 0-10V EldoLED EC0drive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

C.V. 9W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81208	M 2700	1193 - 955	15 Spot (15°)
	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E82461	M 2700	1193 - 687	15 Spot -
	W 3000	1244 - 716	30 Flood -
	N 4000	1313 - 761	60 W.Flood -

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

E99651

Concrete casing
PVC




E99563*

Round Vandal
Resistant Casing
PVC




E99856*

Square Vandal
Resistant Casing
PVC



E83201

Tile
Casing
PVC




NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).

Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min. NOT suitable for submersible installations.




Inter-lux reserves the right to make technical changes without notice.



C.C. - 12W DC - 350 mA	Cct	Im S - D	Optic
 E81209	M 2700	1724 - 1317	15 Spot (22°)
	W 3000	1724 - 1317	30 Flood (34°)
	N 4000	1854 - 1417	60 W.Floos (61°)


HC	Cct	Im S - D	Optic
Steel/Alu E82462	M 2700	1724 - 935	15 Spot -
	W 3000	1724 - 935	30 Flood -
	N 4000	1854 - 1005	60 W.Flood -

EC030W-350	SOLO50W-350	SOLO100W-350
0-10V EdoLED EC0drive 30W for 1 fixture	0-10V EdoLED SOLOdrive 50W for 1-2 fixtures	0-10V EdoLED SOLOdrive 100W for 1-4 fixtures



inter-lux.com/linealight

Orma Flush Trim | Frosted | 2.1" Ø



C.C. 1W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81217	M 2700	136 - 17	00 General (117°)
	W 3000	145 - 18	
	N 4000	155 - 19	

Power supply options (remote only)

EC030W-350	SOLO50W-350	SOLO100W-350
0-10V EidoLED ECODrive 30W for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W for 1-20 fixtures	0-10V EidoLED SOLOdrive 100W for 1-40 fixtures

C.V. 1.5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81218	M 2700	136 - 17	00 General (117°)
	W 3000	145 - 18	
	N 4000	155 - 19	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E99650
Concrete
casing
PVC




E99560*
Round Vandal
Resistant Casing
PVC




E99855*
Square Vandal
Resistant Casing
PVC



E83203
Tile
Casing
PVC



Orma Flush Trim | Frosted | 3.3" Ø



C.C. 2W DC - 630 mA	Cct	lm S - D	Optic
Steel/Alu E81219	M 2700	249 - 25	00 General (118°)
	W 3000	266 - 26	
	N 4000	284 - 28	

Power supply options (remote only)

EC030W-630	SOLO50W-630	SOLO100W-630
0-10V EidoLED ECODrive 30W for 1-10 fixtures	0-10V EidoLED SOLOdrive 50W for 1-16 fixtures	0-10V EidoLED SOLOdrive 100W for 1-32 fixtures

C.V. 2.5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81220	M 2700	249 - 25	00 General (118°)
	W 3000	266 - 26	
	N 4000	284 - 28	


Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location


E99651
Concrete
Casing
PVC



E99563*
Round Vandal
Resistant Casing
PVC



E99856*
Square Vandal
Resistant Casing
PVC




E83201
Tile
Casing
PVC



NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Flush Trim | Frosted | 4.9" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81221	M 2700	490 - 90	00 General (116°)
	W 3000	490 - 90	
	N 4000	529 - 97	




Power supply options (remote only)

EC030W-350 0-10V EldoLED EC0drive 30W for 1-3 fixtures	SOL050W-350 0-10V EldoLED SOL0drive 50W for 1-6 fixtures	SOL0100W-350 0-10V EldoLED SOL0drive 100W for 1-12 fixtures
--	--	---

C.V. 4.5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81222	M 2700	490 - 90	00 General (116°)
	W 3000	490 - 90	
	N 4000	529 - 97	



Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Semi-Flush Trim | Fixed | 2.5" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E80582	M 2700	490 - 272	15 Spot (22°)
Brass/Alu E84289	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

HC	Cct	lm S - D	Optic
Steel/Alu E80583	M 2700	490 - 187	15 Spot (20°)
Brass/Alu E84290	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)

DL	Cct	lm S - D	Optic
Steel/Alu E80584	M 2700	490 - 194	15 Spot (22°)
Brass/Alu E84291	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)

Power supply options (remote only)

EC030W-350 0-10V EldoLED ECODrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E80585	M 2700	490 - 272	15 Spot (22°)
Brass/Alu E84292	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)
			25 Elliptical -

HC	Cct	lm S - D	Optic
Steel/Alu E80586	M 2700	490 - 187	15 Spot (20°)
Brass/Alu E84293	W 3000	490 - 187	30 Flood (25°)
	N 4000	529 - 202	60 Flood (37°)

DL	Cct	lm S - D	Optic
Steel/Alu E80587	M 2700	490 - 194	15 Spot (22°)
Brass/Alu E84294	W 3000	490 - 194	30 Flood (30°)
	N 4000	529 - 209	60 W.Flood (55°)

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



E99650
Concrete
Casing
PVC



E83203
Tile
casing
PVC



Orma Semi-Flush Trim | Fixed | 3.8" Ø



C.C. - 8W DC - 220 mA	Cct	lm S - D	Optic
Steel/Alu E80588	M 2700	1080 - 858	15 Spot (15°)
Brass/Alu E84295	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E80589	M 2700	1080 - 619	15 Spot (15°)
Brass/Alu E84296	W 3000	1126 - 646	30 Flood (27°)
	N 4000	1188 - 681	60 W.Flood (49°)

DL	Cct	lm S - D	Optic
Steel/Alu E80590	M 2700	1080 - 576	15 Spot (16°)
Brass/Alu E84297	W 3000	1126 - 600	30 Flood (29°)
	N 4000	1188 - 634	60 W.Flood (53°)

Power supply options (remote only)

EC030W-220 0-10V EldoLED ECODrive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

C.V. 9W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81172	M 2700	1193 - 955	15 Spot (15°)
Brass/Alu E84298	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E81173	M 2700	1193 - 687	15 Spot (15°)
Brass/Alu E84299	W 3000	1244 - 716	30 Flood (27°)
	N 4000	1313 - 756	60 W.Flood (49°)




DL	Cct	lm S - D	Optic
Steel/Alu E81174	M 2700	1193 - 639	15 Spot (16°)
Brass/Alu E84300	W 3000	1244 - 667	30 Flood (29°)
	N 4000	1313 - 704	60 W.Flood (53°)

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Semi-Flush Trim | Fixed | 3.8" Ø (RGBW)



RGBW - 8W DC - 630 mA	Cct	Optic
Steel/Alu E81321	Q RGBW natural white	06 N.Spot -
Brass/Alu E84301	V RGBW warm white	15 Spot -
		45 W.Flood -
		00 General -

Power supply options (remote only)

PWR50W-630

DMX EldoLED
POWERdrive 50W
for 1-5 fixtures

E99651

Concrete casing
PVC



E83201

Tile casing
PVC



RTG E80588W30 / E81321V45

Feed Cables**

E99216	E89190	E98476	E98477
59 in. DC(+) power cable F 4 pin M12	196 in. DC(+) power cable F 4 pin M12	59 in. DC(-) power cable M 4 pin M12	196 in. DC(-) power cable M 4 pin M12

** One Female DC(+) and one Male DC(-) required per driver



Extension Cables***

E98437	E98149	E89188
39 in. Extension power cable M+F 4 pin M12	196.85 in. Extension for power cable M+F 4 pin M12	393.7 in. Extension for power cable M+F 4 pin M12

***Required between fixtures powered from the same driver

Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Semi-Flush Trim | Fixed | 5.4" Ø



C.C. 12W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81175	M 2700	1724 - 1379	15 Spot (14°)
Brass/Alu E84302	W 3000	1724 - 1379	30 Flood (31°)
	N 4000	1854 - 1485	60 W.Flood (60°)

HC	Cct	lm S - D	Optic
Steel/Alu E81176	M 2700	1724 - 981	15 Spot (14°)
Brass/Alu E84303	W 3000	1724 - 981	30 Flood (28°)
	N 4000	1854 - 1055	60 W.Flood (49°)

DL	Cct	lm S - D	Optic
Steel/Alu E81177	M 2700	1724 - 1094	15 Spot (14°)
Brass/Alu E84304	W 3000	1724 - 1094	30 Flood (30°)
	N 4000	1854 - 1178	60 W.Flood (52°)

Power supply options (remote only)

EC030W-350

0-10V EldoLED
EC0drive 30W
for 1 fixture

SOLO50W-350

0-10V EldoLED
SOLOdrive 50W
for 1-2 fixtures

SOLO100W-350

0-10V EldoLED
SOLOdrive 100W
for 1-4 fixtures

E99652

Concrete casing
PVC




E83202

Tile casing
PVC



Orma Semi-Flush Trim | Adjustable | 2.5" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81199	M 2700	490 - 272	15 Spot (22°)
Brass/Alu E82521	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)

Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECOdrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81200	M 2700	490 - 272	15 Spot (22°)
Brass/Alu E82522	W 3000	490 - 272	30 Flood (29°)
	N 4000	529 - 294	60 W.Flood (48°)

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--

E99650

Concrete
casing
PVC




E83203

Tile
casing
PVC



Orma Semi-Flush Trim | Adjustable | 3.8" Ø



C.C. - 8W DC - 220mA	Cct	lm S - D	Optic
Steel/Alu E81201	M 2700	1080 - 858	15 Spot (15°)
Brass/Alu E82523	W 3000	1126 - 894	30 Flood (31°)
	N 4000	1188 - 944	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E82456	M 2700	1080 - 619	15 Spot -
Brass/Alu E82934	W 3000	1126 - 646	30 Flood -
	N 4000	1188 - 681	60 W.Flood -

Power supply options (remote only)

ECO30W-220 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--

C.V. 9W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81202	M 2700	1193 - 955	15 Spot (15°)
Brass/Alu E82524	W 3000	1244 - 997	30 Flood (31°)
	N 4000	1313 - 1052	60 W.Flood (61°)

HC	Cct	lm S - D	Optic
Steel/Alu E82457	M 2700	1193 - 687	15 Spot -
Brass/Alu E82935	W 3000	1244 - 716	30 Flood -
	N 4000	1313 - 756	60 W.Flood -

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--


E99651

Concrete
casing
PVC



E83201

Tile
casing
PVC




Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).

Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min. NOT suitable for submersible installations.

Inter-lux reserves the right to make technical changes without notice.

Orma Semi-Flush Trim | Adjustable | 5.4" Ø




C.C. - 12W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81203	M 2700	1724 - 1317	15 Spot (22°)
Brass/Alu E82525	W 3000	1724 - 1317	30 Flood (34°)
	N 4000	1854 - 1417	60 W.Flood (61°)


HC	Cct	lm S - D	Optic
Steel/Alu E82458	M 2700	1724 - 935	15 Spot -
Brass/Alu E84308	W 3000	1724 - 935	30 Flood -
	N 4000	1854 - 1005	60 W.Flood -

Power supply options (remote only)

EC030W-350 0-10V EldoLED ECOdrive 30W for 1 fixture	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--




Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

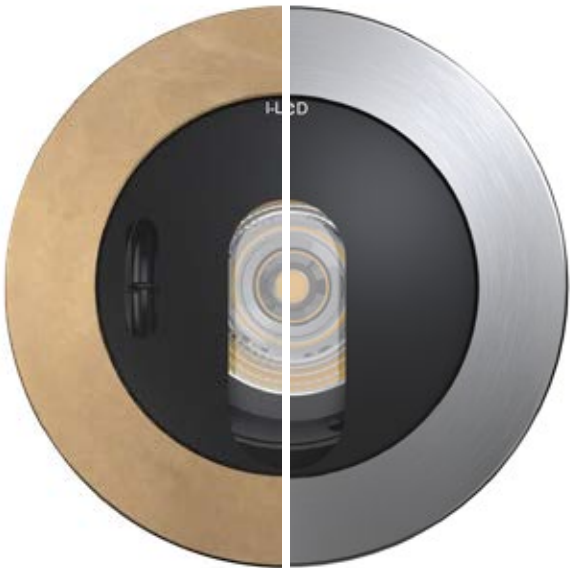

Orma Trim Semi-Flush
Adjustable Brass

Orma Trim Semi-Flush
Adjustable Steel

Orma Semi-Flush Trim | Frosted | 2.5" Ø



C.C. 1W DC - 350mA	Cct	Im S - D	Optic
Steel/Alu E81211	M 2700	136 - 17	00 General (117°)
Brass/Alu E84318	W 3000	145 - 18	
	N 4000	155 - 19	

Power supply options (remote only)

EC030W-350 0-10V EldoLED EC0drive 30W for 1-10 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-20 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-40 fixtures
---	---	---

C.V. 1.5W DC - 24 VDC	Cct	Im S - D	Optic
Steel/Alu E81212	M 2700	136 - 17	00 General (117°)
Brass/Alu E84319	W 3000	145 - 18	
	N 4000	155 - 19	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--


E99650

Concrete
Casing
PVC




E83203

Tile
Casing
PVC



Orma Semi-Flush Trim | Frosted | 3.8" Ø



C.C. 2W DC - 630mA	Cct	Im S - D	Optic
Steel/Alu E81213	M 2700	249 - 25	00 General (118°)
Brass/Alu E84320	W 3000	266 - 26	
	N 4000	284 - 28	

Power supply options (remote only)

EC030W-630 0-10V EldoLED EC0drive 30W for 1-10 fixtures	SOLO50W-630 0-10V EldoLED SOLOdrive 50W for 1-16 fixtures	SOLO100W-630 0-10V EldoLED SOLOdrive 100W for 1-32 fixtures
---	---	---

C.V. 2.5W DC - 24 VDC	Cct	Im S - D	Optic
Steel/Alu E81214	M 2700	249 - 25	00 General (118°)
Brass/Alu E84321	W 3000	266 - 26	
	N 4000	284 - 28	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--


E99651

Concrete
Casing
PVC




E83201

Tile
Casing
PVC



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Semi-Flush Trim | Frosted | 5.4" Ø



C.C. 4W DC - 350mA	Cct	lm S - D	Optic
Steel/Alu E81215	M 2700	490 - 90	00 General (116°)
Brass/Alu E84322	W 3000	490 - 90	
	N 4000	529 - 97	

Power supply options (remote only)

EC030W-350 0-10V EldoLED EC0drive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---

C.V. 5W DC - 24 VDC	Cct	lm S - D	Optic
Steel/Alu E81216	M 2700	490 - 90	00 General (116°)
Brass/Alu E84323	W 3000	490 - 90	
	N 4000	529 - 97	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--


E99652

Concrete
Casing
PVC



E83202


Tile
Casing
PVC



Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.


INSTALLATION

Installation in a few quick steps (**Recessed casing E99563 + Orma Trim Flush Adjustable E81207W15**)

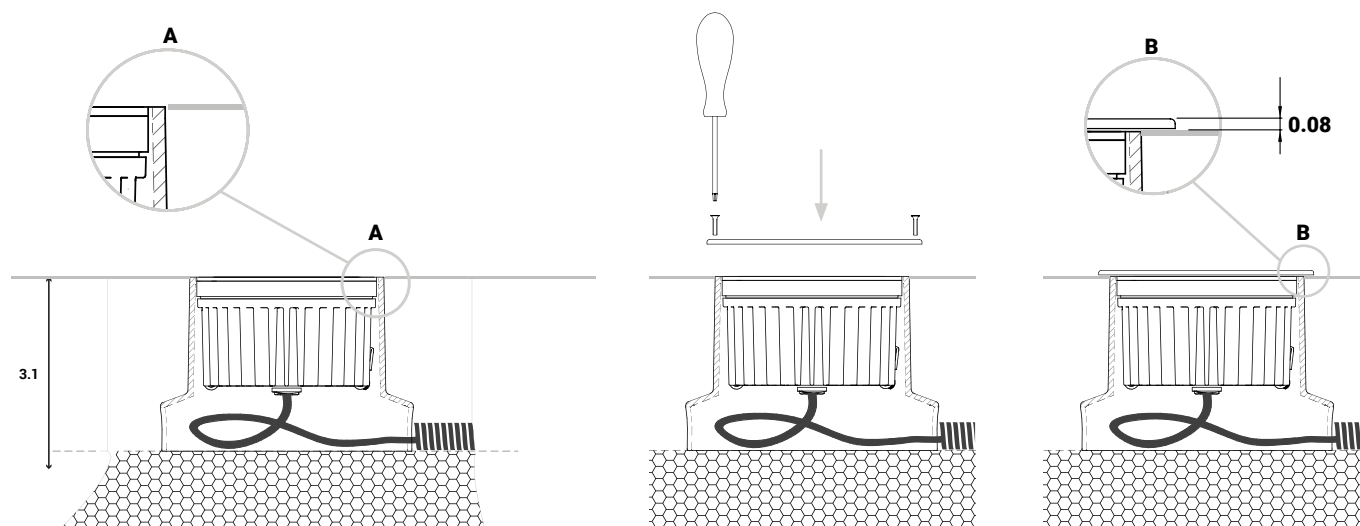


LOCKING SYSTEM

Technologically advanced outer casings that offer maximum aiming stability when using the adjustable version of the equipment thanks to the special grooves that stabilise the screw and prevent rotation thereof over time.

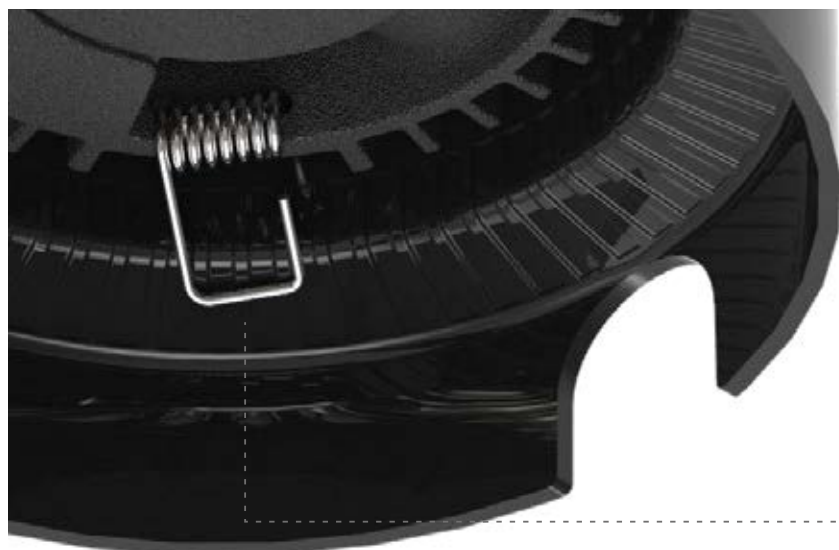

Maximum aiming stability when using the tilting version (Orma Trim Flush Adjustable)



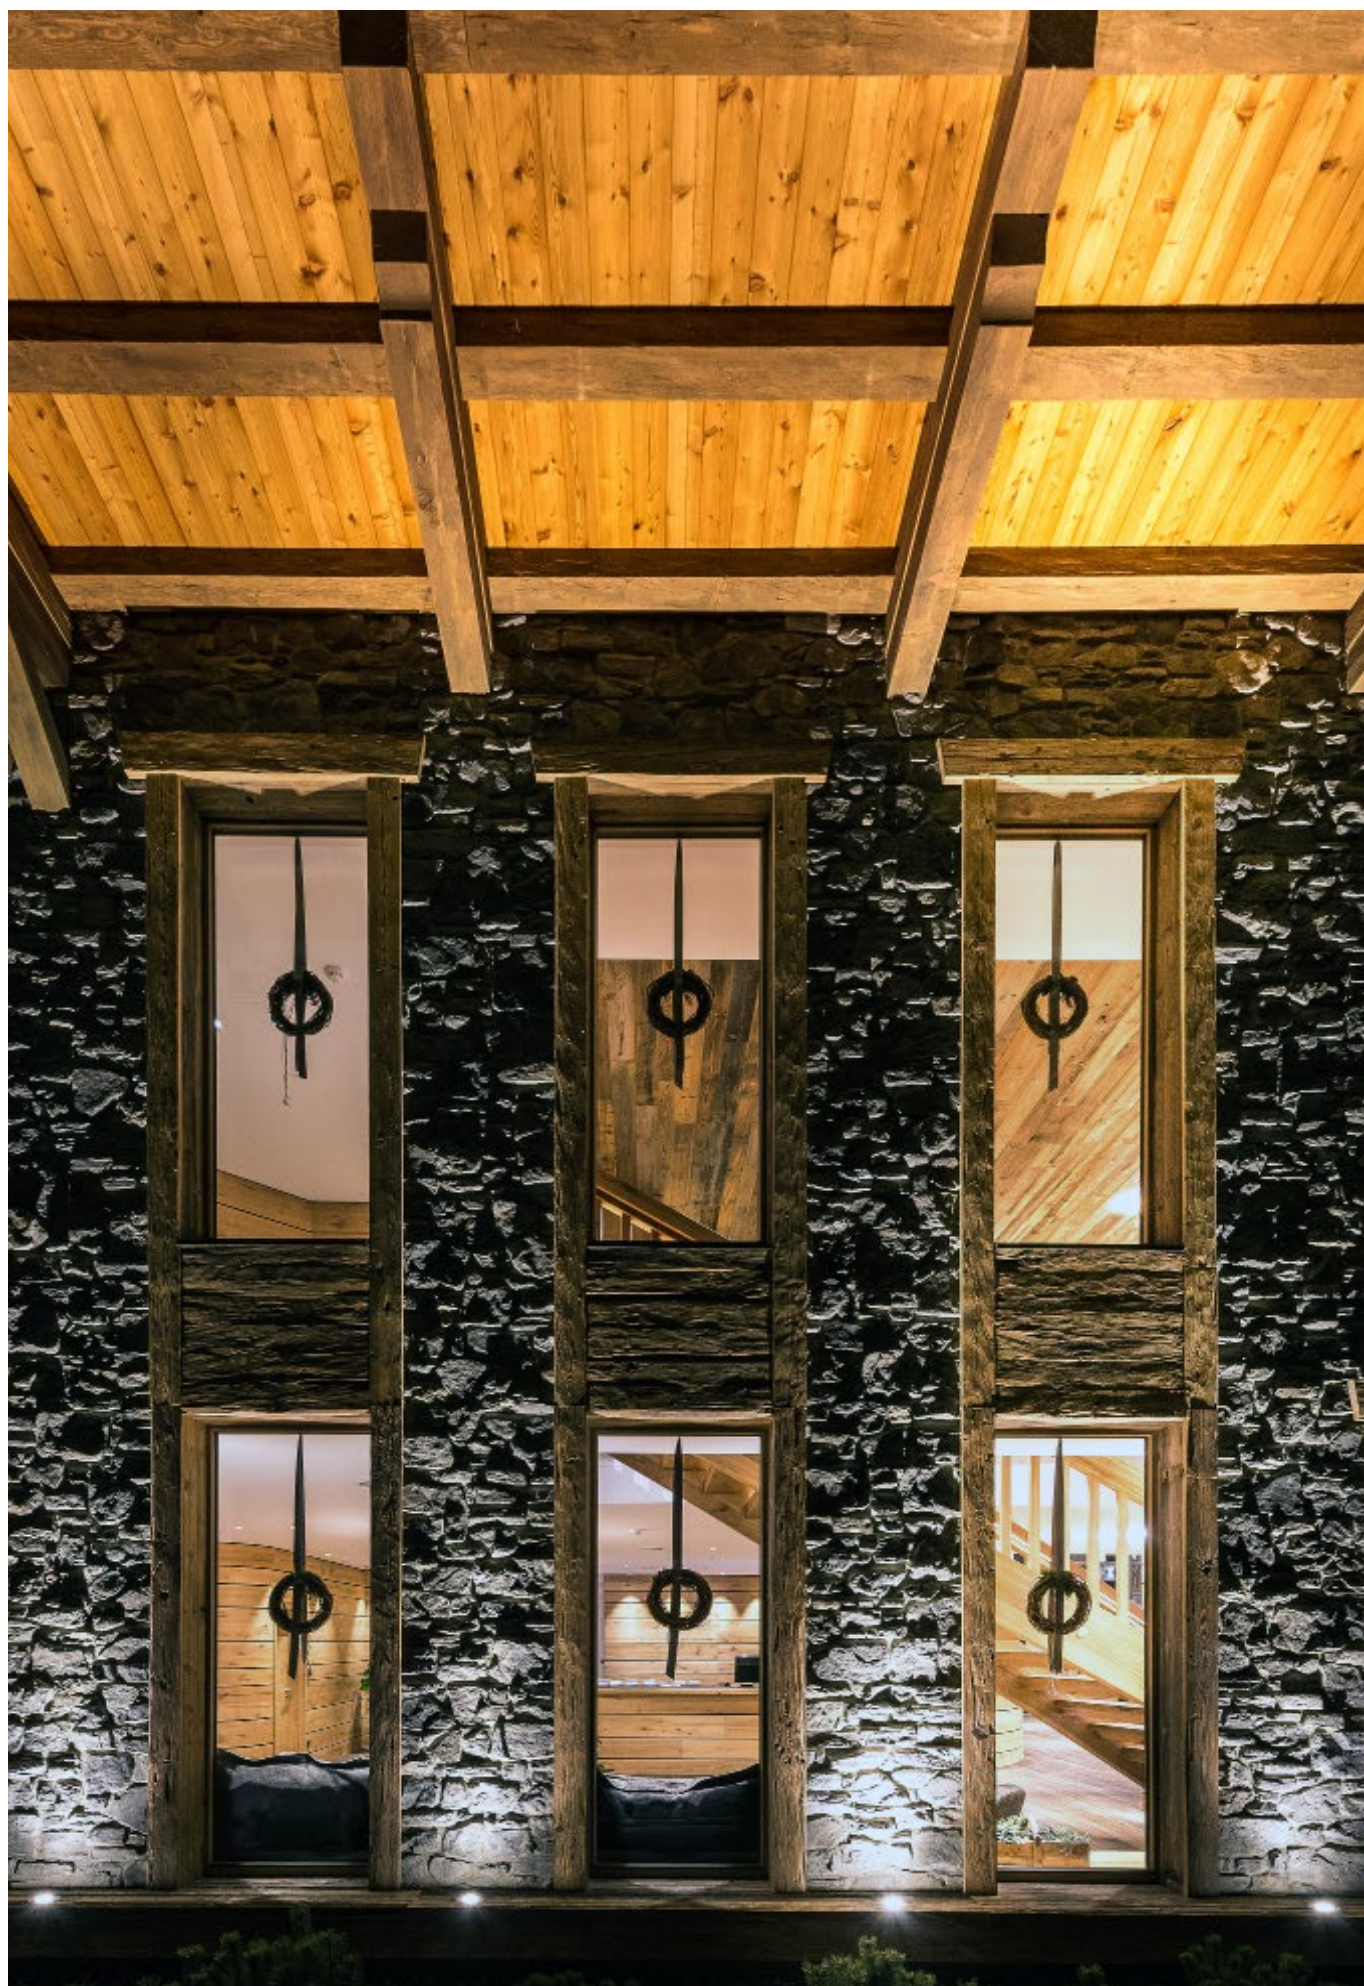




orma

Materials

Aluminium body

AISI 316L stainless steel flange

Orma Flush Trim | Wall Washer | 2.1" Ø



C.C. 4W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu E83631	M 2700	490 - 129	07 Asymm. -
	W 3000	490 - 129	
	N 4000	529 - 140	

Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EidoLED ECOdrive 30W for 1-3 fixtures	0-10V EidoLED SOLOdrive 50W for 1-6 fixtures	0-10V EidoLED SOLOdrive 100W for 1-12 fixtures


C.V. 24 V - 5W DC	Cct	lm S - D	Optic
Steel/Alu E83633	M 2700	490 - 129	07 Asymm. -
	W 3000	490 - 129	
	N 4000	529 - 140	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E99650 Concrete Casing PVC	Ø2.2 3 Ø3.8	E99560* Round Vandal Resistant Casing PVC	Ø2.8 3.1 Ø3.8
E99855* Square Vandal Resistant Casing PVC	2.9 3.1 Ø3.8	E83203 Tile Casing PVC	3 Ø2.2

Orma Flush Trim | Wall Washer | 3.3" Ø



C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
Steel/Alu E83635	M 2700	1080 - 300	07 Asymm. -
	W 3000	1126 - 313	
	N 4000	1188 - 330	

Power supply options (remote only)

ECO30W-220	SOLO50W-220	SOLO100W-220
0-10V EidoLED ECOdrive 30W for 1 fixture	0-10V EidoLED SOLOdrive 50W for 1-2 fixtures	0-10V EidoLED SOLOdrive 100W for 1-4 fixtures


C.V. 24 V - 9W DC	Cct	lm S - D	Optic
Steel/Alu E83637	M 2700	1193 - 333	07 Asymm. -
	W 3000	1244 - 347	
	N 4000	1313 - 366	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

E99651 Concrete Casing PVC	Ø3.4 3 Ø4.5	E99563* Round Vandal Resistant Casing PVC	Ø4.1 3.1 Ø4.5
E99856* Square Vandal Resistant Casing PVC	4.1 3.1 Ø114	E83201 Tile Casing PVC	3 Ø3.4

Orma Flush Trim | Wall Washer | 4.9" Ø



C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu E83639	M 2700	1724 - 598	07 Asymm. -
	W 3000	1724 - 598	
	N 4000	1854 - 643	



Power supply options (remote only)

ECO30W-350	SOLO50W-350	SOLO100W-350
0-10V EidoLED ECOdrive 30W for 1 fixture	0-10V EidoLED SOLOdrive 50W for 1-2 fixtures	0-10V EidoLED SOLOdrive 100W for 1-4 fixtures

E99652 Concrete Casing PVC	Ø5 3 Ø6.1	E99564 Round Vandal Resistant Casing PVC	Ø5.7 3.1 Ø6.1
E99857* Square Vandal Resistant Casing PVC	5.7 3.1 Ø6.1	E83202 Tile casing PVC	3 Ø5

NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Orma Semi-Flush Trim | Wall Washer | 2.5" Ø



C.C. 4W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu E83630	M 2700	490 - 129	07 Asymm. -
Brass/Alu E84310	W 3000	490 - 129	
	N 4000	529 - 140	



Power supply options (remote only)

ECO30W-350 0-10V EldoLED ECODrive 30W for 1-3 fixtures	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-6 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-12 fixtures
--	--	---



C.V. 24 V - 5W DC	Cct	lm S - D	Optic
Steel/Alu E83632	M 2700	490 - 129	07 Asymm. -
Brass/Alu E84311	W 3000	490 - 129	
	N 4000	529 - 140	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Semi-Flush Trim | Wall Washer | 3.8" Ø



C.C. - 8W DC 220 mA	Cct	lm S - D	Optic
Steel/Alu E83634	M 2700	1080 - 300	07 Asymm. -
Brass/Alu E84312	W 3000	1126 - 313	
	N 4000	1188 - 330	



Power supply options (remote only)

ECO30W-220 0-10V EldoLED ECODrive 30W for 1 fixture	SOLO50W-220 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-220 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--



C.V. 24 V - 9W DC	Cct	lm S - D	Optic
Steel/Alu E83636	M 2700	1193 - 333	07 Asymm. -
Brass/Alu E84313	W 3000	1244 - 347	
	N 4000	1313 - 366	

Power supply options (remote only)

OT96-D010 Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	OT96-JBX Osram, Non-dim 24VDC, 120-277VAC, Wet location
--	--



Orma Semi-Flush Trim | Wall Washer | 5.4" Ø



C.C. - 12W DC 350 mA	Cct	lm S - D	Optic
Steel/Alu E83638	M 2700	1724 - 598	07 Asymm. -
Brass/Alu E84314	W 3000	1724 - 598	
	N 4000	1854 - 643	

Power supply options (remote only)


ECO30W-350 0-10V EldoLED ECODrive 30W for 1 fixture	SOLO50W-350 0-10V EldoLED SOLOdrive 50W for 1-2 fixtures	SOLO100W-350 0-10V EldoLED SOLOdrive 100W for 1-4 fixtures
---	--	--




Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.

Wall Washer Optics

Optics conceived for wall and floor recessed installation, they allow the creation of perfectly marked and visible luminous paths. The particular Washer optics allow the luminous cone to be sectioned in favour of high visual comfort and to be easily directed so that the positioning is not restricted in the installation phase.

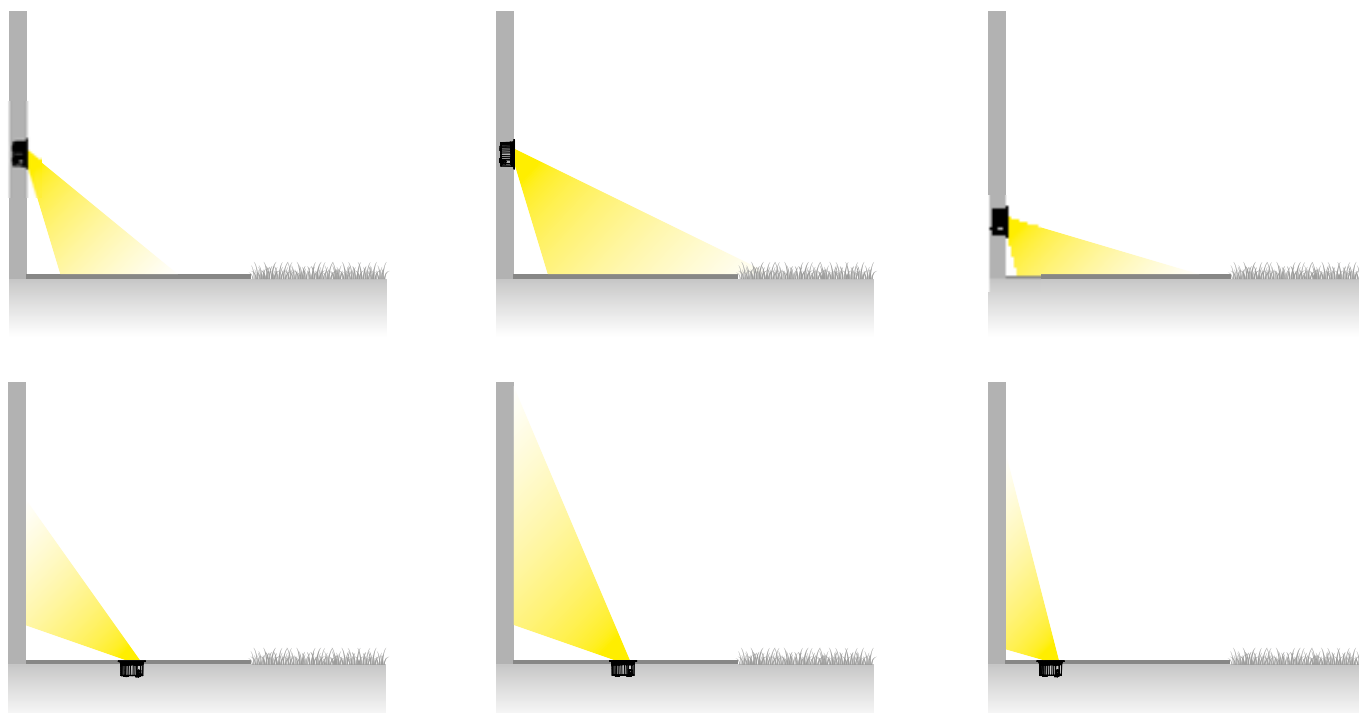

Thanks to the tilting system built into the optics compartment, Orma Wall Washer is able to adapt to different installation heights, defining the diffusion of the light up the 9.8 feet away from the source.

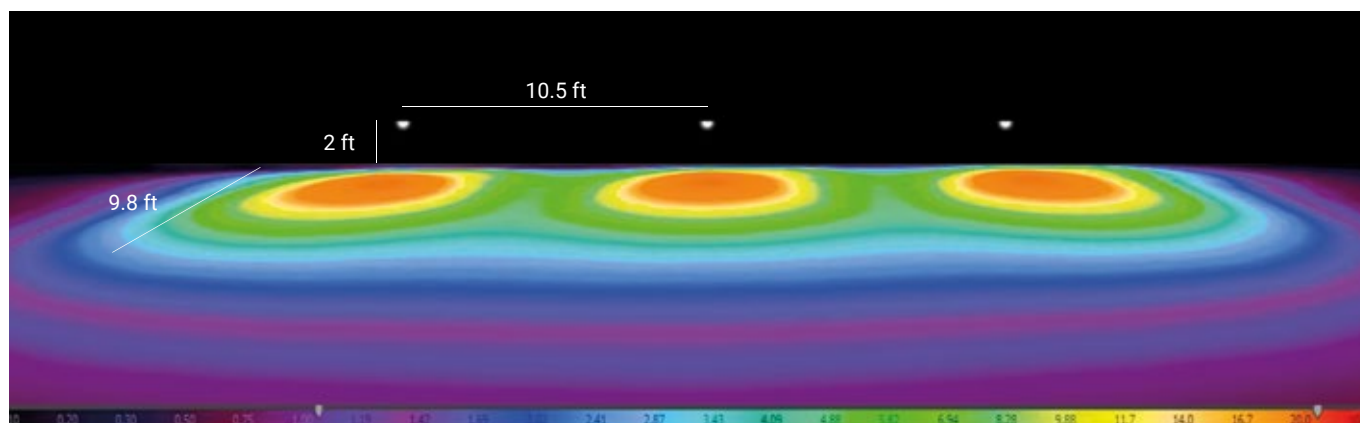

orma


Materials

Aluminum body

AISI 316L stainless steel flange



Orma Flush Trim | Blade | 2.5" Ø



C.C. - 8W DC 630 mA	Cct	lm S - D	Optic
Steel/Alu E83642	M 2700	1080 - 219	18 E.W.Flood -
	W 3000	1126 - 219	
	N 4000	1188 - 236	


Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECODrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures


C.V. 9W DC 24VDC	Cct	lm S - D	Optic
Steel/Alu E83643	M 2700	1193 - 219	18 E.W.Flood -
	W 3000	1244 - 219	
	N 4000	1313 - 236	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location

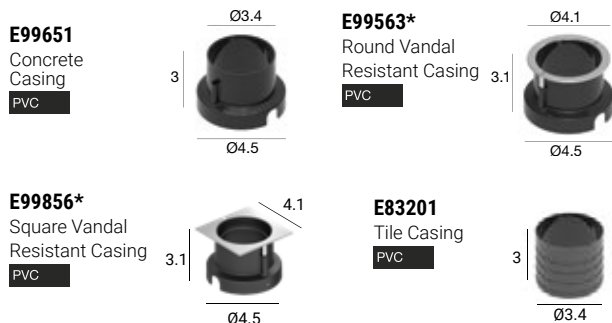

Orma Semi-Flush Trim | Blade | 3.8" Ø



C.C. - 8W DC 630 mA	Cct	lm S - D	Optic
Steel/Alu E83644	M 2700	1080 - 219	18 E.W.Flood -
Brass/Alu E84316	W 3000	1126 - 219	
	N 4000	1188 - 236	

Power supply options (remote only)

ECO30W-630	SOLO50W-630	SOLO100W-630
0-10V EldoLED ECODrive 30W for 1-3 fixtures	0-10V EldoLED SOLOdrive 50W for 1-4 fixtures	0-10V EldoLED SOLOdrive 100W for 1-8 fixtures

C.V. 9W DC 24VDC	Cct	lm S - D	Optic
Steel/Alu E83645	M 2700	1193 - 219	18 E.W.Flood -
Brass/Alu E84317	W 3000	1244 - 219	
	N 4000	1313 - 236	

Power supply options (remote only)

OT96-D010	OT96-JBX
Osram, 10% 0-10V dim, 96W, 24VDC, 120-277VAC, supplied in a Dry location enclosure	Osram, Non-dim 24VDC, 120-277VAC, Wet location



NOTE: Using a Square Trim casing or a Vandalproof Round casing will make the fixture Semi-Flush.
Delivered lumens shown are for 35 Flood, 30 Flood or 00 General optic and without glare control (HC or DL).
Rated for temporary submersion up to 15' depth for up to a maximum of 1 hr and 30 min.
NOT suitable for submersible installations.
Inter-lux reserves the right to make technical changes without notice.





Your Light | Future Proof