


ProTools 60 Linear Downlight



6" / 12" Recessed

- 2.4" aperture, integrated solution that is compatible with all ceiling types
- Standard 6" and 12" lengths
- Control and connectivity options
- Choice of beam spreads to accommodate all applications
- Extreme brightness control and the elimination of disturbing glare
- Modularity of insert modules for ultimate design flexibility
- Consistent LED technology throughout the Whitegoods product range
- Flicker-free full range dimming with standard driver (Eldoled)
- Manufactured in the USA

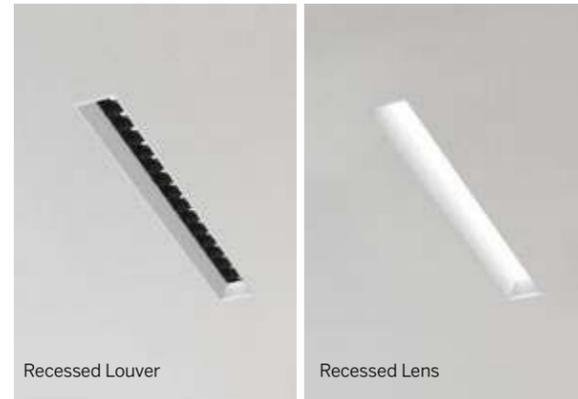


- Housing** Precision extruded aluminum for true dimensions and tolerances
Toolless component assembly from below
Perfect fit with inserts, louvers and lenses
Standard 6" and 12" lengths
Recessed snap-in cover for non-illuminated section
Finishes: white, black, silver and custom
- Integration** Fixation into gypsum, hard ceilings and all grid ceiling types
- Distribution** 35, 50, 80, 105 degree symmetrical downlight and wall wash
- LED** >90 CRI, 3-Step MacAdam, 2700-4000K static white
3W - 15W per foot, 180 nominal lumens per watt average
RA 91-94 (2700-4000K)
L70 (TM21 Projected 85C) Static White / Tunable White = 72,000 hours
Tuneable white 2200-4000K, 80 lumens per watt average
- Optic** RML - recessed micro-prismatic lens | diffusion with maximum efficiency
ROL - regressed opal acrylic lens | evenly illuminated line of light
RLW/RLB - recessed louver white (W) or black (B) | extreme cutoff
LML - Linear micro-prismatic lens - diffusion and efficiency for wall wash
- Reflector** White: high efficiency (standard with RLW)
Black: no brightness (standard with RLB, not offered with LML)
Silver: low brightness
All 15% gloss
Custom finish available
- Driver** Compatible with quality constant current drivers
- Connectivity** POE
Wireless
- Weight** 4lbs per foot
- Operating Temp** Suitable for operation in maximum ambient temperature of 35C (95F)
- Warranty** 5-year Limited (see complete company warranty information)
- Certifications** ETL and ETL-C for dry and damp location, CE, Chicago plenum
- Voltages** 120-277VAC



Recessed Micro-prismatic Lens (RML)

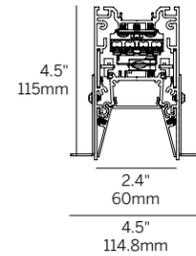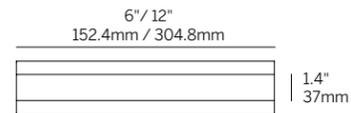



Regressed Opal Lens (ROL)



Recessed Louver (RLW, RLB)

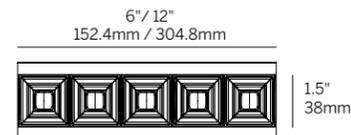

Recessed Lens + Wall Wash (LML + WW)

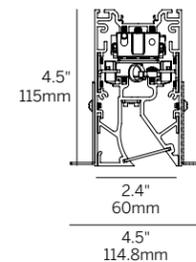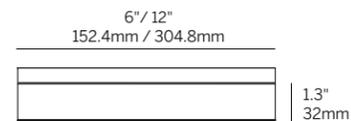

ProTools 60 Linear Downlight

6" / 12" Recessed

Model	Fixation	Pattern	Length	CRI/CCT	Optic	Beam	Power ²	Driver ³	Housing Finish ⁴	Reflector Finish ⁴	Options
WG-60PTL	RPT RBT	S	6 12	927 930 935 940 TW ¹	RML	80	P1	E1	W	W	CP
					ROL	105	P2 P3 P4	L1 POE BT DALI TQ	B S F	B S F	EM NYC TF
					RLW RLB	35 50					
					LML	WW					

Model

- WG-60PTL = ProTools 60 Linear Downlight 6" / 12" Recessed

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling

Pattern

- S = Straight run

Length

- 6 = 6"
- 12 = 12"

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K¹

Optic

- RML = Recessed micro-prismatic lens
- ROL = Regressed opal lens
- RLW = Recessed louver white (supplied with white reflectors standard)
- RLB = Recessed louver black (supplied with black reflectors only)
- LML = Linear micro-prismatic lens

Beam

- 80 = 80° (RML)
- 105 = 105° (ROL)
- 35 = 35° (RLW, RLB)
- 50 = 50° (RLW, RLB)
- WW = Wall Wash (LML)

Power²

- P1 = 3W/ft
- P2 = 6W/ft
- P3 = 10W/ft
- P4 = 15W/ft

Driver (Remote)³

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
- DALI = EldoLED Dali DT8 0.1% (120-277V)
- TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)

Housing / Trim Finish⁴


- W = White, 15% gloss, Tiger Drylac 49/11350 (standard)
- B = Black, 15% gloss, Tiger Drylac 44/90053
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

Reflector Finish⁴


- W = White, 15% gloss, Tiger Drylac 49/11350 (standard with RLW)
- B = Black, 15% gloss, Tiger Drylac 44/90053 (standard with RLB, not offered with LML)
- S = Silver, 15% gloss, Tiger Drylac 49/90500
- F = Custom finished trim, specify RAL

Options

- CP = Chicago Plenum Rated
- EM = Emergency (remote)
- NYC = 6' whip per run
- TF = Top feed



Plaster trim (RPT)



Recessed trim (RBT)

Whitegoods reserves the right to change any information without prior notice.

Notes

- 1 TW only available with RML/ROL/LML for P2 and P3.
- 2 Refer to specsheet for delivered lumen data for all product configurations.
- 3 See power supply page for details.
- 4 See Tiger Drylac color chart: inter-lux.com/tiger