


ProTools 60 Linear Downlight

6" / 12" Recessed

- 2.4" aperture, integrated solution that is compatible with all ceiling types
- Standard 6" and 12" lengths
- Control and connectivity options
- Choice of beam spreads to accommodate all applications
- Extreme brightness control and the elimination of disturbing glare
- Modularity of insert modules for ultimate design flexibility
- Consistent LED technology throughout the Whitegoods product range
- Flicker-free full range dimming with standard driver (Eldoled)
- Manufactured in the USA

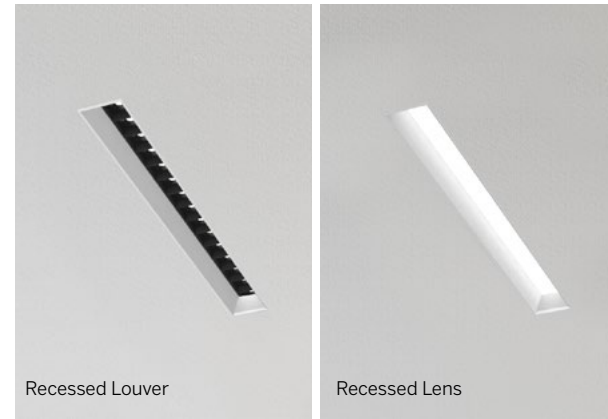

Housing Precision extruded aluminum for true dimensions and tolerances
Toolless component assembly from below
Perfect fit with inserts, louvers and lenses
Standard 6" and 12" lengths
Recessed snap-in cover for non-illuminated section
Finishes: white, black, silver and custom

Integration Fixation into gypsum, hard ceilings and all grid ceiling types

Distribution 35, 50, 80, 105 degree symmetrical downlight and wall wash

LED >90 CRI, 3-Step MacAdam, 2700-4000K static white
3W - 15W per foot, 180 nominal lumens per watt average
RA 91-94 (2700-4000K)
L70 (TM21 Projected 85C) Static White / Tunable White = 72,000 hours
Tuneable white 2200-4000K, 80 lumens per watt average

Optic RML - recessed micro-prismatic lens | diffusion with maximum efficiency
ROL - regressed opal acrylic lens | evenly illuminated line of light
RLW/RLB - recessed louver white (W) or black (B) | extreme cutoff
LML - Linear micro-prismatic lens - diffusion and efficiency for wall wash

Reflector White: high efficiency (standard with RLW)
Black: no brightness (standard with RLB, not offered with LML)
Silver: low brightness
All 15% gloss
Custom finish available

Driver Compatible with quality constant current drivers

Connectivity POE
Wireless

Weight 4lbs per foot



Operating Temp Suitable for operation in maximum ambient temperature of 35C (95F)

Warranty 5-year Limited (see complete company warranty information)



Certifications ETL and ETL-C for dry and damp location, CE, Chicago plenum

Voltages 120-277VAC



Recessed Micro-prismatic Lens (RML)

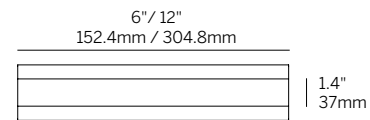



Regressed Opal Lens (ROL)

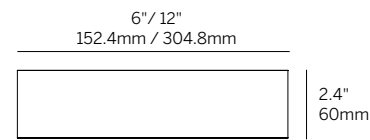

Recessed Louver (RLW, RLB)

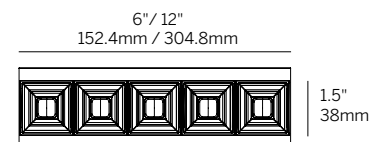

Recessed Lens + Wall Wash (LML + WW)

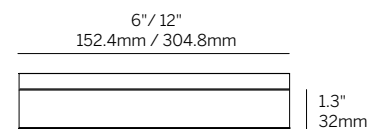

ProTools 60 Linear Downlight

6" / 12" Recessed

Model	Fixation	Pattern	Length	CRI/CCT	Optic	Beam	Power ²	Driver ³	Housing Finish ⁴	Reflector Finish ⁴	Options
WG-60PTL	RPT RBT	S	6 12	927 930 935 940 TW ¹	RML	80	P1	E1	W (std)	W	CP
					ROL	105	P2 P3 P4	B S F	B S F	EM NYC TF WC	
					RLW RLB	35 50		BT DALI TQ			
					LML	WW					

Model

- WG-60PTL = ProTools 60 Linear Downlight 6" / 12" Recessed

Fixation

- RPT = Recessed plaster trim
- RBT = Recessed trim for hard ceiling

Pattern

- S = Straight run

Length

- 6 = 6"
- 12 = 12"

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K¹

Optic

- RML = Recessed micro-prismatic lens
- ROL = Regressed opal lens
- RLW = Recessed louver white (supplied with white reflectors standard)
- RLB = Recessed louver black (supplied with black reflectors only)
- LML = Linear micro-prismatic lens

Beam

- 80 = 80° (RML)
- 105 = 105° (ROL)
- 35 = 35° (RLW, RLB)
- 50 = 50° (RLW, RLB)
- WW = Wall Wash (LML)

Power²

- P1 = 3W/ft
- P2 = 6W/ft
- P3 = 10W/ft
- P4 = 15W/ft

Driver (Remote)³


- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- PoE = Power over Ethernet
- BT = Wireless CAS - Casambi (Must specify BT with E1 or DALI)
- DALI = EldoLED Dali DT8 0.1% (120-277V)
- TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)

Housing / Trim Finish⁷


- W = White, 15% gloss, RAL 9003 / Tiger Drylac 049/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL
- W = White, 15% gloss, RAL 9003 / Tiger Drylac 049/11350 (standard with RLW)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053 (standard with RLB, not offered with LML)
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Options

- CP = Chicago Plenum Rated
- EM = Emergency (remote)
- NYC = 6' whip per run
- TF = Top feed
- WC = Wood Ceiling (trimless - accessible ceilings only)



Plaster trim (RPT)



Recessed trim (RBT)

Whitegoods reserves the right to change any information without prior notice.

Notes

- TW only available with RML/ROL/LML for P2 and P3.
- Refer to specsheet for delivered lumen data for all product configurations.
- See power supply page for details.
- See Tiger Drylac color chart: inter-lux.com/tiger