


ProTools 60 Linear Downlight

6" / 12" Surface Mount

- 2.4" aperture, integrated solution that is compatible with all ceiling types
- Standard and tailored run lengths, including corners
- Downlight, Wall Wash and wall graze distribution
- Modularity of insert modules for ultimate design flexibility
- Extreme brightness control eliminates disturbing glare
- Consistent LED technology throughout the Whitegoods product range
- Flexible design allows exact wall-to-wall dimensions
- Flicker-free full range dimming with standard driver (Eldoled)
- Manufactured in the USA

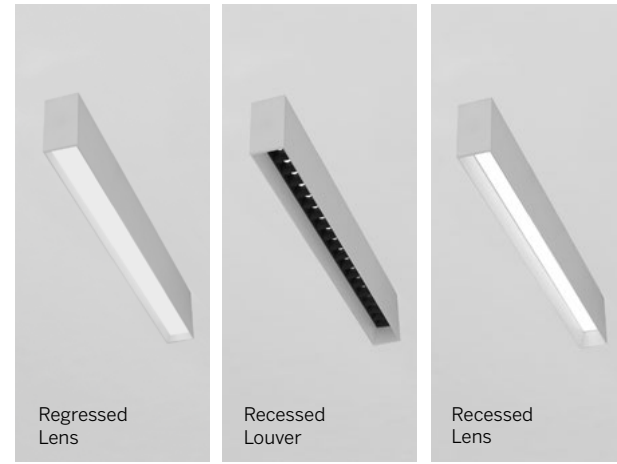

Housing Precision extruded aluminum for true dimensions and tolerances
 Toolless component assembly from below
 Perfect fit with inserts, louvers and lenses
Sure-lock mechanical connection system eliminates light leak
 Standard and tailored lengths including corner configurations
 Recessed snap-in cover for non-illuminated section
 Finishes: white, black, silver and custom

Integration Fixation onto any surface type
 End wall mechanical and power connection option

Distribution 35, 50, 80, 105 degree symmetrical downlight
 Wall Wash

LED >90 CRI, 3-Step MacAdam, 2700-4000K static white
 3W - 15W per foot, 180 nominal lumens per watt average
 RA 91-94 (2700-4000K)
 L70 (TM21 Projected 85C) Static White / Tunable White = 72,000 hours
 Tuneable white 2200-4000K, 80 nominal lumens per watt average

Optic RML - recessed micro-prismatic lens | diffusion with maximum efficiency
 ROL - regressed opal acrylic lens | evenly illuminated line of light
 RLW/RLB - recessed louver white (W) or black (B) | extreme cutoff
 LML - Linear micro-prismatic lens - diffusion and efficiency for wall wash

Reflector White: high efficiency (standard with RLW)
 Black: no brightness (standard with RLB, not offered with LML)
 Silver: low brightness
 All 15% gloss
 Custom finish available

Driver Compatible with quality constant current drivers

Connectivity POE
 Wireless

Weight 4lbs per foot



Operating Temp Suitable for operation in maximum ambient temperature of 35C (95F)

Warranty 5-year Limited (see complete company warranty information)



Certifications ETL and ETL-C for dry and damp location, CE, Chicago plenum

Voltages 120-277VAC



Recessed Micro-prismatic Lens (RML)

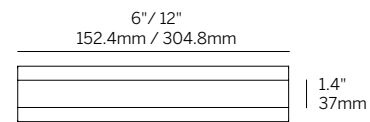



Regressed Opal Lens (ROL)

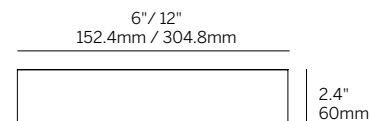

Recessed Louver (RLW, RLB)

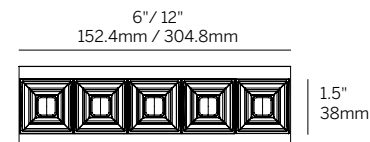

Recessed Lens + Wall Wash (LML + WW)

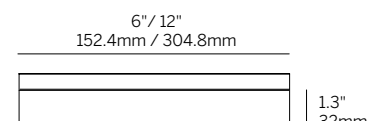

ProTools 60 Linear Downlight

6" / 12" Surface Mount

Model	Fixation	Pattern	Length ²	CRI/CCT	Optic ³	Beam	Power ⁵	Driver ⁶	Housing Finish ⁷	Reflector Finish ⁷	Options
WG-60PTL	SM	S	6 12	927 930 935 940 TW ⁴	RML ROL RLW RLB LM	80 105 35 50 WW	P1 P2 P3 P4	E1 L1 POE BT DALI TQ	W (std) B S F	W B S F	EM EW EWP

Model

- WG-60PTL = ProTools 60 Linear Downlight 6" / 12" Recessed

Fixation

- SM = Surface Mount

Pattern

- S = Straight run

Length²

- 6 = 6"
- 12 = 12"

CRI/CCT (90+ CRI)

- 927 = 2700K
- 930 = 3000K
- 935 = 3500K
- 940 = 4000K
- TW = Tuneable white 2200-4000K⁴

Optic³

- RML = Recessed micro-prismatic lens
- ROL = Regressed opal lens
- RLW = Recessed louver white (supplied with white reflectors standard)
- RLB = Recessed louver black (supplied with black reflectors only)
- LML = Linear micro-prismatic lens

Beam

- 80 = 80° (RML)
- 105 = 105° (ROL)
- 35 = 35° (RLW, RLB)
- 50 = 50° (RLW, RLB)
- WW = Wall Wash (LML)

Power⁵

- P1 = 3W/ft
- P2 = 6W/ft
- P3 = 10W/ft
- P4 = 15W/ft

Driver (Remote)⁶

- E1 = EldoLED 0.1% dimming, 0-10V (120-277V)
- L1 = Lutron 1% dimming, Ecosystem (120-277V)
- PoE = Power over Ethernet
- BT = Wireless CAS – Casambi (Must specify BT with E1 or DALI)
- DALI = EldoLED Dali DT8 0.1% (120-277V)
- TQ = T-Series for Lutron Quantum 0.1% (120-277V) (Tunable white ONLY)

Housing Finish⁷


- W = White, 15% gloss, RAL 9003 / Tiger Drylac 049/11350 (standard)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 044/90053
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Reflector Finish⁷

- W = White, 15% gloss, RAL 9003 / Tiger Drylac 49/11350 (standard with RLW)
- B = Black, 15% gloss, RAL 9005 / Tiger Drylac 44/90053 (standard with RLB, not offered with LML)
- S = Silver, 15% gloss, RAL 9006 / Tiger Drylac 049/90500
- F = Custom finished trim, specify RAL

Options

- EM = Emergency (remote)
- EW = End wall bracket
- EWP = End wall power bracket



End Caps
(2 included per run)

Whitegoods reserves the right to change any information without prior notice.

Notes

- 1 See pattern spec sheet.
- 2 Individual fixture lengths less than 2' may require remote driver.
- 3 Specify Lensed products to nearest 0.25". Specify Louvered and Tuneable White products in 6" increments for continuous light. Louver supplied in 6" increments, balance of the run will have recessed blank covers on ends. REO only available with WG.
- 4 TW only available with RML/ROL/LML for P2 and P3.
- 5 Refer to specsheet for delivered lumen data for all product configurations.
- 6 See power supply page for details.
- 7 See Tiger Drylac color chart: inter-lux.com/tiger