


ZTA.35.Surface

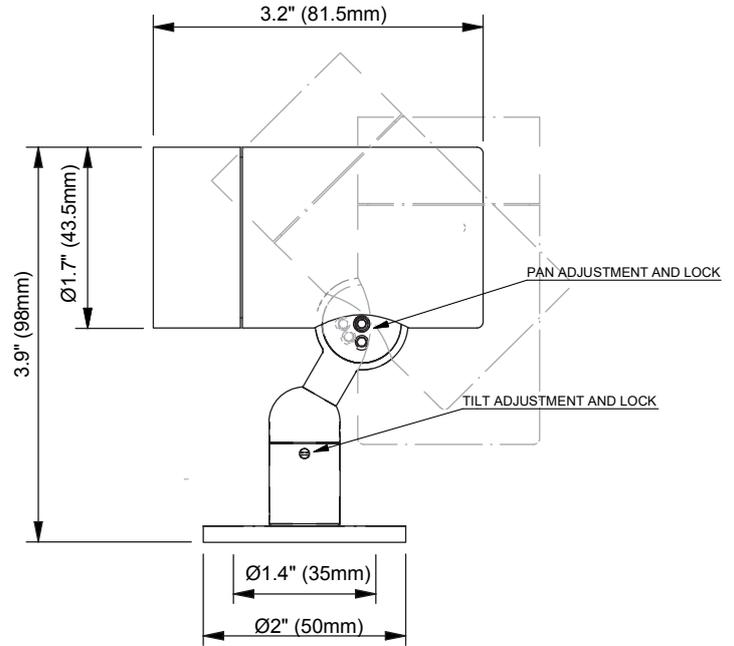

Order Code	ZTA.35.Surface.light source.beam.finish
------------	---

- Materials: Aluminum
- Mount type: Surface
- Light source: Xicato XOB COB LED
LED lifetime: L70, B0, F0 at 50,000hrs
Col consistency: 1x2 SDCM
- Output: See table over page
- Dimming: See table over page
- Finish: Standard offering is RAL 9010 Pure White or Matt Black
 Internal lamptube is Matt Black
 Bespoke finishes are available
- Supply: Remote constant current driver
- Cable: 2x0.2"(0.5mm)² (as standard: 19.7" (500mm), black)
- Locking: 2mm Allen key required
- Available tilt: 130°
- Available pan: 363°
- Weight: 0.77lbs (0.35kg)
- Description: ZTA is a truly unconstrained new product range, be that in choice of light source, optic, paint finish, control system or how it's mounted. With a simpler aesthetic, it offers versatility and a product that is truly maintainable, re-manufacturable and ultimately recyclable.
- Beams: See table over page
- Accessories: Can accommodate up to 2 x Ø1.4" (35mm) lens or louver


Low output, fixed optics and Zoom	High output, fixed optics and Zoom				
Xicato XOB 0.18" (4.5mm)	Xicato XOB 0.24" (6mm)				
Dimming Option	Dimming Option				
0-10V, DALI, Mains or Wireless (Xicato or Casambi)	0-10V, DALI, Mains or Wireless (Xicato or Casambi)				
<table border="1"> <tr> <td>CRI ≥ 90 423lm (Initial @ 3000K) 3.9W at 450mA Typ. 8.7Vf</td> <td>CRI ≥ 95 385lm (Initial @ 3000K) 3.9W at 450mA Typ. 8.7Vf</td> </tr> </table>	CRI ≥ 90 423lm (Initial @ 3000K) 3.9W at 450mA Typ. 8.7Vf	CRI ≥ 95 385lm (Initial @ 3000K) 3.9W at 450mA Typ. 8.7Vf	<table border="1"> <tr> <td>CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</td> <td>CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</td> </tr> </table>	CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf	CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf
CRI ≥ 90 423lm (Initial @ 3000K) 3.9W at 450mA Typ. 8.7Vf	CRI ≥ 95 385lm (Initial @ 3000K) 3.9W at 450mA Typ. 8.7Vf				
CRI ≥ 90 873lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf	CRI ≥ 95 798lm (Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf				
CCT	CCT				
2700K, 3000K, 3500K, or 4000K	2700K, 3000K, 3500K, or 4000K				
Beam Options	Beam Options				
Narrow (13.6°) Medium (22°) Flood (35.4°) Wide Flood (52.8°) Zoom (17.2°-46.8°)	Narrow (17.8°) Medium (23°) Flood (34.6°) Wide Flood (54.5°) Zoom (21.6°-44.9°)				

Configurations


ZTA Pole Clamp

Clamps sizes are defined by project requirements. As standard these are:


Ø1" (25.4mm) to Ø4" (101.6mm) (internal dimensions).

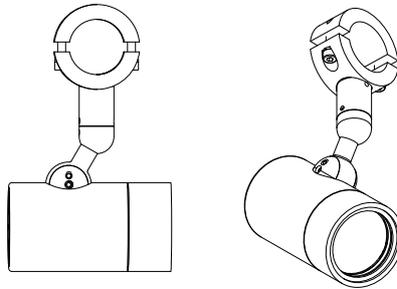


Accessories

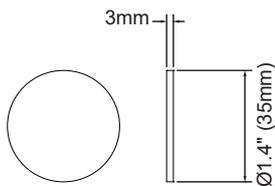


Clear lens
Frosted lens
Stipple/patterned lens
Filter

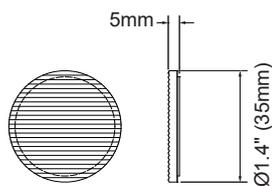

Sharp Elliptical Spread Lens

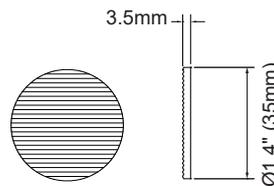


Diffuse Elliptical Spread Lens

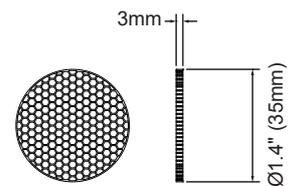

Honeycomb Louver

Wiring

Constant Current

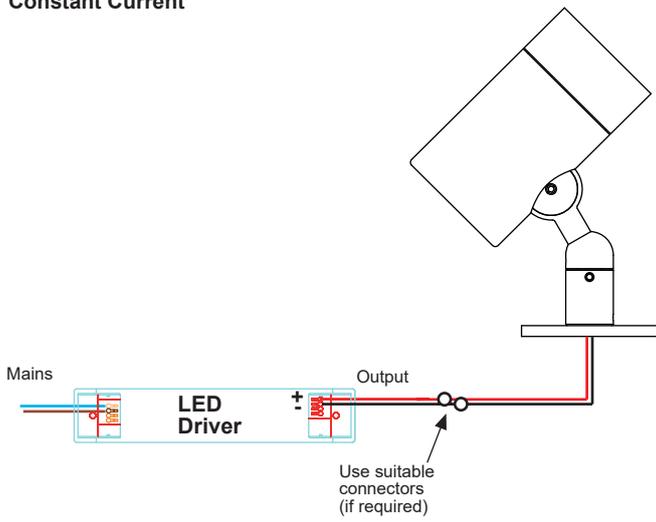

Note that while constant current light sources can be wired in series, the number of fittings that can be wired in series is limited by the forward Voltage of the LED.

ZTA Constant Voltage Wiring

