


ZTA.50.LV Stucchi

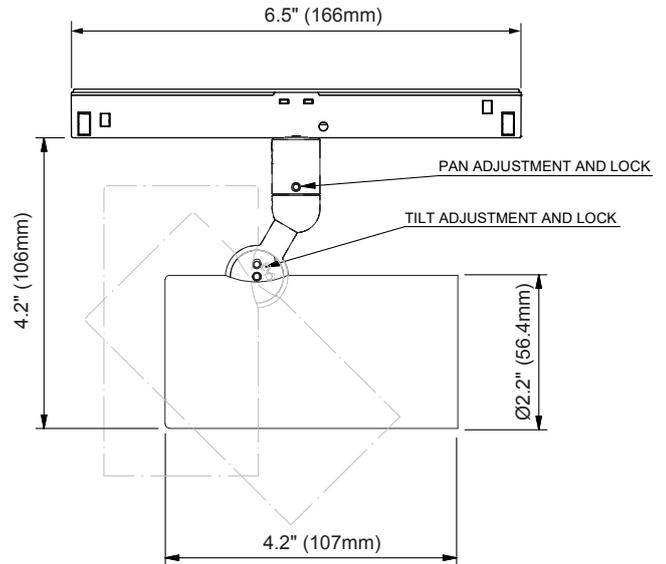

Order Code	ZTA.50.LV Stucchi.light source.beam.finish
------------	--

- Materials: Aluminum
- Mount type: Surface
- Light source: Osram Oslon Square LED
LED lifetime: L70, B1 at 66,000hrs
Col consistency: 3 SDCM
- Xicato XOB COB LED
 Xicato XTM 19mm LES LED module
LED lifetime: L70, B0, F0 at 50,000hrs
Col consistency: 1x2 SDCM
- Output: See table over page
- Dimming: See table over page
- Finish: Standard offering is RAL 9010 Pure White or Matt Black
 Internal lamptube is Matt Black
 Bespoke finishes are available
- Supply: 230/240V via 3 circuit track
- Locking: 2mm Allen key required
- Available tilt: 130°
- Available pan: 363°
- Weight: 0.9lbs (0.4kg)
- Description: ZTA is a truly unconstrained new product range, be that in choice of light source, optic, paint finish, control system or how it's mounted. With a simpler aesthetic, it offers versatility and a product that is truly maintainable, re-manufacturable and ultimately recyclable.
- Beams: See table over page
- Accessories: Can accommodate up to 2 x Ø2" (50mm) lens or louver


High output, fixed optics	Low output, fixed optics and Zoom	Dedicated Very Narrow spot	Wall wash						
Xicato XOB 0.39" (9.8mm)	Xicato XOB 0.24" (6mm)	Oslon Star	0.75" (19mm) XTM						
Dimming Option 0-10V, DALI, or Wireless (Xicato or Casambi)	Dimming Option 0-10V, DALI, or Wireless (Xicato or Casambi)	Dimming Option 0-10V, DALI, or Wireless (Xicato or Casambi)	Dimming Option 0-10V, DALI, or Wireless (Xicato or Casambi)						
<table border="0"> <tr> <td>CRI ≥ 90 1513lm <small>(Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</small></td> <td>CRI ≥ 95 1341lm <small>(Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</small></td> </tr> </table>	CRI ≥ 90 1513lm <small>(Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</small>	CRI ≥ 95 1341lm <small>(Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</small>	<table border="0"> <tr> <td>CRI ≥ 90 873lm <small>(Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</small></td> <td>CRI ≥ 95 798lm <small>(Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</small></td> </tr> </table>	CRI ≥ 90 873lm <small>(Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</small>	CRI ≥ 95 798lm <small>(Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</small>	CRI ≥ 90 252lm <small>(Initial @ 3000K) 3W at 1050mA Typ. 3Vf</small>	<table border="0"> <tr> <td>CRI ≥ 80 1630lm <small>(Initial @ 3000K) 11.4W at 500mA Typ. 22.8Vf</small></td> <td>CRI ≥ 95 1400lm <small>(Initial @ 3000K) 12.9W at 700mA Typ. 18.4Vf</small></td> </tr> </table>	CRI ≥ 80 1630lm <small>(Initial @ 3000K) 11.4W at 500mA Typ. 22.8Vf</small>	CRI ≥ 95 1400lm <small>(Initial @ 3000K) 12.9W at 700mA Typ. 18.4Vf</small>
CRI ≥ 90 1513lm <small>(Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</small>	CRI ≥ 95 1341lm <small>(Initial @ 3000K) 11.9W at 350mA Typ. 34Vf</small>								
CRI ≥ 90 873lm <small>(Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</small>	CRI ≥ 95 798lm <small>(Initial @ 3000K) 7.9W at 250mA Typ. 31.6Vf</small>								
CRI ≥ 80 1630lm <small>(Initial @ 3000K) 11.4W at 500mA Typ. 22.8Vf</small>	CRI ≥ 95 1400lm <small>(Initial @ 3000K) 12.9W at 700mA Typ. 18.4Vf</small>								
CCT 2700K, 3000K, 3500K, or 4000K	CCT 2700K, 3000K, 3500K, or 4000K	CCT 2700K, 3000K, 3500K, or 4000K	CCT 2200K, 2700K, 3000K, 3500K, 4000K or 5600K						
Beam Options Narrow (15.1°) Medium (22°) Flood (31.2°) Flood 2 (44.3°) Wide Flood (64.5°)	Beam Options Very Narrow (13.9°) Narrow (14.7°) Medium (24.1°) Flood (36.7°) Wide Flood (51.7°) Zoom (13.7°-48.1°)	Beam Options Very Narrow (3.3°)	Beam Options Wall Wash (81.3° x 53.7°)						

Wiring


The ZTA.70.LV Stucchi is supplied with a Stucchi Multisystem Evo track adaptor.

A suitable 48V supply should be connected to the track, the fittings on the track are connected in parallel.


The max number of fittings is limited by the power of the PSU.

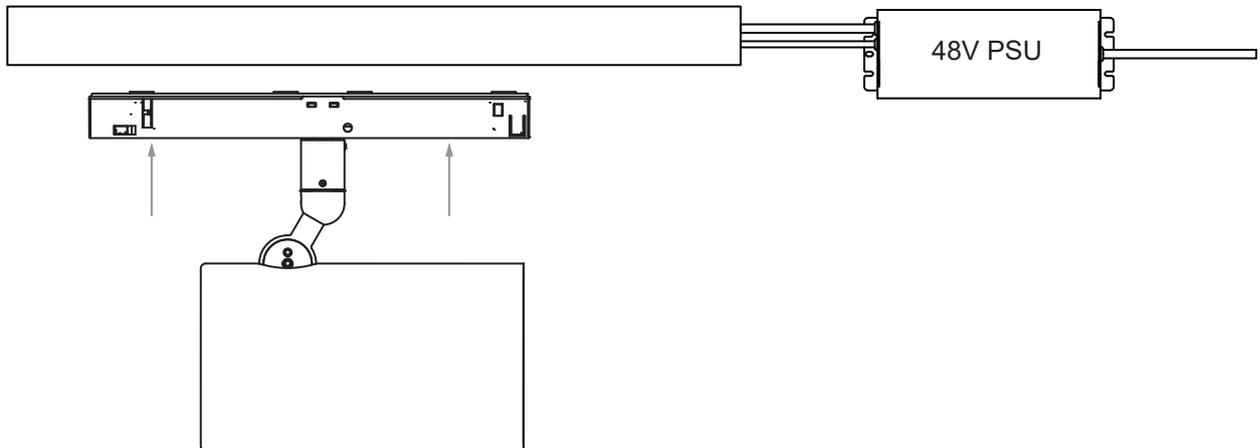


Accessories

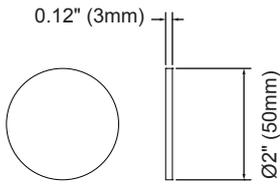


Clear lens
Frosted lens
Stipple/patterned lens
Filter

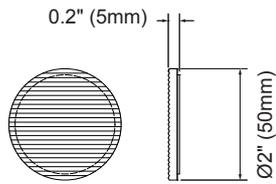

Sharp Elliptical
Spread Lens

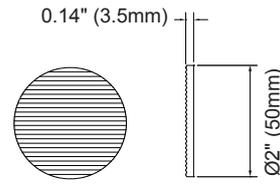


Diffuse Elliptical
Spread Lens

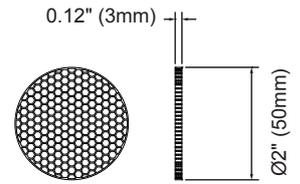


Louver

ZTA.50 Snoot

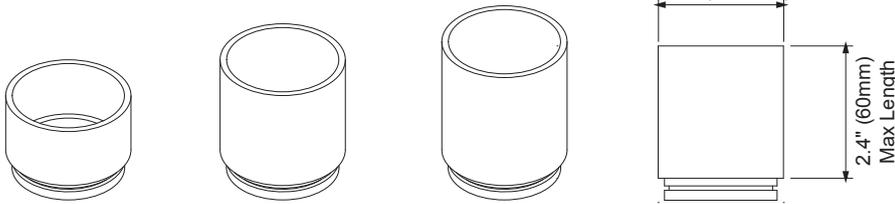

ZTA.50 Slash Cut Snoot

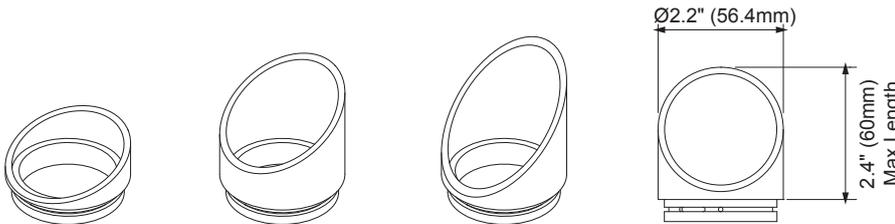

ZTA.50 Barn Doors

